

YASKAWA

Integrated Machine Controller MP3200



Certified for
ISO9001 and
ISO14001



JQA-0422



JQA-EM0202



MECHATROLINK

Integrated Machine Controller

MP3200



Offering a new way for
machine control to take shape

Contents

MP3200 Components Functions	4
-----------------------------	---

FEATURES

Motion

High Speeds and High-level Performance	6
Improved Maintainability	10
Flexible System Construction	12

Vision

High-speed Processing	14
High Performance	16
Alignment	18

MPE720 Ver.7

All the Drive Units Engineering Together	20
Easy Vision Programming	22

RELATED INFORMATION

Other Manufacturer Products	
Programmable Display	24
MECHATROLINK-compliant Devices	25
Other Modules	27
Replacement Example	29

SPECIFICATIONS

System Configuration	
MECHATROLINK-III Connection Example	30
Hardware Specifications	
Installation Conditions	32
Machine Controller Main Units	33
Optional Modules	34
Other Manufacturer Modules	49
Other Devices	51
Dimensions	52
Software Specifications	
Sequence Controls/Motion Controls	55
Support Tools	
MPE720 Version 7 System	56
Integrated Engineering Tool	

ORDER

Ordering Reference	
Order List	61
International Standards	65
Read Before Ordering	67
Product Information	68

MOTION



Takt times improved by high-speed processing

- High-speed processing of applications at speeds up to 125 μ s
- Zero delay in communicating with vision systems

Maintainability and traceability improved by batch control of information

- Operation information unified by system integration
- Logging function and FTP server functions

High-grade automation achieved by optimal control

- Motion, vision units, and robot systems integrated to enable the construction of systems best suited for your equipment needs

MP3200



Building-Block Units for Easier System Design

System design used to be complicated but is now an easy job thanks to the building-block method. Simply connect units to integrate motion, vision, and robot systems into one.

MP3200 Components Functions


PS Unit

Power supply: Both AC/DC

CPU Unit

➔ For details, see page 6.

- High speed: Fastest control of applications in the industry
- Large capacity: Construction of large-scale systems with expanded capacity for programs and registers
- High precision: Supports double-precision real-number and 64-bit integer data

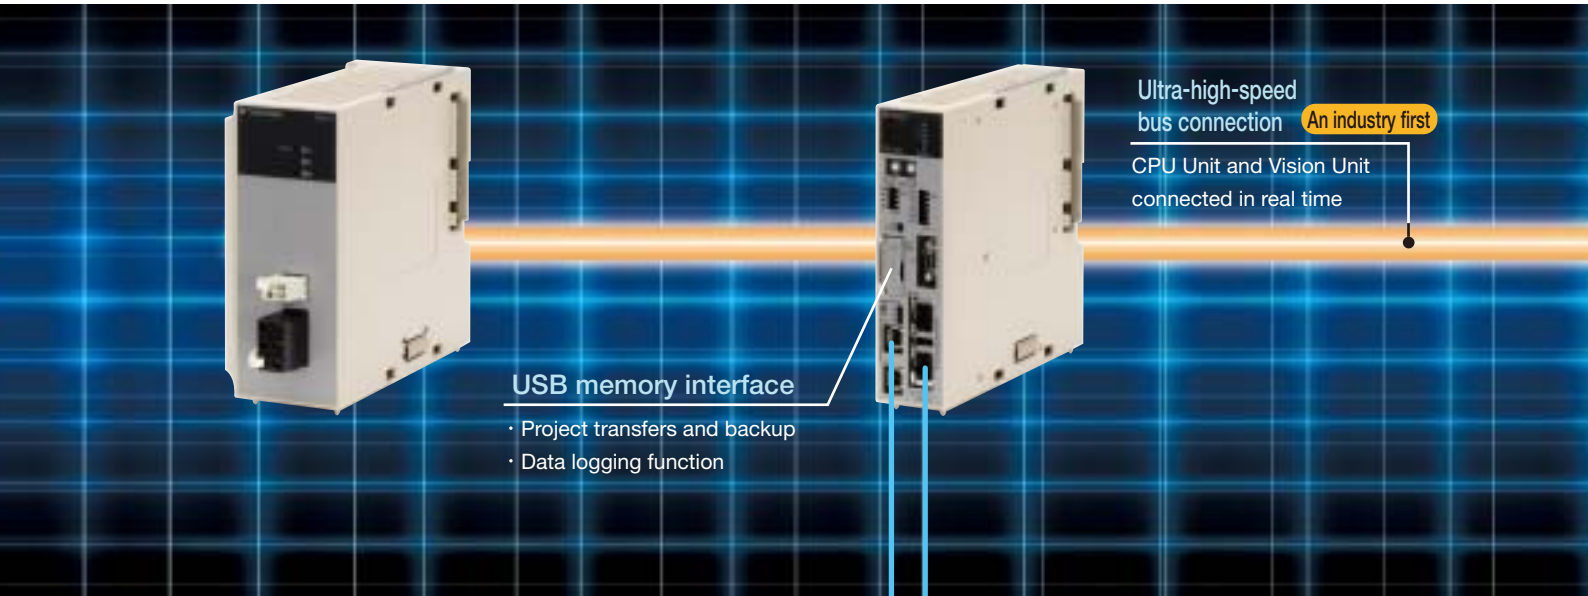

Ultra-high-speed bus connection **An industry first**

CPU Unit and Vision Unit connected in real time

USB memory interface



- Project transfers and backup
- Data logging function

Easy connection with built-in Ethernet port

- Supports protocols for major PLCs
- Programming-free connection for 10 lines
- Hub function and FTP function incorporated

Easy connection with built-in MECHATROLINK-III port

Control 32 servo-drive axes for 42 stations.

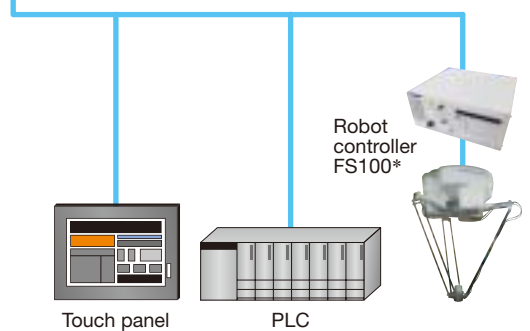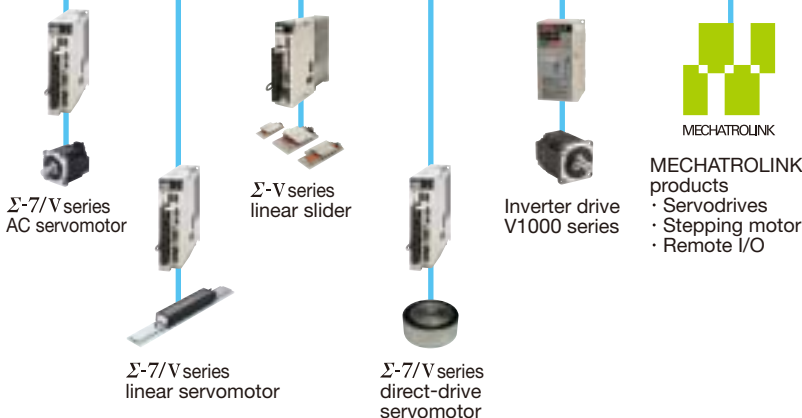

*: You can also use an EXU-001 Rack Expansion Interface Unit to connect to the bus. Contact your Yaskawa representative for information on connecting robot controllers.

Engineering environment also integrated

System integrated engineering tool

MPE720 Ver.7

➔ For details, see page 20.

- Engineering of entire systems (covering setup, adjustments, programming, maintenance, and control)
- Concurrent adjustment of multiple axes on multiple windows
- New user interface for the ultimate in viewing and operation ease



Option Unit

VISION Unit

➔ For details, see page 14.

- Ultra-high-speed processing
- High-resolution digital cameras supported
- Simple vision programming with MPE720

Base Unit

Supports all MP2000 optional modules

- Motion modules
- I/O modules
- Communication modules



Ethernet port

- Hub function featured
- Store data in USB memory device connected to CPU Unit




Select no. of slots

You can select 3 slots, 5 slots, or 8 slots depending on the scale of your systems.

4-channel Camera Link available as a standard feature

- 5-megapixel high-resolution cameras supported
- Simultaneous image capture of 4 cameras supported (independently triggered)

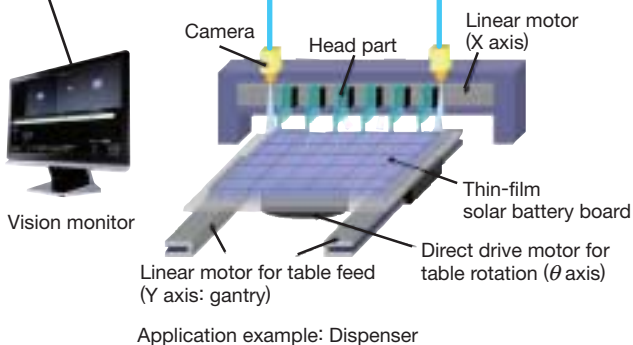

Optional modules

Any of the 30 or so MP2000 optional modules can be mounted.



High Speeds and High-level Performance

CPU-201 and -202 with the Highest Performance in the Industry

High speeds, high precision, and high-performance motion all achieved concurrently.
Clear-cut operations carried out precisely as desired.





Takt times improved by ultra-high-performance CPU

Fastest application processing in the industry: 4-axis, 125 μ s
Arithmetic processing must be performed at higher speeds for systems to work faster. The MP3200 features the CPU-202, an ultra-high-speed CPU that runs 1.5 times faster than the CPU-201, to improve takt times.

MECHATROLINK-III : 125 μ s communications cycle

Revolutionize machine accuracy and tracking control precision by combining the CPU-202 module for 125 μ s communications cycle and the Σ -7 SERVOPACKs.

When the scan time of the CPU-02=100

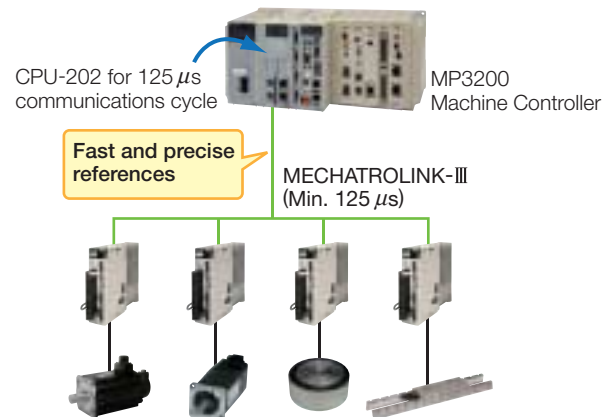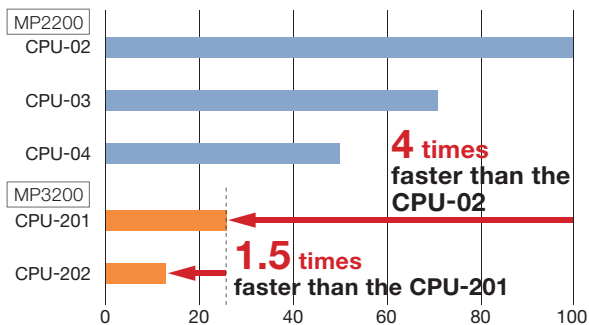


Varied applications by expanding program capacity

Application program capacity: 31 MB

The program capacity has been dramatically expanded to 31 MB (over the previous capacity of 11.5 MB) to support large-scale control systems.


The number of application drawings has also been increased significantly to support many different kinds of applications.



Controller Name	MP2200 (Conventional)	MP3200
No. of high-speed scan drawings	200 DWGs	1000 DWGs
No. of low-speed scan drawings	500 DWGs	2000 DWGs
No. of user function drawings	500 DWGs	2000 DWGs

M register capacity: 1 M words


The capacity of the M register (general-purpose register with backup capability) has been greatly expanded for use with system recipes in diversified small-quantity production.

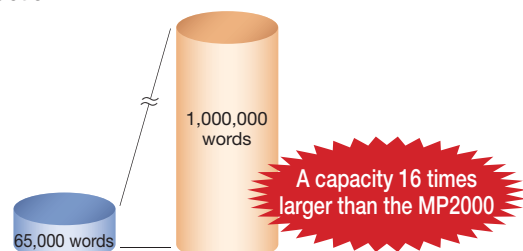

New memory area increases the speed of applications


G register: New capacity of 2 M words

A new G register, a general-purpose register (with no battery backup) has been added, making it possible to process even complex applications at higher speeds.

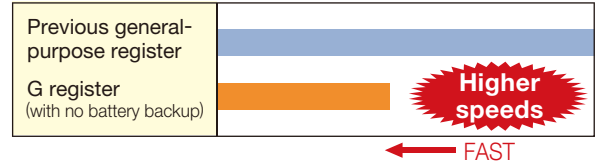

Double-precision real-number, 64-bit integer data for higher precision

■Dicer

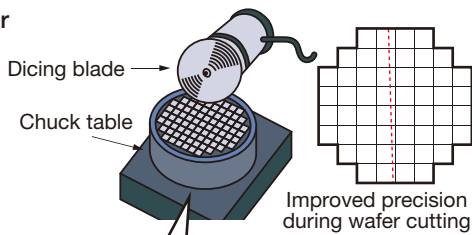

With double-precision real-number 64-bit integer data, rounding errors during arithmetic calculations are reduced, and control at higher levels of precision can be achieved.

■Dispenser




Controlling the path performance in the corner areas is an issue; however, implementing path control with a higher level of precision enhances dispensing quality.

Perfectly synchronized control for delay-free ideal operations

The MP3200 uses the ideal architecture for system control. The MP3200 executes the processing for I/O and motion, which are usually executed separately, with no delay so that an ideal level of control is achieved.


I/O control is the main feature.
Motion control is optional.

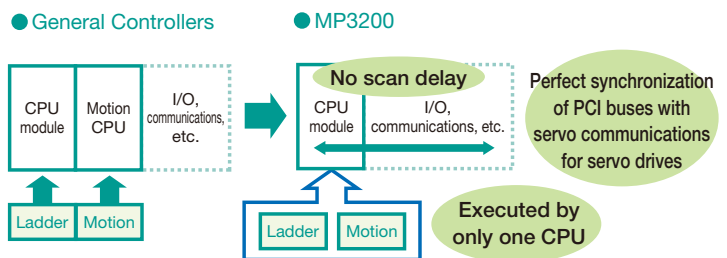

Synchronous high-speed scanning of several controllers with sub CPU functions

A maximum 4 sub CPUs can be arranged by using expansion racks. Because both the main CPU and sub CPUs control optional modules, high-speed processing can be achieved even with large programs.

Example of program configuration

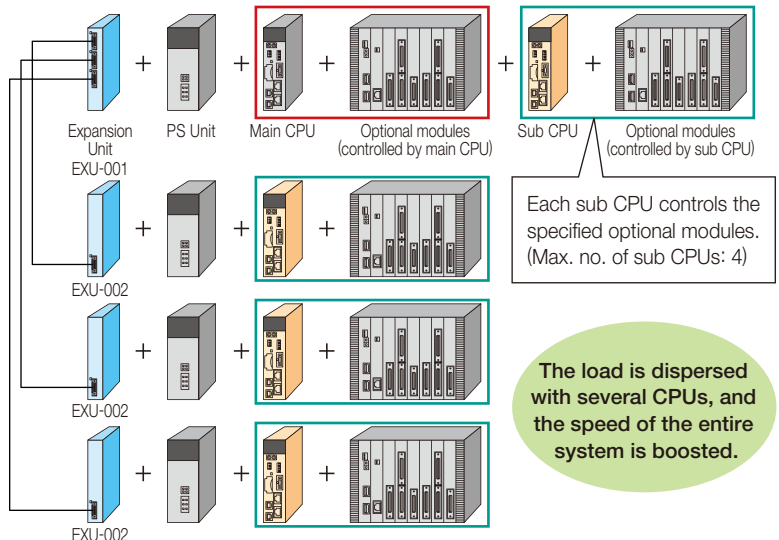

Sub CPU functions

Item	Sub CPU function
Connection method	MP3000 bus connection
Max. number of CPUs	5 CPUs (1 main CPU + 4 sub CPUs)
Data update cycle between CPUs	125 μ s, 250 μ s, ...32 ms
Max. CPU interface register size	Input: 2048 W Output: 2048 W
Servo connection for sub CPUs	For the servo connections on the sub-CPU side, 32 axes can be connected with the built-in SVC.

High Speeds and High-level Performance

MECHATROLINK-III Provided as a Standard Option

High-speed, multi-axis system configurations assembled with ease. Optimal control over complex systems by switching control modes while on-line.

MECHATROLINK-III


Fastest motion network in the industry

Fastest transmission cycle: 125 μ s (4 stations)

The MECHATROLINK-III motion network, which is among the fastest in the industry, is provided with the main unit CPU of the MP3200 as a standard option. The smoother motion control results in higher levels of precision.


MECHATROLINK-III		
Transmission Speed	Transmission Cycles (Number of Connected Stations)	
100 Mbps	125 μ s (4 stations)	500 μ s (14 stations)
	250 μ s (8 stations)	1.0ms (16 stations)*

*: The maximum number of stations, including I/O, is 21.

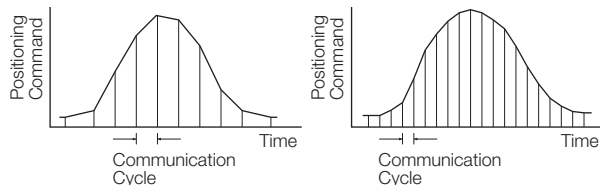


Control of 32 axes; systems expansion at no additional cost

The MP3200 can control large-scale systems with 32 servo-drive axes for a maximum of 42 stations per circuit. If a system is to be expanded, this makes it possible to minimize the additional cost of the options and construct a flexible system.

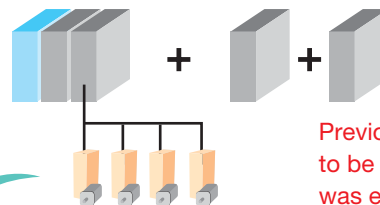

Previously, modules had to be added when a system was expanded.

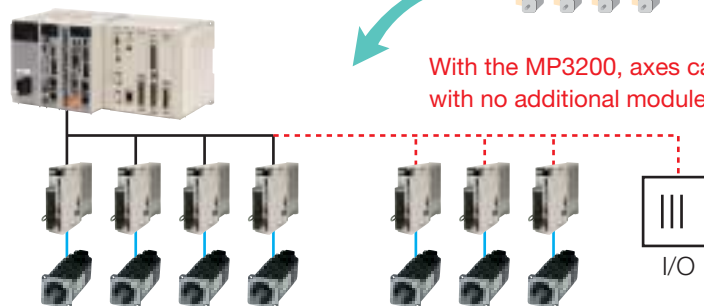

With the MP3200, axes can be added with no additional modules.


42 stations max. (Number of servo axes are 32 axes max.)

All-in-one four control modes

Every aspect of control from simple to complex operations can be achieved using one CPU without adding optional modules for each kind of control.

Synchronous Phase Control


Speed control with position compensation (electronic shaft) or position control with 100% speed feed forward (electronic cam). Multi-axis servomotors can be controlled synchronously.



0.3 mm dia. mechanical pencil lead does not break.


Torque Control

Generates a constant torque, regardless of speed.




Position Control

Advances to the target position, and stops or holds.




Speed Control

Turns the motor at the specified speed, with user-defined acceleration/deceleration slopes.




Switch between any of the modes while on-line

In addition to the position, speed and torque modes of control that are required for controlling a system, the MP3200 also features the synchronous phase control mode for which a high control performance is required, and switching between these four modes can be readily accomplished while on-line.

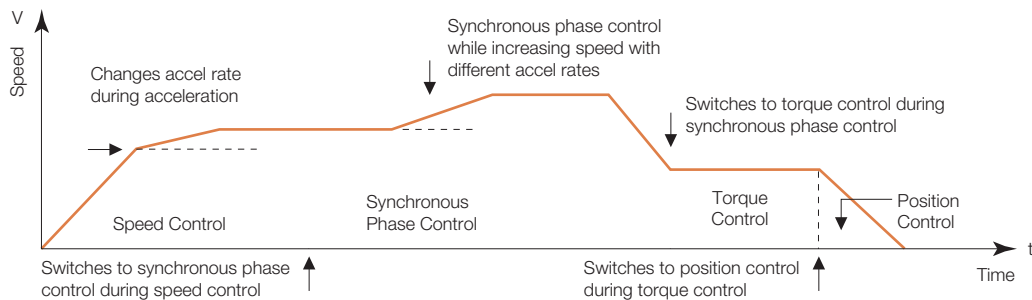


●Packaging machines

Switching from position control to synchronous control allows cutting, sealing and other such operations.

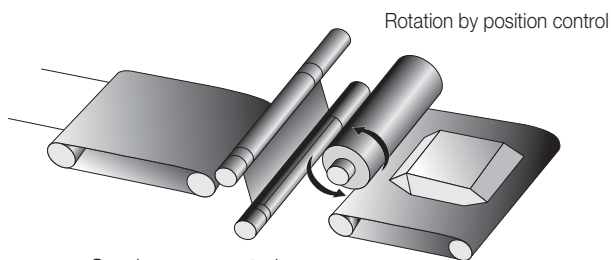

●Injection molding machines

Switching from position control to torque control can be executed without deceleration.

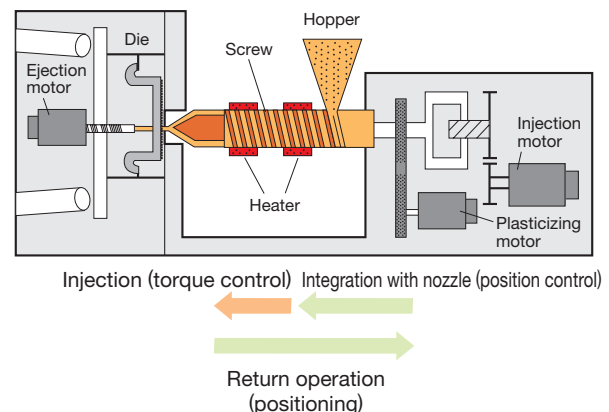

Improved Maintainability

Enhanced Usability and Traceability

Large volumes of data handled with ease. Effective use of function for data logging and file transfers.



Logging Data

●USB memory device

The following table lists the USB memory device recommended by and available from Yaskawa.

Model	Spec.	Manufacturer
SFU24096D1BP1TO-C-QT-111-CAP	4GB USB memory	Swissbit Japan Inc.




File Transfer



Easy loading and saving of project files on-site

USB memory device


Operations can be performed using the DIP switches on the CPU unit body. Even in places where a PC cannot be brought in, you can update the versions of the equipment and back up the data on-site with ease.

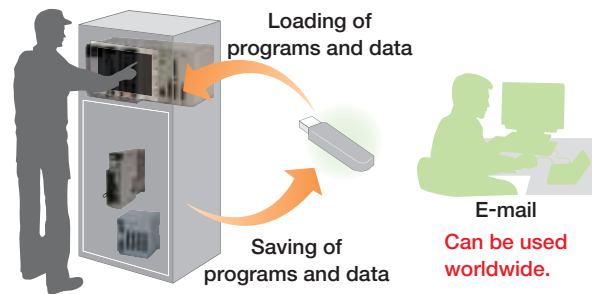

Reading and writing large volumes of register data

USB memory device


Import and export register data with new ladder program instructions. Even large volumes of data can be handled with ease.

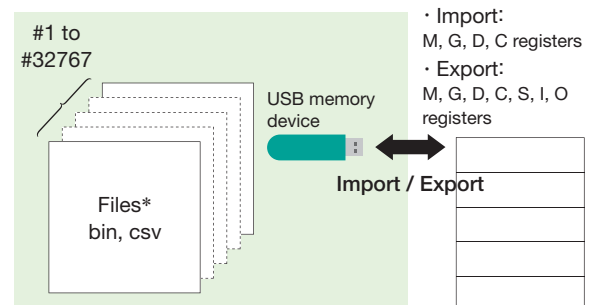

Save system's operation statuses onto internal RAM or USB memory device

Logging function

The logging function allows the system's operation statuses (logging data) to be saved in the USB memory device connected to the CPU or in the RAM inside the CPU unit. Either the binary or CSV format can be selected for the data to be saved.

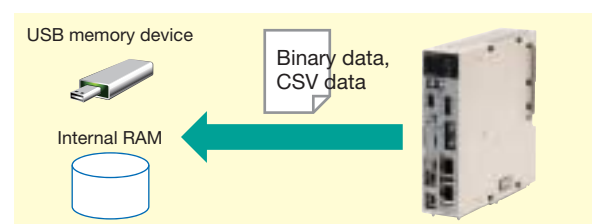


Recognize and note every single data change

Logging function

Data logging is possible at the timing that is synchronized with the scanning, so even the smallest data changes not normally recognized can now be caught.

— Scanning time setting
— Normal controller setting (slow)


High-speed logging in sync with the scanning allows the kind of trouble that was missed before to be discovered and the causes of the trouble to be cleared up with a high degree of accuracy.

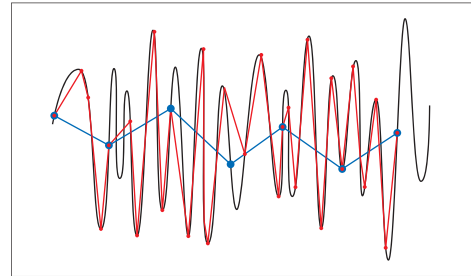

Setting of conditions also possible

Logging function

Settings can be selected for the conditions under which the logs are output. The logging data is saved only if the values of the specified registers fail to meet the output conditions. This enables a rapid response when trouble occurs.

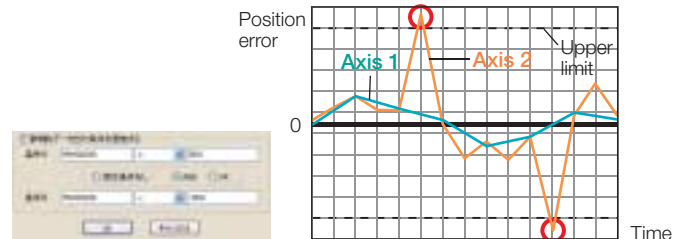


Easy access from remote host systems

File transfer function

By using the file transfer function file transfer function (FTP server function), the logging data or register data in the CPU unit's internal RAM or the USB memory device can be downloaded from a remote location to a host system*.


*: System provided with an FTP client function

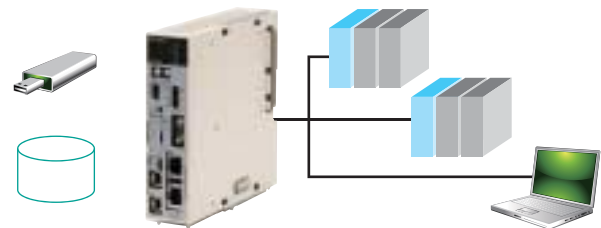

Improved traceability with large accumulation of data

File transfer function

By transferring the system's operation data (logging data and register data) at the specified synchronization, large volumes of operation data can be acquired with no fear that the data may be unexpectedly damaged. As a result, the traceability at the production site is vastly improved.

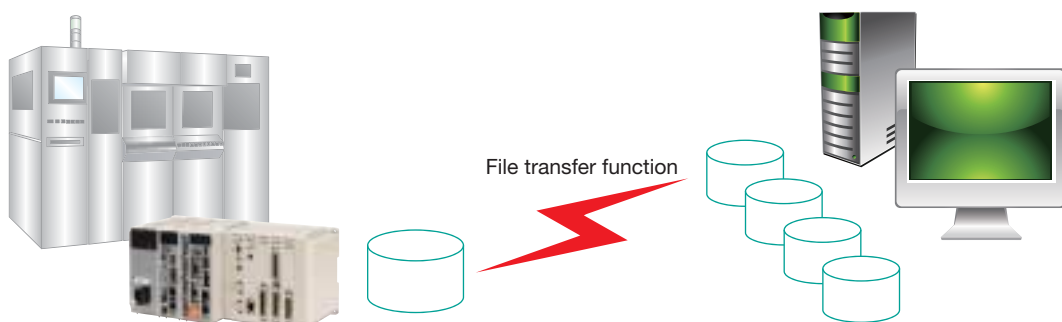

Flexible System Construction

Effective Use of a Wide Variety of Modules and Previously Available Programs

Easy access to varied network connections and easy use of resources.
Design systems without restrictions!

OPEN NETWORK

Controller Network



Controller Network

Supported open networks

- FL-net
- EtherNet/IP
- Ethernet
- RS-232C, RS-422/485


Motion Network

Supported open networks

- MECHATROLINK-II
- MECHATROLINK-III



Motion Network

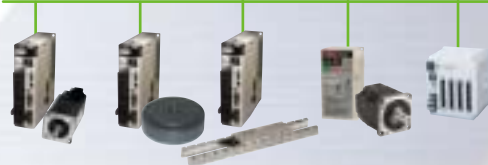

Field Network

Field Network

Supported open networks

- DeviceNet
- PROFIBUS
- PROFINET
- CC-LINK
- CompoNet
- EtherCAT

Supported closed networks

- MP-LINK
(Real-time network developed by Yaskawa)
- A-net/A-Link
(By Algo System Co., Ltd.)
- CUnet
(By Algo System Co., Ltd.)
- AnyWire-DB
(By Anywire Corporation)

All MP2000 optional modules supported

Three models of base units are available, a three-slot model, a five-slot model, and an eight-slot model.

Approximately 30 types of MP2000 optional modules can be connected for a high degree of expandability.



Option Modules for MP3000 and MP2000 series

❖ Motion Modules



Connects to the SERVOPACK for motion control. Various MECHATROLINK slaves can be connected to the SVC-01 or SVB-01 module.

Name	Model	Description
SVC-01	JAPMC-MC2320-E	MECHATROLINK-III × 1 channel
SVB-01	JAPMC-MC2310-E	MECHATROLINK-II × 1 channel
SVA-01	JAPMC-MC2300-E	Analog-output 2-axis servo control
PO-01	JAPMC-PL2310-E	Pulse-output 4-axis servo control

Note: One CPU can control up to 16 modules.

❖ Expansion Interface Module

Used to connect the Expansion Rack (MP2200 Base Units MBU-01/-02/-03) to add the option modules.

Name	Model	Description
EXIOIF	JAPMC-EX2200-E	Expansion Interface

Note: Use the EXU-001 and -002 Units when using rack expansion with sub-CPU.

❖ I/O Modules



Provides digital or analog I/O interface.

Name	Model	Description
LIO-01	JAPMC-IO2300-E	Digital input: 16 points (sink output mode) Digital output: 16 points (sink output mode) Pulse input: 1 point
LIO-02	JAPMC-IO2301-E	Digital input: 16 points (source output mode) Digital output: 16 points (source output mode) Pulse input: 1 point
LIO-04	JAPMC-IO2303-E	Digital input: 32 points Digital output: 32 points (sink output mode)
LIO-05	JAPMC-IO2304-E	Digital input: 32 points Digital output: 32 points (source output mode)
LIO-06	JAPMC-IO2305-E	Digital input: 8 points Digital output: 8 points (sink output mode) Analog input: 1 channel Analog output: 1 channel Pulse counter: 1 channel
DO-01	JAPMC-DO2300-E	Digital output: 64 points (sink output mode)
AI-01	JAPMC-AN2300-E	Analog input: 8 channels
AO-01	JAPMC-AN2310-E	Analog output: 4 channels
CNTR-01	JAPMC-PL2300-E	Pulse-input counter

Note: One CPU can control unlimited number of modules.

❖ Communication Modules




Used to construct an open network. Modules with various types of interfaces are available.

Name	Model	Description
218IF-01	JAPMC-CM2300-E	Ethernet (10BASE-T) port × 1 RS-232C port × 1
218IF-02	JAPMC-CM2302-E	Ethernet (100BASE-TX) port × 1 RS-232C port × 1
217IF-01	JAPMC-CM2310-E	RS-232C port × 1 RS-422/485 port × 1
260IF-01	JAPMC-CM2320-E	DeviceNet port × 1 RS-232C port × 1
261IF-01	JAPMC-CM2330-E	PROFIBUS port × 1 RS-232C port × 1
262IF-01	JAPMC-CM2303-E	FL-net (100BASE-TX) port × 1 (10BASE-TX) port × 1
263IF-01	JAPMC-CM2304-E	EtherNet/IP (Scanner and adapter) port × 1
264IF-01	JAPMC-CM2305-E	Port for EtherCAT slave × 2 (1 circuit)
265IF-01	JAPMC-CM2390-E	CompoNet port × 1
215AIF-01	JAPMC-CM2360-E	MPLINK communication/ RS-232C
215AIF-01	JAPMC-CM2361-E	CP-215 communication/ RS-232C
266IF-01	JAPMC-CM2306-E	PROFINET master*
266IF-02	JAPMC-CM2307-E	PROFINET slave
269IF-01	JAPMC-CM2308-E	CC-Link IE Field Slave

*: Estimates are required before ordering this product.
Contact your Yaskawa representative for more information.
Note: One CPU can control up to 8 modules.
For RS-232C communications, 16 ports can be used.

MP2000 application programs usable without modifications

Compatibility with the MP2000 applications eliminates the need for re-design and paves the way to the effective use of software resources.

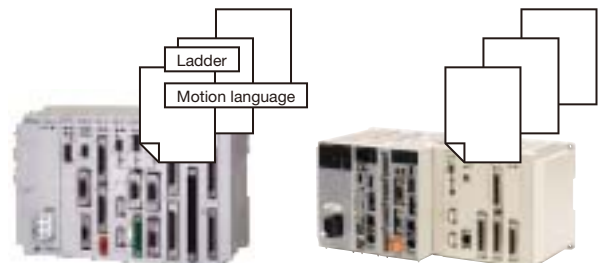

High-speed Processing

YVD-001: The Vision Unit that has Undergone an Exciting Evolution.

Absolutely no delays in motion and vision processing. Get the high-speed image processing you desire!

Simple programming with only one integrated environment for motion and vision engineering.


⇒ For details, see pages 22 and 23.



Note: Estimates are required before ordering this product. Contact your Yaskawa representative for more information.

Faster speeds and higher precision simple with system design


With a high-speed bus connection, motion processing and vision processing can now be executed with absolutely no communications delays. Your machine systems will deliver faster speeds and higher precision with ease.

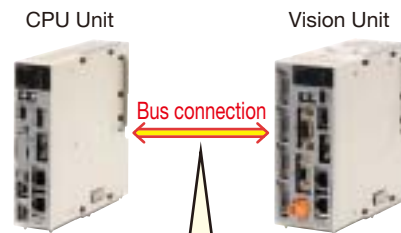

Connect the CPU Unit and the Vision Unit directly with the high-speed bus for simple system design.

Faster system throughput

Compared with the YV260, which was the MYVIS unit used previously, faster CPUs are used and a new image processing engine was implemented to reduce image processing time. Also, connecting the CPU unit with a high-speed bus has eliminated communications delays to achieve faster system throughput.

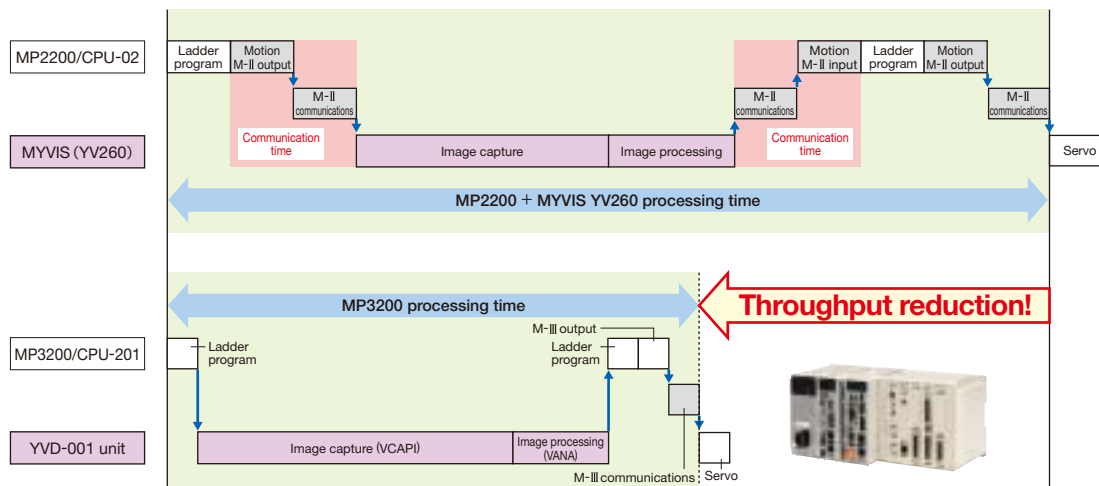


High-resolution digital cameras (5 megapixels)

- Precision in detecting a position has improved by four times when the same views are compared. (For example, precision increases for 1 μm to 0.25 μm .)
- Tiny objects that cannot be distinguished at 0.3-megapixels resolution can now be recognized.


- 5 megapixels allows a large object image to be captured in one view where it previously required multiple views at 0.3 megapixels.
- Takt time can be shortened by reducing machine movements.
- The workpiece transfer mechanism and camera shifting mechanism can be eliminated.
- Accuracy in workpiece transfers is less important. (Even a symbol that could not be in the view of a camera at 0.3 megapixels can now be in the view.)

High precision

One part of captured image enlarged.

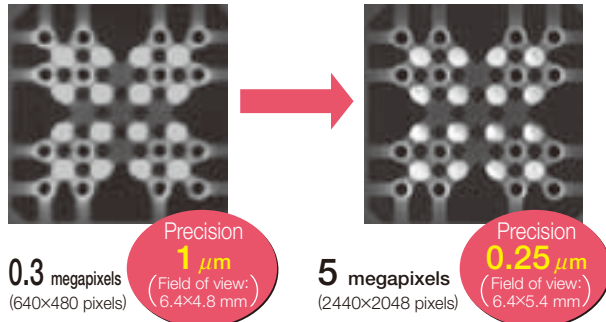


Expanded view

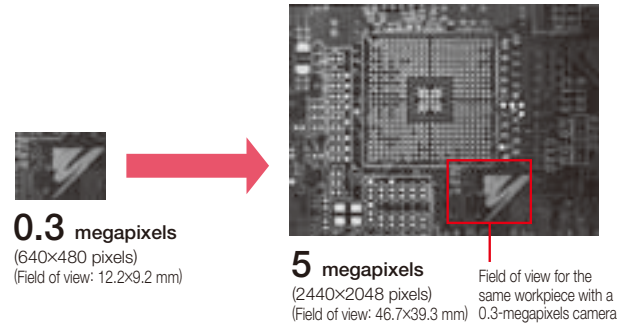

Combination of Cameras with Different Image Formats Possible

- 4 digital cameras can be connected with camera link.
- Cameras with different image formats can be used in combination, depending on applications and equipment.
- The same external trigger can be used for all cameras, or a different trigger can be used for each.

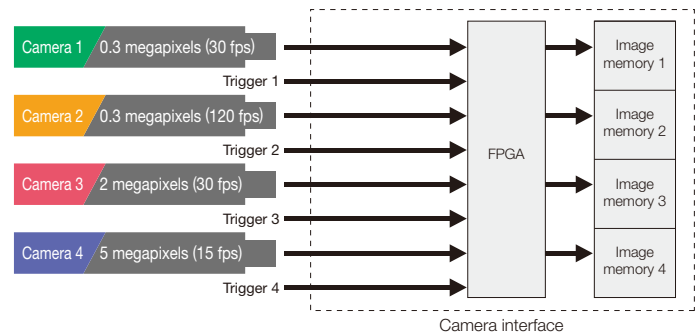

Camera List

- Black-and-White Camera and Color Camera*1 with Digital Interface

Manufacturer	Product	Resolution	Frame Rate	CCD Size
Sony Corporation	XCL-5005	2448×2048	15 fps	2/3
	XCL-C30*2	640×480	130 fps	1/3
	XCL-C280*2	1920×1440	(2ch) 26 fps, (1ch) 15 fps	1/1.8
TOSHIBA TELI CORPORATION	CSCV90BC3	640×480	90 fps	1/3
	CSCX30BC3	1024×768	30 fps	1/3
	CSCS20BC2	1360×1024	20 fps	1/2
	CSCU15BC18	1600×1200	15 fps	1/1.8
	CSCU30BC18	1600×1200	30 fps	1/1.8
	CSCU30CC18	1600×1200	30 fps	1/1.8
Hitachi Kokusai Electric, Inc.	KP-F30PCL	640×480	60 fps	1/3
	KP-F31PCL	640×480	120 fps	1/3
	KP-F80PCL	1024×768	36 fps	1/3
	KP-F200PCL	1600×1200	15 fps	1/1.8
	KP-F230PCL	1600×1200	30 fps	1/1.8
	KP-FD140PCL	1280×1024	30 fps	1/2
KP-FD202PCL	1600×1200	30 fps	1/1.8	

- Black-and-White Camera with Analog Interface

Manufacturer	Product	Resolution	Frame Rate	CCD Size
Sony Corporation	XC-ST70/50/30	640×480	30 fps	2/3, 1/2, 1/3
	XC-ES50/30			1/2, 1/3
	XC-56	640×480	30 fps	1/3
	XC-HR50/57	640×480	60 fps	1/3, 1/2
	XC-HR70	1024×768	30 fps	1/3
TOSHIBA TELI CORPORATION	XC-HR90	1280×960	15 fps	1/3
	CS8630i	640×480	30 fps	1/3
	CS8560BD, CS8570D	640×480	60 fps	1/3, 1/2

*1: Product with green shading.

*2: Available for software version 1.40 or later.

Note: Update the camera file to use additional camera types.

Enables High-Speed Image Processing

Features high-speed filtering and high-precision template matching functions

Pre-process Filtering with ASIC

Image inputs are pre-processed at high-speeds by using FPGA. Images can be improved at high-speeds before image processing such as pattern matching. (The YVD unit can process a 300,000-pixel image in 2 to 3 ms.) Pre-processing improves unclear images and images with noise, enabling easy recognition of symbols.

Inter-image operations



Addition, average, subtraction, difference

Convolution filter (5×5)

Parameters can be set according to purpose (such as smoothing, suppressing noise, and emphasizing edges).

Dilation and erosion

Dilation: A function to fill gaps, such as missing part from an image of holes or breaks in lines.
Erosion: A function to eliminate noise such as isolated points.

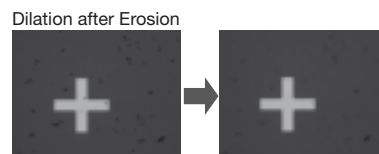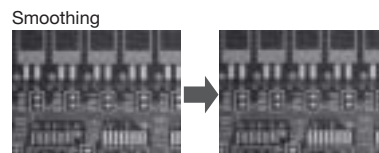

Gray Scale Pattern Matching Function (Normalized Correlation)

Our proprietary hardware and search algorithm enable high-speed, high-precision position detection. Multiple position detection is the default setting of the YVD unit.

▶ The photo on the right shows the detection of the position of an alignment mark on a glass substrate.

- Search area: 640×480 (Full field of view)
- Template size: 110×110 pixels
- Search time: 3.0 ms (When subpixel mode is OFF)
4.4 ms (When subpixel mode is ON)



Binary Blob Analysis Function

Our proprietary ASIC enables high-speed processing by generating binary data.


▶ The photo on the right shows an example of the blob analysis results.

- Analysis area: 640×480 (Full field of view)
- Number of blobs: 5
- Processing time: 1.2 ms




Subpixel Detection Function

The YVD unit has proven detection precision of between 1/10 and 1/5 pixels when used in manufacturing lines.

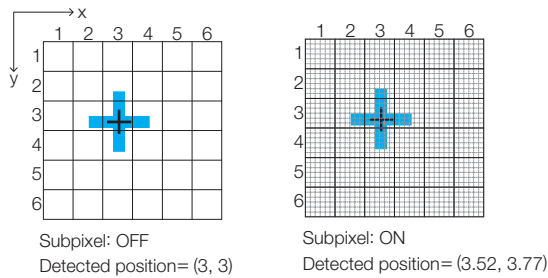


Test Results of YVD unit Subpixel Detection Mode

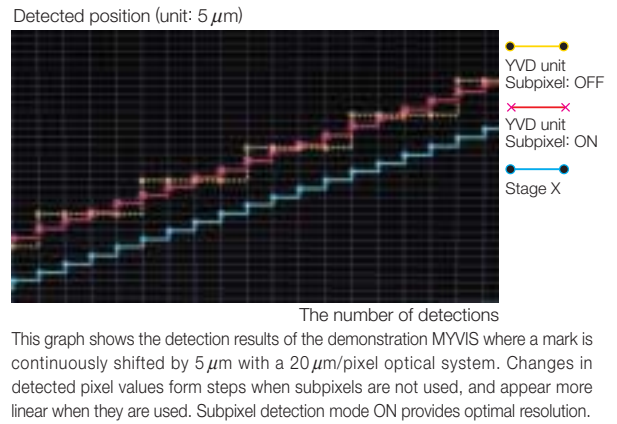


Improved Position Detection with Normalized Correlation Method

Accurate positioning is possible even when the appearance of a mark changes.

The following examples show incomplete marks. Even though a normalized correlation score deteriorates as the missing part of the mark gets larger, the detected positions do not change.

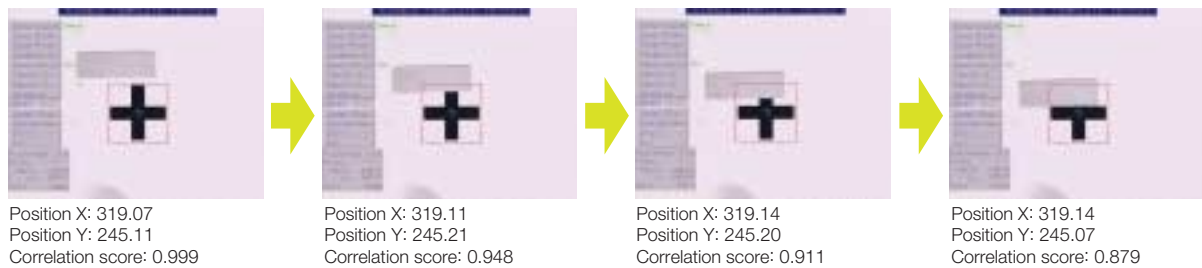

As long as most dots are located near the straight line in a scatter diagram, the effect of some dots apart from the line will be insignificant.



Template Mask

The template mask can be set to accurately detect marks in which the appearance varies. The photo on the right shows a template mask being used on a ring mark. Even though a part of the mark is covered, the mark can still be detected correctly.




Detection of Positioning Marks of Any Shape

When there is no mark, you can substitute distinctive forms such as circuit patterns for the mark.



Pipeline Image Input

The YVD unit can input and process images simultaneously while alternatively using plane 1 and plane 2 of the image memory. As no waiting time is required for image capture, this enables high-speed processing with a cycle time almost equal to the time required for image capture.

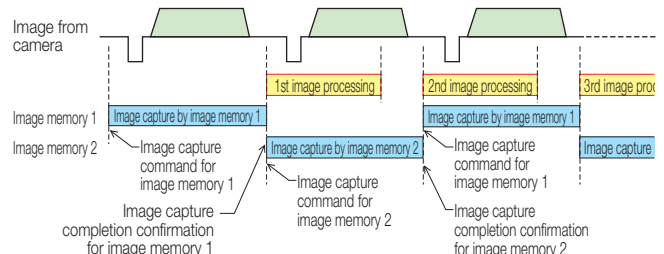


Get Precise Alignment with a Single Image Capture

Achieves the target precision with a single correction.



Positioning with No Retries Required (Instant Alignment)

The YVD unit alignment program takes overall machine motions into account, and can recognize the current value of the servo axis at the alignment stage. High-precision correction for positioning can be done by a one-step process for image recognition and correction. This one-step-process uses a calibration based on the current position of the servo axis and the mechanical coordinate system plus calculated corrections in reference to the center of rotation.

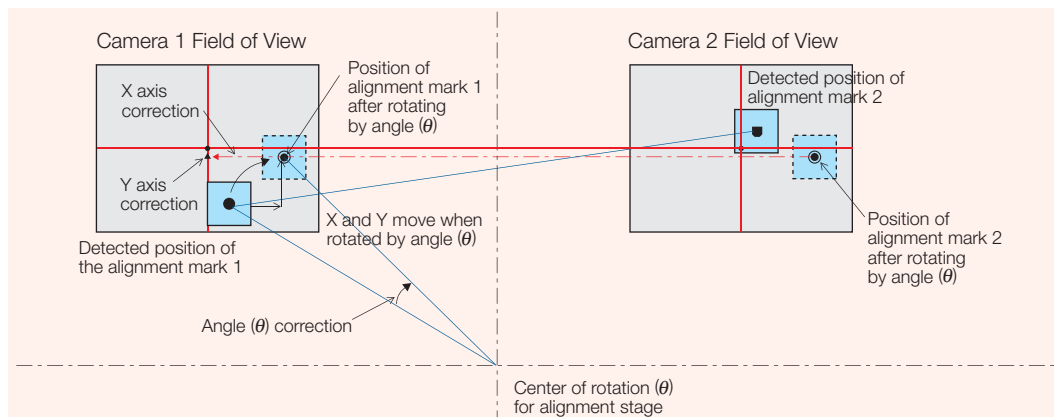


Basic Positioning Calculation

As shown in the figure above, the two alignment mark coordinates are used to perform the calculation in units of servo axis movement.

The inclination from the center of the θ axis is corrected to move the mark to the reference point (target position).

Example:

In the figure at right, the left mark is being centered in the search area of the left-side camera (camera 1). This enables various combinations of processing, including processing center position of the marks and processing with four cameras.

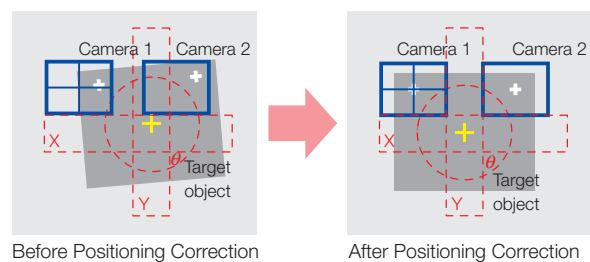


Calibration by Pixel Size

The calibration mark is moved by moving the stage to obtain the pixel size and the angle of the surface on which the camera is mounted against the axis of the stage.


Calibration by Center of Rotation

The calibration mark is moved by the rotation of the stage, and the position of rotational center is calculated from two detected positions.

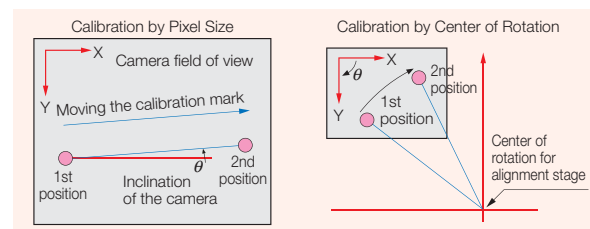

Great Improvement in Correction Values

The photos on the right show an alignment done by the demonstration YVD unit installed at the Yaskawa showroom. Even though the pixel size is about $20 \mu\text{m}$, position has been corrected to the 2 to $3 \mu\text{m}$ level with a single recognition and correction. If more precision is required, accuracy can be improved to the $1 \mu\text{m}$ level by repeating the correction.

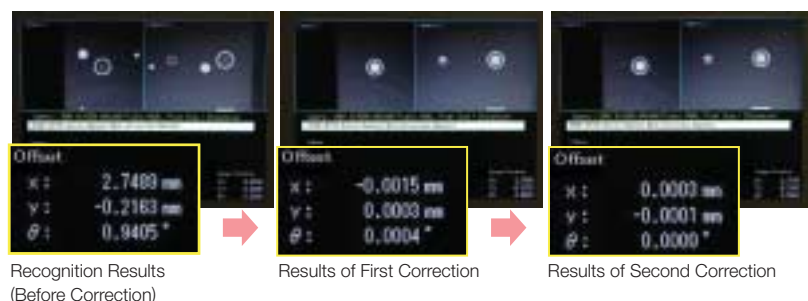


No Need to Stop for the Camera


Achieves reduced takt time with non-stop alignment.

Non-stop System

Takt time is reduced because there is no need to pause the object in front of the camera to calculate chip misalignment.

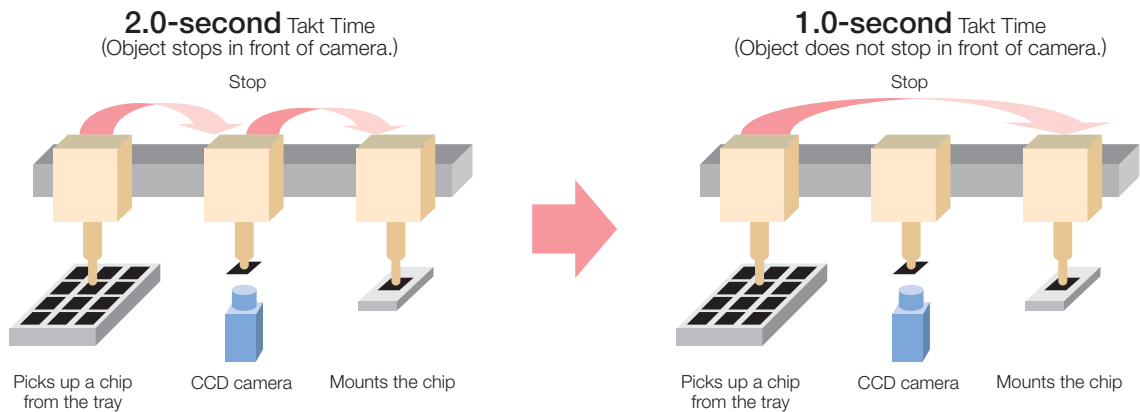

System Configuration

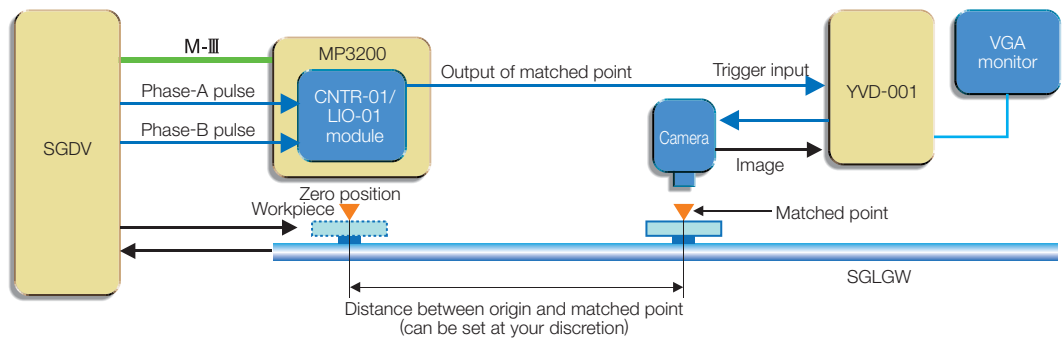

System Outline

If an external trigger signal is input, the YVD unit outputs a shutter trigger pulse to the camera. The image is captured immediately after it has been exposed.

When using a Yaskawa MP controller with an LIO-01 module, no sensor is needed for the external trigger, and you can select any position as the destination for the trigger signal.

Equipment	MP3200 machine controller, Σ -V series servomotor, YVD-001 machine vision system, super luminosity LED light illumination, KP-F31PCL (quad-speed progressive-scan digital camera)
Specifications	Move speed: 1,000 mm/s; camera shutter speed: 1/16,000 s; field of view: 20 mm
Image processing time	Image capture (8.3 ms) + image processing (2 ms) = 10.3 ms
Positioning correction accuracy	3 to 6 μ m (When pixel size is 30 μ m)
Time chart	<p>A timing chart for non-stop alignment</p>


System Integrated Engineering Tool MPE720 Ver.7



Consolidated control over the entire system
Multiple axes can be set up and adjusted concurrently.

**ALL-IN-ONE
ENGINEERING**


Each development process is carried out with one tool

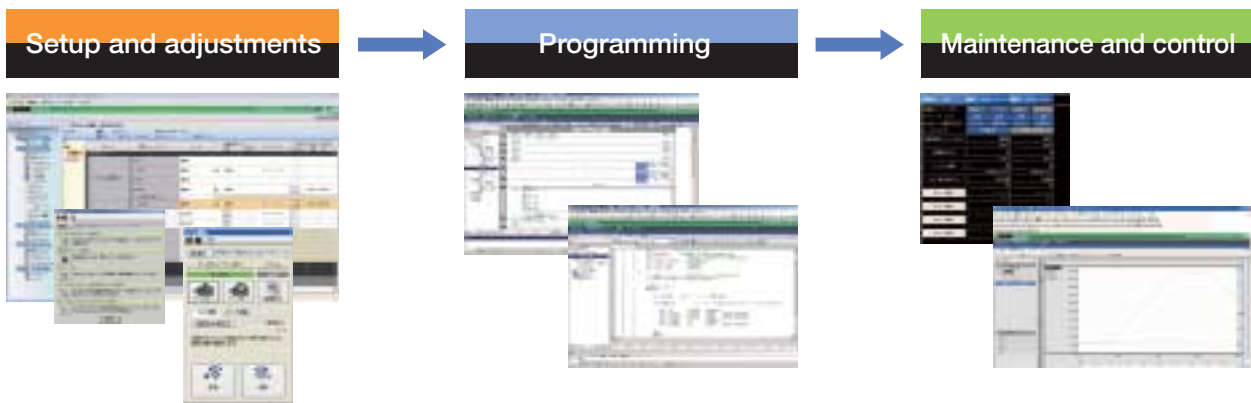

All settings and monitoring of the system executed together

This executes all the system settings, parameter settings, and monitoring of all the units. All the information can be controlled together, making the entire system "visible."

MC-Configurator display

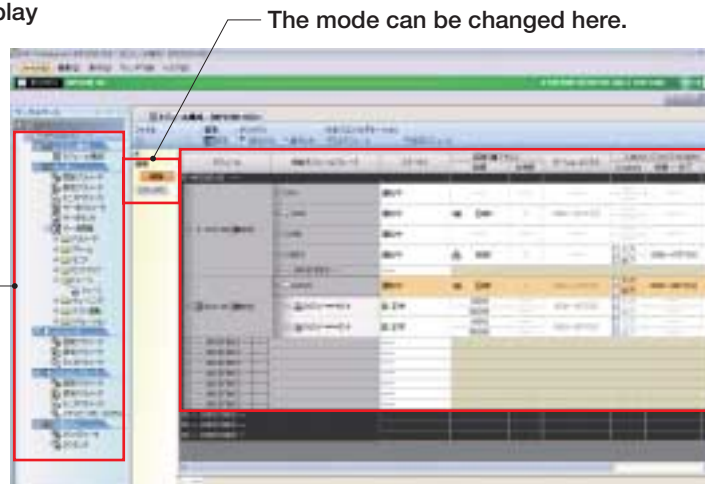

The mode can be changed here.

System configuration set automatically


Using MC-Configurator, the setup of an entire system can be executed automatically. The connected units and register allocation information, and other design information of the entire system can be checked out here.

Simultaneous displays and editings for more than one axis

The parameter settings and monitoring of the slave units are performed here.

Efficiency improved by choosing the programming method that works best for the user

Ladder programming

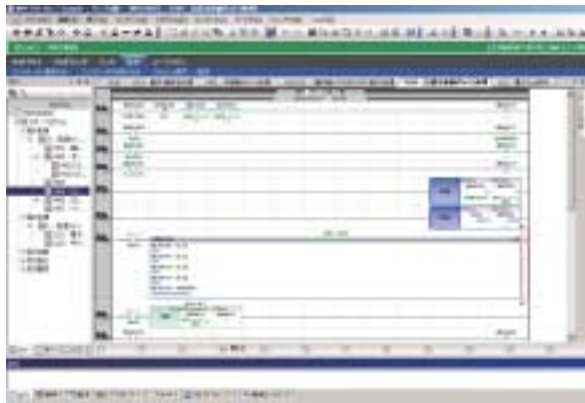


Features

- A new user interface (UI) enables operations to be undertaken easily by anybody.
- All types of control including position, speed, torque, and phase control are supported.
- Arithmetic expressions in the ladders have been made even simpler by boosting the EXPRESSION instructions.

This system is recommended for:

- Users who are using a PLC

Motion programming

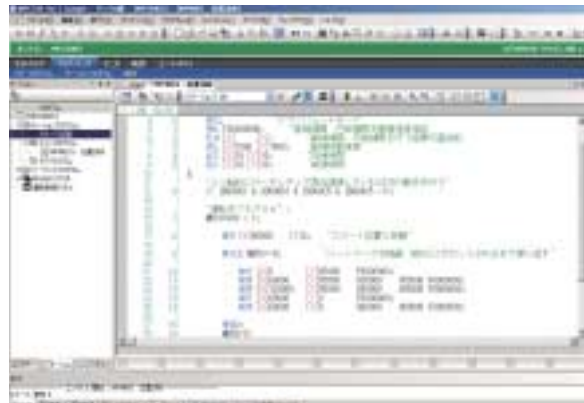

Features

- Positioning and interpolation instructions can be described using single instructions.
- Programs can be very easily edited using expressions in a text format.
- New variable programming can provide PC-like programming.

This system is recommended for:


- Users of PC based devices and in-house fabricated boards (C language, BASIC language)

Adjustment work supported by a variety of adjustment functions


The servo adjustment functions are integrated in MC-Configurator. Previously, the setup and adjustments had to be done for each and every axis, whereas the adjustment work can now be accomplished on multiple windows. This dramatically reduces the adjustment time and enhances efficiency.




Executed from
MC-Configurator

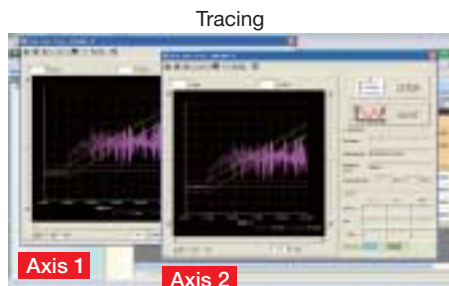


Tracing

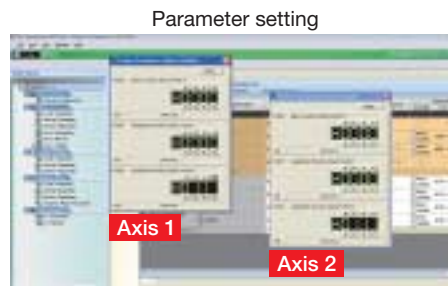

Parameter setting

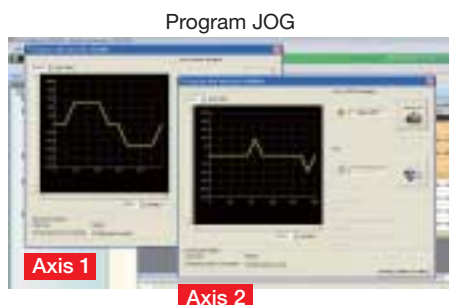


Program JOG

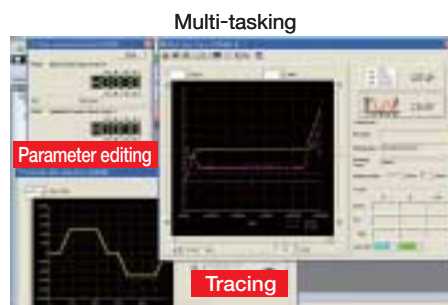

Multi-tasking

Both motion and vision engineered in the same environment

No longer is it necessary to add a dedicated compiler and debugger for the vision system so that programs can now be developed with no additional investment.

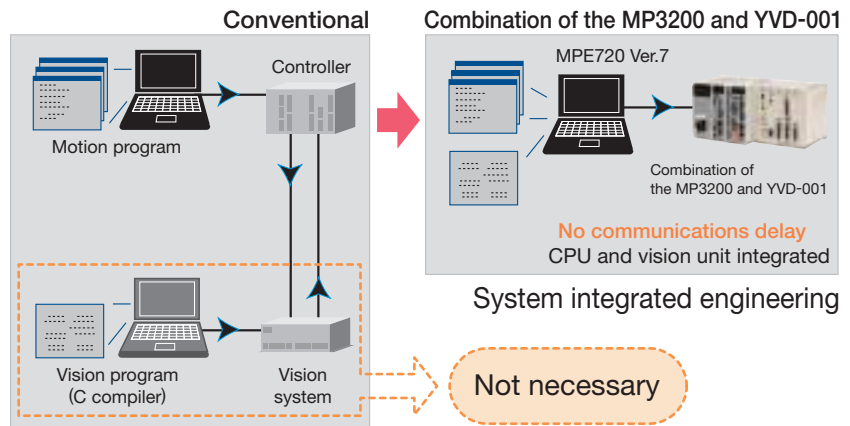

Executable instructions now integrated into 4 basic instructions

More than 300 instructions were previously required, but these have now been integrated into 4 basic instructions. These basic instructions can be used extensively from simple to complex image processing.

4 basic instructions

- VCAP: Image capture
- VFIL: Pre-processing (filtering)
- VANA: Image analysis
- VRES: Image analysis result acquisition

Easy programming with Instruction Input Assistance

Programming can now be done with the Instruction Input Assistance function. The parameters that need to be set are displayed in dialog boxes so programming proceeds smoothly without referring to the manual.

Instruction input assistance

- Select the instructions.
- Set the parameters.
- Click [Insert].


Programming is now complete!

Parameter	Unit	Value	Description
Image No.	Image No.	1	Image No.
Window No.	Window No.	1	Window No.
Template No.	Template No.	1	Template No.
Start mode	Start mode	1	Start mode
Number of reported results	Number of reported results	1	Number of reported results
Start result mode	Start result mode	1	Start result mode
Data list No. for saving results	Data list No. for saving results	1	Data list No. for saving results
Data list No. for saving detailed comparison	Data list No. for saving detailed comparison	1	Data list No. for saving detailed comparison

Vision Unit settings and monitoring all together

■ Camera selection and parameter controls enabled

· As with the drive units, the Vision Unit settings and control can easily be executed on the MC-Configurator window.

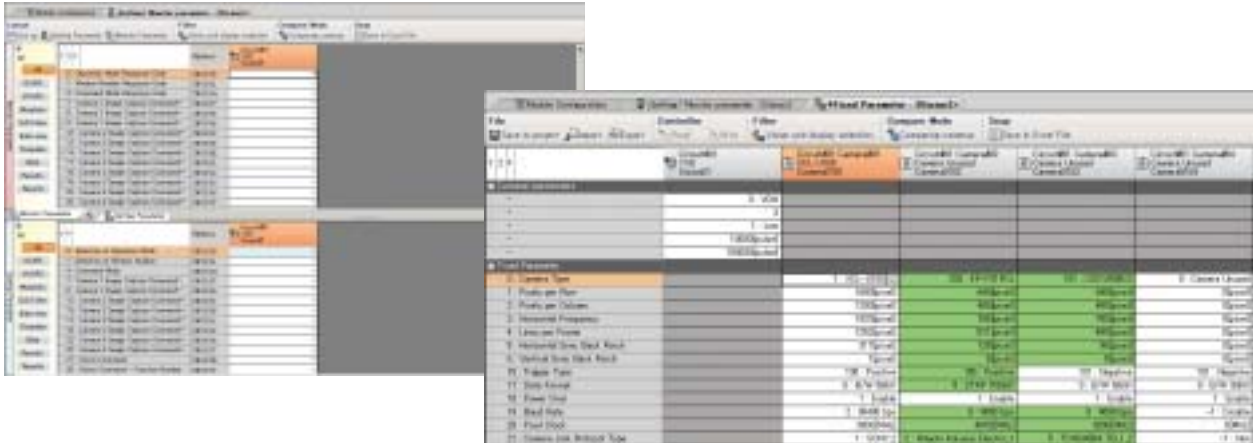

■ One-step execution for debugging and monitoring

- Debugging operations such as program pauses, breakpoint settings, and one-step execution
- View the register status on the register list.



Debugging Operation

Register List


Connect an MP3200 Controller to a display monitor to view information about the servo axes or the status of your motion control system without a PC. Visualize your system with MP3200 Controller.

Programmable Display Unit Pro-face GP4000 Series Made by Schneider Electric Japan Holdings Ltd.

Machine controllers, servo drives, and inverters can be adjusted and maintained with this display unit. You can easily check system startup and maintenance status, pinpoint the causes when an error occurs, and update or back up application programs with the display on-site without using a computer.


Features

- 1 Touchscreen to easily confirm the status of the MP3200 Controller
- 2 Wide variety of windows to monitor all axes and the status of MP3200 Controller
- 3 Register list to easily monitor and edit registers
- 4 Application programs can be updated or backed up by using the program transfer function, without using a computer.
- 5 Free samples of windows for various functions can be downloaded. No special device is required to set up screens.

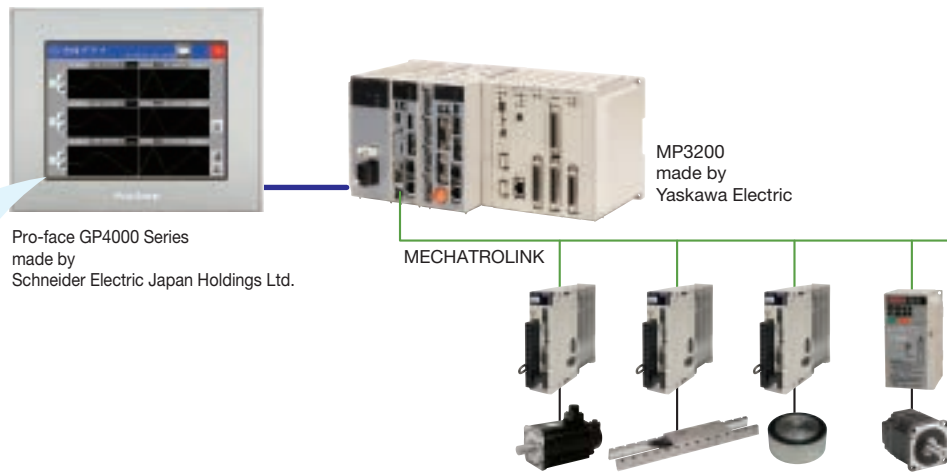


The cockpit parts can be downloaded from the homepage of Schneider Electric Japan Holdings Ltd.: <http://www.pro-face.com/otasuke/>

Note: For the English-language displays, contact the Schneider Electric Japan Holdings Ltd.

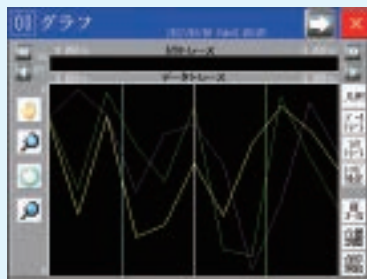

▲ Data tracing: Waveform details

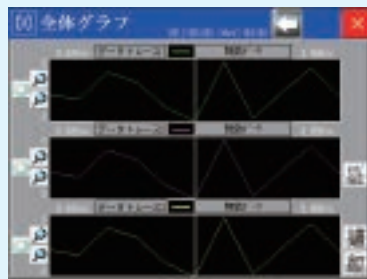


▲ Data tracing: Waveform division



▲ Data tracing: Settings



▲ Troubleshooting

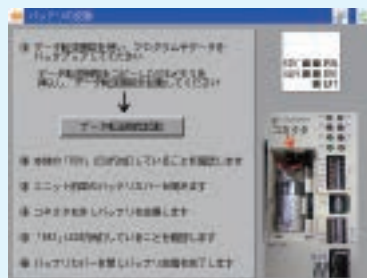


▲ Battery replacement




▲ Error code check

Program Transfer with an External Memory Unit!

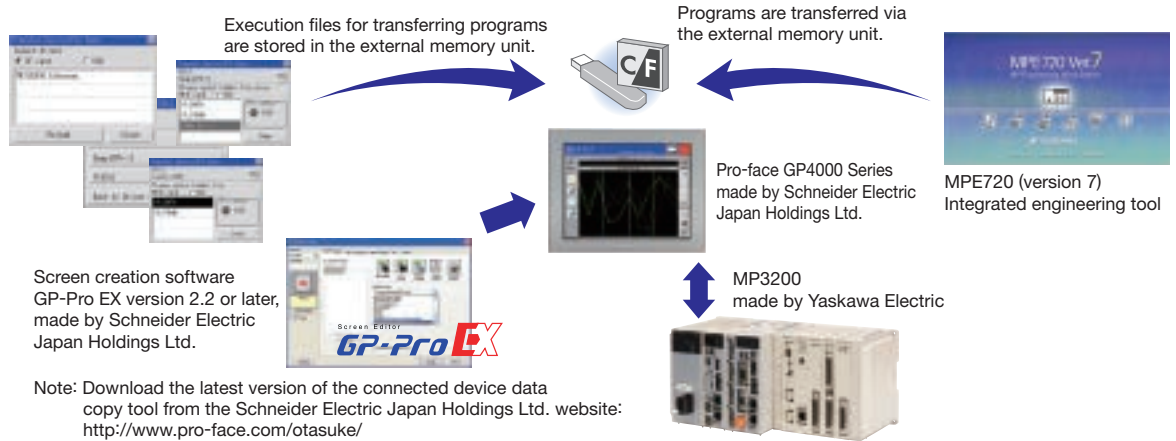

Adjustment and Maintenance of Servo Drives and Inverters Right on the Touch Panel!

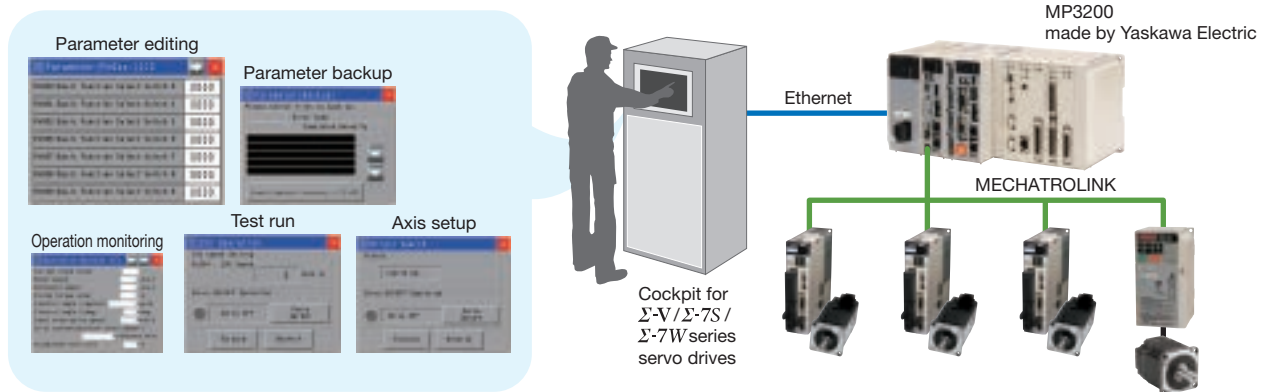

Other Manufacturer Products **MECHATROLINK-compliant Devices**

Partners of the MECHATROLINK Members' Association manufacture the following MECHATROLINK-compliant devices. These devices can be connected to the MECHATROLINK connector on MP3200 Controller for a bus with reduced wiring.

MECHATROLINK-I- and -II-compliant Remote I/O
Model: R7ML series, R7K4FML, R7K4DML, R7G4HML

Made by M-System Co., Ltd.

- Can handle 16 to 32 discrete I/O signals, 4 analog input, and 2 analog output signals.
- Analog and discrete signals can be mixed.
- 3M screw terminals (2-piece configuration) are used for power supply and I/O terminal blocks. Saves space because relay terminal is not required.
- R7K4DML-B used with e-CON connectors for I/O connection is also available.



HLS (High-speed Link System) Master Module
Model: MPHLS-01

Made by M-System Co., Ltd.

- Master module that can be used with MP2200, MP2300, and MP3300 series machine controllers.
- Wiring for discrete I/Os and analog I/Os can be reduced with M-System's rich product lineup of remote I/O modules (R7HL and R7F4DH series) that can be connected to the HLS master module.



MECHATROLINK-III-compliant Remote I/O
Model: R7G4FML3, R7G4HML3, R7F4HML3, R7K4FML3, R7K4JML3

Made by M-System Co., Ltd.

- Can handle 16 to 64 discrete I/O signals and 4 analog output signals (max.).
- Equipped with discrete I/O, DC input and output, temperature input, and rotary encoder input.
- High-speed A/D conversion unit (conversion speed: 200 μ s) and Strain Gauge Input Module are available.
- 3M screw terminals (2-piece configuration) are used for power supply and I/O terminal blocks. Saves space because relay terminal is not required.
- R7K4JML3-E used with spring clamp connectors for I/O connection and R7F4HML3-D used with MIL connectors are also available.



MECHATROLINK Bit-type Distributed I/O Terminal


Model: AB023-M1

Made by Anywire Corporation

The MECHATROLINK Bit-type distributed I/O terminal contributes to the reduction of wiring required for drive systems that use MECHATROLINK-I/II.

Introduction of this new I/O terminal into a MECHATROLINK open-network system significantly reduces the total costs and increases system reliability, because the MECHATROLINK I/O terminal can be used with any transmission media such as robot cables and slip rings.

The Bitty series of I/O terminals from AnyWire can be connected to increase the flexibility in transmissions by supporting the connection of cables for signals from sensors and actuators in the system. Possible to expand number of I/O points to 432 by connecting I/Os with a bus that reduces the amount of wiring required.

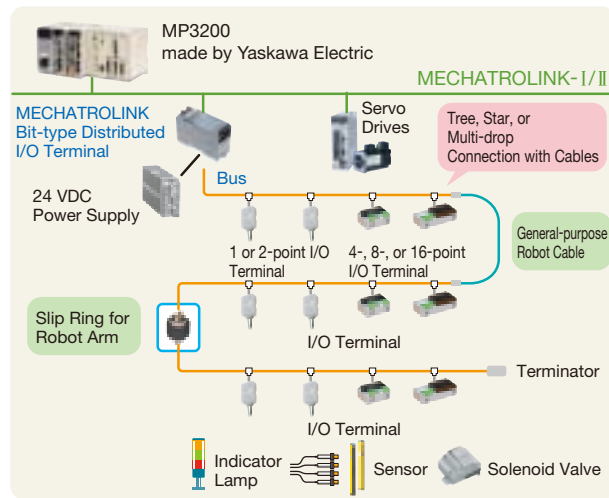

Note: For more details on AFMP-01 module and AB023-M1 I/O terminal, contact Anywire Corporation or visit its web site, <http://www.anywire.jp>.

AZ Series Multi-axis Driver for Motors Equipped with Mechanical Absolute Encoders

Model: AZD□A-KM3

Made by Oriental Motor Co., Ltd.

- This α STEP AZ series driver, for use with motors equipped with battery-free mechanical absolute encoders, now supports MECHATROLINK-III communications.
- Because an external sensor is not required, you can save on wiring and reduce maintenance.
- The motor will not miss steps, even under rapid load fluctuations or rapid acceleration, and highly responsive positioning is possible without tuning and hunting.
- AZ series DC power supply input motors and actuators can be connected to this multi-axis driver for two to four axes.

Note: For more information on AZD□A-KM3 stepping motors, contact Oriental Motor Co., Ltd. or visit its website at <http://www.orientalmotor.com>.

Module-type Digital Temperature Controller

Model: SRZ

Communications converter module COM-MY
Temperature control module Z-TIO
Digital I/O module Z-DIO

Made by RKC Instrument Inc.

- Easily construct a multi-channel temperature control system by connecting the MECHATROLINK-compliant communications converter module to the temperature control modules.
- A single temperature control module can control temperatures of four points or two points. Also, 16 modules can be connected for temperature control of maximum 64 points.
- Digital I/O modules to output temperature alarms and to switch operation modes by using contact signals can also be connected.

Note: For more information on SRZ temperature controllers, contact RKC Instrument Inc. or visit its website at <http://www.rkcinst.co.jp>.



K1G Series High-accuracy Position Sensors

Model: MECHATROLINK-III-compatible K1G-C04M

Made by Azbil Corporation

- See what you previously couldn't
Minute variations not visible with conventional sensors can now be reliably detected.
- Easily mounts anywhere
Compact dimensions are achieved by slim sensor head design.
- Less wasted time
Comes with a full range of functions to help cut job time for design, installation, and maintenance.
- Support for MECHATROLINK-III also opens up a host of new applications and advantages.

Note: For more information on K1G-C04M controllers, contact Azbil Corporation or visit its website at <http://www.compoclub.com/>



Modules from the listed manufacturers can be directly installed and used with the MP3200. A wire-saving bus can be formed with the bit-type distributed I/O terminal connected to the MECHATROLINK-cable connector of the MP3200 Controller.


AnyWire DB Master Module Made by Anywire Corporation

Model: AFMP-01

The AnyWire DB Master module allows a direct connection between the MP3200 controller and the AnyWire system. Because the AnyWire DB Master module has upper compatibility with the UNI-WIRE system, new ways to construct a system are possible.



System Configuration: Full Triple Mode Transmission

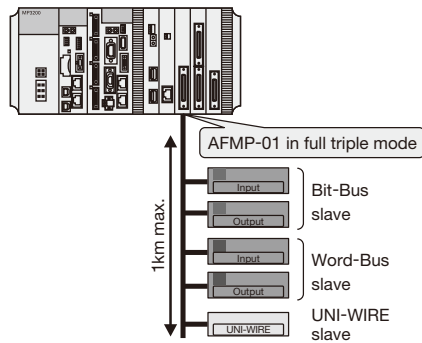

Note: For more details on the AFMP-01 module, contact the Anywire Corporation or visit its web site, <http://www.anywire.jp>.

Features

- 1 The AnyWire system reduces the wiring, time, space, and costs, because you can use general-purpose cables instead of the costly cables.
- 2 The Dual-Bus system realizes high-efficiency, high-speed transmissions and allows analog transmission (128 W) to be connected without disturbing the digital transmission (512 I/O points).
- 3 Recommended for the drive section, which requires reduced wiring, because general-purpose robot cables, cableveyor devices, slip rings, etc. can be used.

CC-Link Interface Board Made by Anywire Corporation

Model: AFMP-02-CA

Slave interface board for connecting the MP3200 to the host CC-Link. Two models are available: the AFMP-02-CA with an AnyWire DB port for reduced wiring and the AFMP-02-C without an Anywire DB port.




Features

- 1 A single CC-Link master station, a PLC from the Q series by Mitsubishi Electric Corporation, can be connected to 16 MP3200 controller with the CC-Link.
- 2 The setup time can be greatly reduced by the self-configuration function of the MP3200.
- 3 Anywire port for reduced wiring saves costs and space.

Note: For more details on the AFMP-02-CA board, contact the Anywire Corporation or visit its web site, <http://www.anywire.jp>.


System Configurations

If a Q-series PLC made by Mitsubishi Electric Corporation is connected to a Machine Controller through CC-Link, only one CC-Link master allows you to connect to 16 controllers including MP3200 Controller.

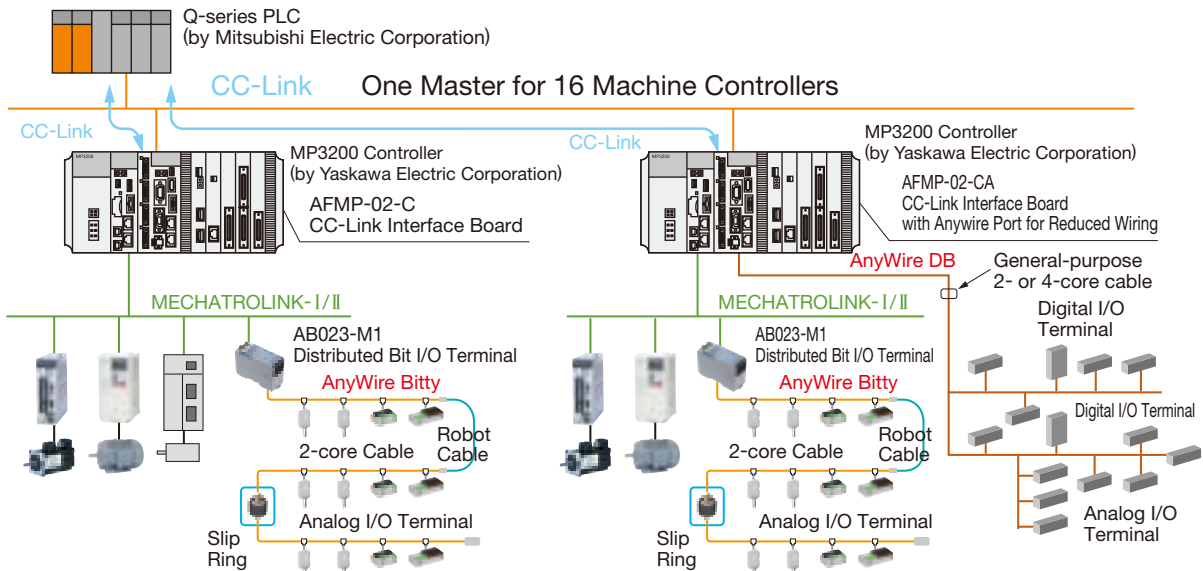

A-net/A-Link Master Unit Module Made by Algo System Co., Ltd.

This A-net/A-Link master unit module can be directly connected to the MP3200 Controller. The resulting system construction uses less wiring and conforms to SEMI E54.17.

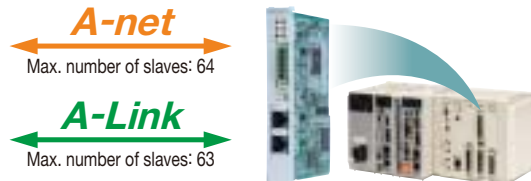

Model: MPANL00-0


Features

- 1 Two H8S units by Renesas Technology Corp. can be added.
- 2 Max. 4032 points can be scanned in 0.95 ms (at 12 Mbps).
Note: Using two A-Link systems (2016 points/system, 0.95 ms at 12 Mbps).
- 3 Shared memory of 512 bytes (response speed: 2.36 ms) with A-net.
- 4 Self-diagnostic function.

Note: For more details about the CUNet master unit module (MPANL00-0), contact Algo System. For more information, visit the following website. <http://www.algosystem.co.jp>

CUNet Master Unit Module (Model number: MPCUNET-0) Made by Algo System Co., Ltd.

The master module for CUNet communications that can be directly connected to the MP3200 Controllers.

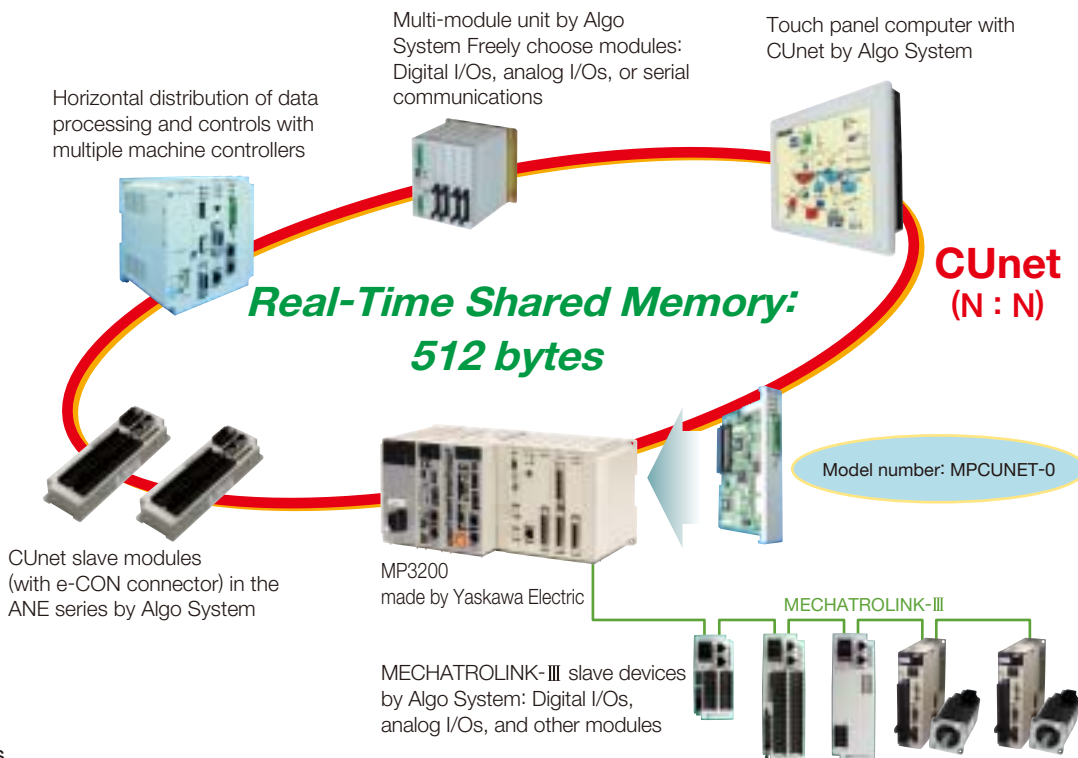


Features

- 1 Pre-mounted H8S unit (By Renesas Electronics).
- 2 Large shared memory of 512 bytes (Response speed: 2.36 ms).
- 3 Distributed control in real time.

Note: For more details about the CUNet master unit module (MPCUNET-0), contact Algo System. For more information, visit the following website. <http://www.algosystem.co.jp>

Replacement Example With PLCs (motion modules) and vision system configuration


Problems

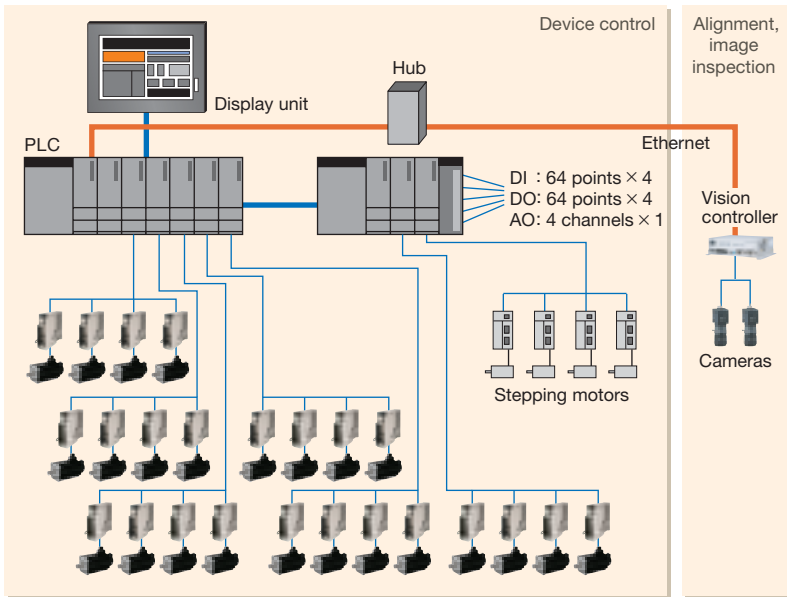

- PLCs, motion modules, and vision controllers are each separate units. A great deal of time is wasted in communications.
- Expensive motion modules and vision controllers are required.
- Different programs are required for the PLCs and vision control.
- Limited number of positioning points.
Example: 500 points/axis






Advantages of using the MP3200 and YVD-001

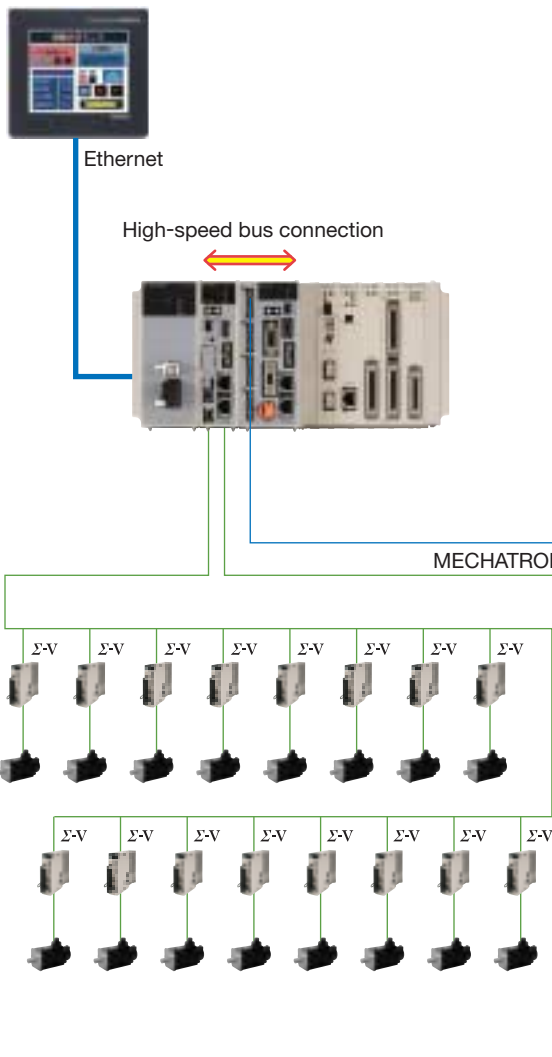


- Together, the MP3200 and YVD-001 can integrate motion and vision control. Each unit is connected by a high-speed bus for interdependent control in real time.
- Control 32 axes with MECHATROLINK-III inside the CPU module of the MP3200. Minimize costs without sacrificing high performance, especially in systems with a large number of axes.
- Easy programming of motion modules and vision controllers with MPE720 Ver.7, an integrated engineering tool.
- A large-capacity register (one million words*) as the position table.

* : General-purpose register with backup capability

MECHATROLINK-III Connection Example

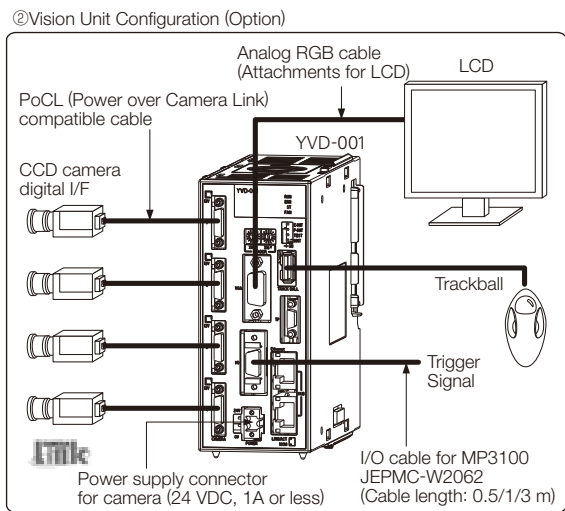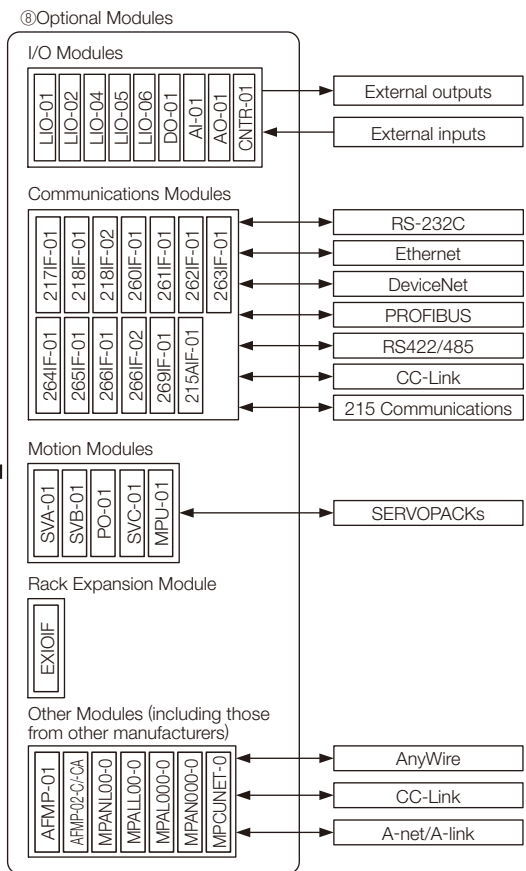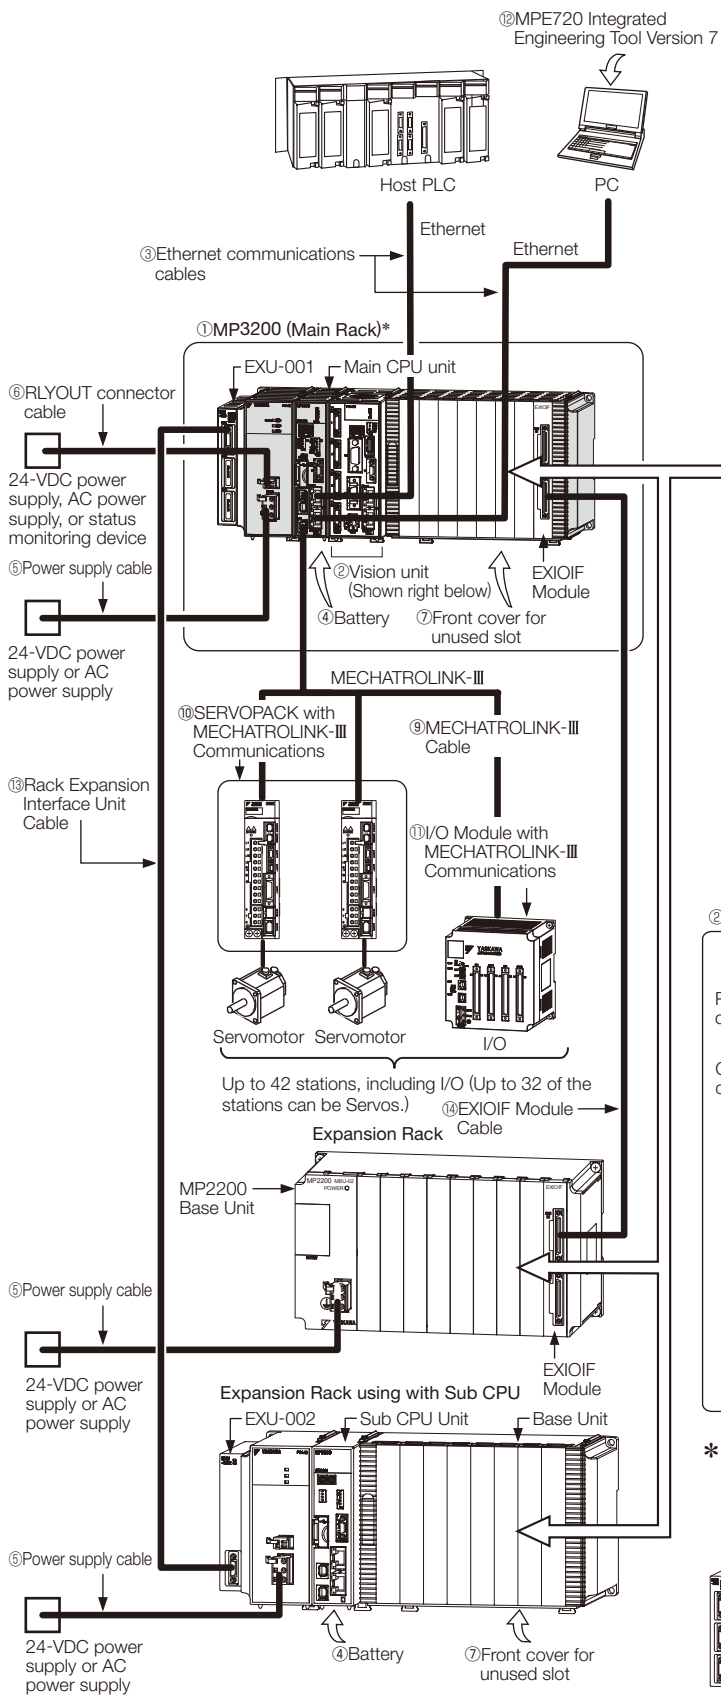

*: You can attach a Sub-CPU on the Main Rack with screws. In this case, attach a Rack Support Bracket (Model: JEPMC-OP3006-E or JEPMC-OP3007-E).

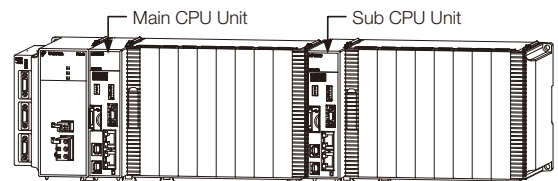

● Details of Components

No.	Name	Use	Model	Remarks
①	MP3200	Power supply unit	Refer to pages 33 and 34 for details.	
		CPU unit		
		Rack Expansion Interface Unit		
		Base unit		
②	Vision Unit	Connects the digital cameras, and carries out high-speed and high-accuracy image processing at high resolution.		
③	Ethernet communications cables	Used to connect the CPU unit to Ethernet communications devices or to connect the CPU unit to a PC that has the MPE720 installed on it.		Use a commercially available cable that meets the following conditions: · Ethernet specification: 100Base-TX · Category 5 or higher · Twisted-pair cable with RJ-45 connectors
④	Battery with special connector	Provides power for the calendar and backup memory while the power is turned OFF.	JEPMC-OP3005	The Battery is provided with the CPU Unit.
⑤	Power supply cable	Connects the power supply unit to a 24-VDC power supply or an AC power supply.		Use a commercially available cable that meets the following conditions: · Wire size: AWG18 to AWG13 (0.8 mm ² to 2.6 mm ²) · Twisted-pair cable
⑥	RLYOUT connector cable	Connects the power supply unit to a 24-VDC power supply, an AC power supply, or a status monitoring device.		Use a commercially available cable that meets the following conditions: · Wire size: AWG28 to AWG14 (0.08 mm ² to 2.0 mm ²)
⑦	Front cover for unused slot	Used to cover unused slots on the base unit.	JEPMC-OP2300	—
⑧	Optional modules	Motion modules, I/O modules, and communications modules are selected based on the application.		Refer to pages 34 to 46 for details.
⑨	MECHATROLINK-III cable	Connects the CPU unit to MECHATROLINK-III communications devices.	JEPMC-W6012-□□-E	Standard cable Length: 0.2 m to 50 m
			JEPMC-W6013-□□-E	Cable with ferrite cores Length: 10 m to 50 m
			JEPMC-W6014-□□-E	Cable with loose wires at one end Length: 0.5 m to 50 m
			JEPMC-W6021	Ferrite Core
⑩	SERVOPACK with MECHATROLINK-III communications	Used to control servomotors.	SGDV-□□□□	Σ-V-series AC SERVOPACK with MECHATROLINK-III communications for Rotational Motor
			21□□□□□□	
			SGDV-□□□□	
⑪	I/O Modules with MECHATROLINK-III Communications	Used to input or output digital, analog, or pulse train signals.	JEPMC-MTD2310-E	24 VDC, 64 inputs, 64 outputs
			JEPMC-MTA2900-E	8 analog input channels
			JEPMC-MTA2910-E	4 analog output channels
			JEPMC-MTP2900-E	2 pulse-train inputs
			JEPMC-MTP2910-E	4 pulse-train outputs
⑫	MPE720 Integrated Engineering Tool Version 7	Used to adjust and maintain AC Servo drives and inverters that are connected to the network.	CPMC-MPE780D	—
⑬	Rack Expansion Interface Unit Cable	Used to use a Rack Expansion Interface Unit to connect the Main Rack to an Expansion Rack.	JEPMC-W3401-□□-E	· Connector on both ends with ferrite cores · Wire size: AWG28 · Twin coaxial cable · Length: 0.5 m to 50 m
⑭	EXIOIF Module Cable	Connect the Base Unit and the Expansion racks or the Expansion racks each other by using the Expansion Interface Module. Note: Use the MP2200 base unit expansion rack (refer to page 34).	JEPMC-W2094-□□-E	· If you use more than one Cable, do not allow the total cable length to exceed 6 m. · Connector on both ends with ferrite cores · Wire size: AWG28 · Equivalent to UL20276 · Length: 0.5 m to 2.5 m
—	Panel-mounting Bracket	Used to mount the MP3200 inside a control panel.	JEPMC-OP3001-E	This Attachment is provided with the Power Supply Unit.

Item	Specification	
Environmental Conditions	Ambient Operating Temperature	0°C to 55°C (0°C to 50°C only for vision unit)
	Ambient Storage Temperature	-25°C to 85°C
	Ambient Operating Humidity	30% to 95% RH (with no condensation)
	Ambient Storage Humidity	5% to 95% RH (with no condensation)
	Pollution Level	Conforms to JIS B 3502 Pollution Degree 2.
	Corrosive Gas	There must be no combustible or corrosive gas.
	Operating Altitude	2,000 m max.
Mechanical Operating Conditions*	Vibration Resistance	Conforms to JIS B 3502. · Continuous vibration: 5 Hz to 9 Hz with single-amplitude of 1.75 mm 9 Hz to 150 Hz with fixed acceleration of 4.9 m/s ² · Intermittent vibration: 5 Hz to 9 Hz with single-amplitude of 3.5 mm 9 Hz to 150 Hz with fixed acceleration of 9.8 m/s ² 10 sweeps each in X, Y, and Z directions for both intermittent and continuous vibration
	Shock Resistance	Peak acceleration: 147 m/s ² (15 G) Duration: 11 ms 3 times each in X, Y, and Z directions
Electrical Operating Conditions	Noise Resistance	Conforms to EN 55011 (Group 1 Class A), EN 61000-6-2, EN 61000-6-4.
Installation Conditions	Ground	Ground to 100 Ω max.
	Cooling Method	Natural cooling or forced-air cooling

*: The conditions also at the time of transportation.

● Control Panel Cooling Methods

The components that are used in the Machine Controller require the ambient operating temperature to be between 0°C and 55°C. Use one of the methods described below to ensure adequate cooling in the control panel.

Note: If the ambient temperature exceeds 50°C, we recommend forced-air cooling.

Control Panels with Natural Cooling

- Do not mount the machine controller at the top of the control panel, where the hot air that is generated inside the panel collects.
- Leave sufficient space above and below the units, and maintain adequate distances from other devices, cable ducts, and other objects to ensure suitable air circulation. Refer to the figure to the right.
- Do not mount the machine controller in any direction other than the specified direction.
- Do not mount the machine controller on top of any device that generates a significant amount of heat.
- Do not subject the machine controller to direct sunlight.


Control Panels with Forced-air Cooling

Use one of the following methods to ensure 0.03 m³/min average airflow below the CPU unit.

- Forced draft method (A fan or a similar device is used to circulate the air in the interior and the exterior of the panel.)
- Forced circulation method (A fan or a similar device is mounted to the airtight panel to circulate the air inside.)

Note: Use the following guideline when selecting the fan:

- CPU Unit's resistance to air flow: 6×10^6 (N·s²/m⁹)
- The CPU-202 has a built-in Fan. You do not need to select or install a separate fan.

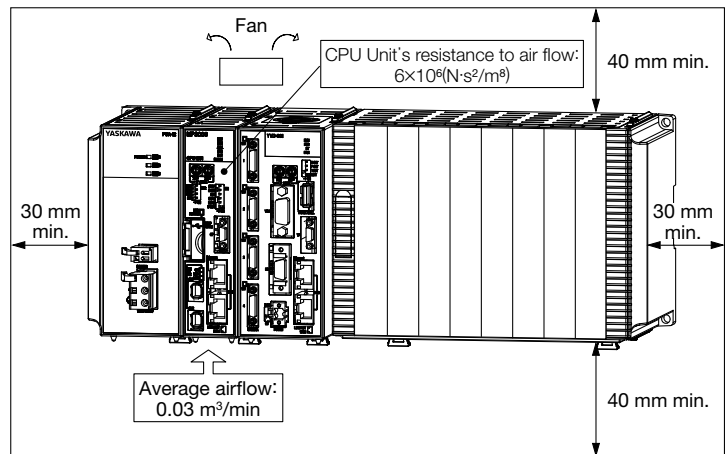

● **MP3200 AC Power Supply Unit (PSA-12) and DC Power Supply Unit (PSD-12)**



Approx. Mass : 600 g

Items	Specifications		
	AC power supply Unit	DC power supply Unit	
Model (Abbreviation)	JEPMC-PSA3012-E (PSA-12)	JEPMC-PSD3012-E (PSD-12)	
Power Supply	Input Voltage	100/200 VAC	24 VDC
	Allowable Input Voltage Range	85 VAC to 132 VAC or 170 VAC to 276 VAC	19.2 VDC to 28.8 VDC
	Allowable Frequency Range	47 Hz to 63 Hz	—
	Input Current	4.0 A max. (at rated input/output)	5.0 A max. (at rated input/output)
	Inrush Current	25 A, 10 ms max. (fully discharged, 132-VAC input, rated output)	50 A, 10 ms max. (fully discharged, 28.8-VDC input, rated output)
		50 A, 10 ms max. (fully discharged, 276-VAC input, rated output)	
	Allowable Momentary Power Loss Time	20 ms	1 ms
	Rated Voltage, Rated Current	5.15 V, 12.0 A	
Output Current Range	0 A to 12.0 A	0.2 A to 12.0 A	
Constant Voltage Accuracy	5.15 V ±2% max. (5.05 V to 5.25 V)		

● **MP3200 CPU Unit (CPU-201/-202)**



Approx. Mass : 600 g



Approx. Mass : 700 g

Items	Specifications	
Model (Abbreviation)	JEPMC-CP3201-E (CPU-201)	JEPMC-CP3202-E (CPU-202)
Flash Memory	Capacity: 40 MB (32 MB of user memory)	Capacity: 40 MB (32 MB of user memory)
SDRAM	Capacity: 128 MB (with ECC)	Capacity: 512 MB (with ECC)
SRAM	Capacity: 8 MB (battery backup)	Capacity: 8 MB (battery backup)
MECHATROLINK	<ul style="list-style-type: none"> One circuit for MECHATROLINK-III ×2 ports Communication Cycle: 250 μs to 32.0 ms Master function, slave function 	<ul style="list-style-type: none"> One circuit for MECHATROLINK-III ×2 ports Communication Cycle: 125 μs to 32.0 ms Master function, slave function
Ethernet	10BASE-T/100BASE-TX × 2 ports (hub)	
Calendar	Seconds, minutes, hour, day, week, month, year, day of week, and timing (battery backup)	
USB	<ul style="list-style-type: none"> USB 2.0 Type-A host, 1 port Compatible devices: USB storage 	

● **MP3200 Base Units (MBU-B03/-B05/-B08)**



Approx. Mass : 400 g



Approx. Mass : 400 g



Approx. Mass : 500 g

Items	Specifications		
	3 Slots	5 Slots	8 Slots
Model	JEPMC-BUB3003-E	JEPMC-BUB3005-E	JEPMC-BUB3008-E
Abbreviation	MBU-B03	MBU-B05	MBU-B08
Attachable Modules	Optional modules		

● **Option Vision Unit (YVD-001)**



Model: JEPMC-YVD3001-E
Approx. Mass : 590 g

Items	Specifications	
Image Processing	Blob Analysis	Feature extraction and measurement using binary images
	Template Matching	Normalized correlation pattern matching
Image Input	Camera Interface	Mini Camera Link (PoCL) ×4
	No. of Pixels	640×480 to 2440×2048 (5 megapixels)
Monitor Output	Monitor Interface	VGA, 15pin D-sub connector
	Display Colors	Graphics: 64 colors, Images: 256 gray levels
Operating Interface	Trackball	USB mouse interface
Communication Interface	Ethernet	100BASE-TX × 2 ports (hub)
	Image Memory	For Capture: 64 MB, for analysis: 32 MB, for display: 64 MB
Memory	Data Storage Memory	32 MB (Data storage: 128 KB; Templates: Remaining memory), non-volatile
	External Memory	USB memory (2 GB) of CPU unit
I/O	Trigger Input	4 points
	Flashlight Output	4 points
Programming Methods	Image Processing Programs	Programming at CPU side (ladder language, motion language)

Note: Estimates are required before ordering this product. Contact your Yaskawa representative for more information.

● **Option** Rack Expansion Interface Unit (EXU-001/EXU-002)



Approx. Mass : 200 g Approx. Mass : 200 g

Items	Specifications	
	For Main Rack	For Expansion Rack
Model	JEPMC-EXU3001-E	JEPMC-EXU3002-E
Abbreviation	EXU-001	EXU-002
Number of Ports	3	1
Rack Numbers	Rack 1 (Main Rack)	Racks are numbered as follows according to the connection port on the EXU-001. · Connected to port 1: Rack 5 · Connected to port 2: Rack 6 · Connected to port 3: Rack 7

Connection Module

● Expansion Interface Module (EXIOIF)



Model: JAPMC-EX2200-E
Approx. Mass: 80 g

Items	Specifications
Number of Expansion Racks	4 racks max.
Rack No.	Automatically identified

● MP2200 Base Units for Rack Expansion



Model: JEPMC-BU2200-E
Approx. Mass: 665 g
Model: JEPMC-BU2210-E
Approx. Mass: 520 g



Model: JEPMC-BU2220-E
Approx. Mass: 500 g

Items	Specifications		
	JEPMC-BU2200-E (MBU-01)	JEPMC-BU2210-E (MBU-02)	JEPMC-BU2220-E (MBU-03)
Power Supply	Input power voltage: 85 VAC to 132 VAC/198 VAC to 276 VAC Allowable Frequency Range: 47 Hz to 63 Hz Current consumption: 1.5 A or less with I/O rating Inrush current: 40 A or less when completely discharged, 275 VAC input, output rating Allowable power loss time: 20 ms	Input power voltage: 24 VDC ±20% Current consumption: 3.0 A or less with I/O rating Inrush current: 30 A or less when completely discharged, output rating Allowable power loss time: 1 ms	Input power voltage: 24 VDC ±20% Current consumption: 1.0 A or less with I/O rating Inrush current: 30 A or less when completely discharged, output rating Allowable power loss time: 1 ms
Motion Network	Not available for the base unit		
I/O Signals	Not available for the base unit		
Slot for Optional Modules	9 slots		4 slots
Expansion Configuration	Maximum of 4 base units can be connected using the EXIOIF.		
Dimensions (mm)	240 (W) × 130 (H) × 108 (D)		120 (W) × 130 (H) × 108 (D)

Multiple-CPU Module (MPU-01)

The MPU-01 module has both CPU functions and the functions of a built-in SVC-01. This module is capable of control in complete synchronization with the main CPU and enables synchronization among MPU-01 modules.



Model: JAPMC-CP2700-E
Approx. Mass : 86 g

Items	Specifications
Motion Network	MECATROLINK-III ×1 port
Max. Number of Controlled Axes	16 axes
High-speed Scan	0.25 ms, 0.5 ms to 32.0 ms (in units of 0.5 ms)
Low-speed Scan	2.0 ms to 300.0 ms (in units of 0.5 ms)
Program Memory Capacity	11.5 MB

Motion Modules

● MECHATROLINK-III Motion Module (SVC-01)



Model: JAPMC-MC2320-E
Approx. Mass: 70 g

Items	Specifications
Communication Circuits	1 circuit
Communication Ports	2 ports
Terminator	Not required
Transmission Speed	100 Mbps
Communication Cycle	125 μ s, 250 μ s, 500 μ s, 1ms
Number of Connecting Stations	21 stations (16 axes for servo drives)/1 ms, 14 stations (14 axes for servo drives) /500 μ s, 8 stations (8 axes for servo drives) /250 μ s, 4 stations (4 axes for servo drives) /125 μ s
Retry Function	Available with MECHATROLINK-III
Slave Function	Available with MECHATROLINK-III
Transmission Distance	Distance between stations : 20 cm to 100 m

● MECHATROLINK-II Motion Module (SVB-01)



Model: JAPMC-MC2310-E
Approx. Mass: 80 g

Items	Specifications
Communication Circuits	1 circuit
Communication Ports	2 ports
Terminator	External resistor (JEPMC-W6022 required)
Transmission Speed	10 Mbps
Communication Cycle	0.5 ms, 1 ms, 1.5 ms, 2 ms
Number of Connecting Stations*	21 stations (16 axes for servo drives) /2 ms, 15 stations (15 axes for servo drives) /1.5 ms, 9 stations (9 axes for servo drives) /1 ms, 4 stations (4 axes for servo drives) /0.5 ms
Retry Function	Available with MECHATROLINK-II
Slave Function	Available with MECHATROLINK-II
Transmission Distance	See "MECHATROLINK-II Repeater" on page 51.

*: MECHATROLINK-II (32-byte mode)


● Analog Output Motion Module (SVA-01)



Model: JAPMC-MC2300-E
Approx. Mass: 100 g

Items	Specifications
Number of Controlled Axes	2
Analog Output	2 channels/1 axis, -10 V to +10 V, 16-bit D/A
Analog Input	2 channels/1 axis, -10 V to +10 V, 16-bit A/D
Pulse Input	1 channel/1 axis, 5-V differential inputs, phase A/B pulse, and 4 Mpps (16 Mpps with 4 multipliers)
Input Signals	6 points/1 axis, 24 VDC, 4 mA, and source mode or sink mode input
Output Signals	6 points/1 axis, 24 VDC, 100 mA, open collector, and sink mode output

● Pulse Output Motion Module (PO-01)



Model: JAPMC-PL2310-E
Approx. Mass: 100 g

Items	Specifications
Number of Controlled Axes	4
Pulse Output	Output Method : CW/CCW, sign + pulse, and phase A/B Maximum Frequency: 4 Mpps with CW/CCW or sign + pulse, 1 Mpps with phase A/B (before multiplication) Interface : 5-V differential outputs
Digital Input	5 points \times 4 channels, source mode input DI_0 : Separate for each power supply... 5 V/3.9 mA, 12 V/10.9 mA, 24 V/4.1 mA DI_1 to DI_4 : Power supply shared ... 24 V/4.1 mA
Digital Output	4 points \times 4 channels Open collector (sink mode) output (24 V/100 mA)
Current Consumption	5 V, 1.0 A max.

Communication Modules

● General-purpose Serial Communication Module (217IF-01)



Model: JAPMC-CM2310-E
Approx. Mass: 100 g

For RS-232C Communication

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	76.8 kbps*
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

*: Connection may not be possible depending on the characteristics of the connected devices. If connection is not possible, decrease the setting of the baud rate.

For RS-422/485 Communication

Items	Specifications
Interface	One port (RS-422 or -485)
Connector	MDR 14 pins (Female)
Max. Transmission Distance	300 m
Max. Transmission Speed	76.8 kbps
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1 (RS-422), 1: N (RS-485)*
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

*: N: 31 units maximum

● Ethernet Communication Module (218IF-01/-02)



218IF-01 Module
Model: JAPMC-CM2300-E
Approx. Mass: 90 g

For Ethernet Communication

Items	Specifications
Interface	One port (10BASE-T for 218IF-01, 100BASE-TX/10BASE-T for 218IF-02) (RJ-45 modular jack)
Max. Segment Length	100 m
Transmission Speed	218IF-01: 10 Mbps, 218IF-02: 100 Mbps/10 Mbps
Access Mode	IEEE802.3, CSMA/CD
Connections	TCP/UDP/IP/ARP/ICMP
Max. Number of Words in Transmission	218IF-01: 512 words, 218IF-02: 2046 words
Communication Protocols	Extended MEMOBUS, MEMOBUS, MELSEC (A-compatible 1E frame), Non-procedure, MODBUS/TCP
Max. Number of Connections	20 stations

For RS-232C Communication



218IF-02 Module
Model: JAPMC-CM2302-E
Approx. Mass: 90 g

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	19.2 kbps (Using 218IF-01), 115.2 kbps (Using 218IF-02)
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

● DeviceNet Communication Module (260IF-01)



Model: JAPMC-CM2320-E
Approx. Mass: 90 g

For DeviceNet Communication

Items	Specifications	
Number of Circuits	1	
Applicable Communication	Conforms to DeviceNet · I/O transmission (polled I/O and bit-strobed I/O) · Explicit messaging	
I/O Communication	Max. Number of Slaves	63 nodes
	Max. I/O Bytes	2048 bytes, 256 bytes per node
Message Communication (Only for Master)	Max. Number of Nodes	63 nodes Synchronous communications possible: 4 nodes
	Max. Message Length	256 bytes
	Executed Functions	MSG-SND function
Switches on the Front	Two rotary switches: Node address settings DIP switch: Settings for transmission speed and switching master or slave	
Indicators	2 LEDs: MS and NS	
Power Voltage for Communication	24 VDC \pm 10% (Using the specially designed cable)	
Max. Current Consumption	Communication power: 45 mA (Supplied by transmission connectors) Internal circuit power supply (supplied from Basic Module).	

For RS-232C Communication

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	19.2 kbps
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

● PROFIBUS Communication Module (261IF-01)



Model: JAPMC-CM2330-E
Approx. Mass: 90 g

For PROFIBUS Communication

Items	Specifications
Functions	DP slave, Cyclic communication (DP standard function)
Transmission Speed	12 M/6 M/4 M/3 M/1.5 M/750 k/500 k/187.5 k/93.75 k/19.2 k/9.6 kbps (Automatic detection)
Configuration	By PROFIBUS Master
Slave Address	1 to 64
I/O Processing	I/O assignments: 61 words max. each for inputs and outputs
Diagnostic Functions	Status and Slave status display using MPE720 I/O error display using system register

For RS-232C Communication

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	19.2 kbps
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

● FL-net Communication Module (262IF-01)



Model: JAPMC-CM2303-E
Approx. Mass: 80 g

For 262IF-01 Communication

Items		Specifications		
FL-net Transmission	Transmission Specifications*1	Interface	100BASE-TX 10BASE-T	
		Transmission Mode	Full duplex or half duplex	
		Transmission Speed	100 Mbps 10 Mbps	
		Max. Segment Length	100 m between hub and nodes if UTP cables are used	
		Connector	RJ-45 connector	
		Auto Negotiation	Supported (Transmission speed and communication mode cannot be fixed.)	
	Cyclic Communication Specifications	Max. Number of Nodes	254 nodes max. if repeaters are used (Only 64 nodes, including the local node, can be allocated.)*2	
		Data Size	Max. data size within network Area 1 (Bit data) : 8 kbits Area 2 (Word data) : 8 kwords Max. data size per station (node) Area 1 + Area 2 : 8 kbits + 8 kwords can be allocated.	
		Media Access Control Method	N : N	
	Message Communication Specifications	Number of Message Channels	10	
		Engineering Communication	None	
		Message Service	Read Word Block, Write Word Block, Read Network Parameter, Write Network Parameter*3, Change Other Node to Stop Mode*3, Change Other Node to Run Mode*3, Read Profile, Transmissive Message, Read Log Data, Clear Log Data, Return Message	
Number of Transmission Words		512 words max.		

*1 : Conforms to Ethernet specifications

*2 : The number of nodes that the 262IF-01 can allocate to I/O is limited to 64, including the local node, in accordance with the specifications of the MP series Machine Controllers.

*3 : Supported by client nodes only. (In FL-net communications, the node sending data is called the client, and the node receiving data is called the server.)

● EtherNet/IP Communication Module (263IF-01)



Model: JAPMC-CM2304-E
Approx. Mass: 80 g

For 263IF-01 Communication

Items		Specifications		
EtherNet/IP Transmission	Transmission Specifications*1	Interface	100BASE-TX 10BASE-T	
		Transmission Mode	Full duplex or half duplex	
		Transmission Speed	100 Mbps 10 Mbps	
		Max. Segment Length	100 m between hub and nodes if UTP cables are used	
		Connector	RJ-45 connector	
		Auto Negotiation	Supported (Transmission speed and communication mode cannot be fixed.)	
	I/O Communication Specifications	Max. Number of Connectable I/O Devices	64 units (Does not include the devices used for explicit message communication)*2	
		Max. Number of I/O Bytes	Max. Number of I/O Bytes within the network Inputs/outputs : 8192 bytes each per system (Total number of bytes of I/O data exchanged among all connected devices) Inputs/outputs : 500 bytes each per device	
		Communication Mode	Scanner and adapter	
	Explicit Message Communication Specifications	Max. Number of Connectable Devices for Explicit Message Communication	64 units (Number of devices that can communicate simultaneously : 10)*2	
		Number of Message Channels	10	
		Max. Number of Message Bytes	504 bytes	
Communication Mode		Client and server		
Connection Type		Unconnected type (UCMM) When the module functions as a server, connected type (class 3) is also supported.		

*1 : Conforms to Ethernet specifications

*2 : Max. Number of connectable devices is based on the specifications of the MP series Machine Controllers.

● EtherCAT Communication Module (264IF-01)




Model : JAPMC-CM2305-E
Approx. Mass : 100 g

For 264IF-01 Communication

Items		Specifications	
EtherCAT Transmission	Transmission Specifications	Transmission Mode	Full duplex
		Transmission Speed	100 Mbps
		Distance between Nodes	100 m
		Connector	RJ-45 connector, 2 ports (1 circuit)
		Cable	CAT 5e STP cable Straight or cross cable
		Topology	Line topology (structure)
		Functions	As a slave station of EtherCAT
		Address	Automatic allocation by Master
	Process Data Communications (Cyclic)	Supported Protocol	EtherCAT standard (Protocols such as CoE, SoE, and VoE are not supported.)
		Data Size	Input data : 198 words max. Output data : 198 words max. Input data + Output data : 200 words max. in total
		Media Access Control Method	Between master and slave (1 : 1)
	Mailbox Communication (Message)	Communication Cycle	According to the configuration of Master
		Supported Protocol	EtherCAT standard (Protocols such as CoE, EoE, FoE, SoE, and VoE are not supported.)
	Message Service	System message only (Cannot use user messages such as read/write memory.)	

● CompoNet Communication Module (265IF-01)




Model: JAPMC-CM2390-E
Approx. Mass: 80 g

For CompoNet Communication

Items		Specifications
Number of Circuits		1
Applicable Communication		I/O communication, message communication
Transmission Speed		4 Mbps. 3 Mbps. 1.5 Mbps. 93.75 kbps
Master/Slave		Master
Conditions of Use for Repeater Units		Up to 64 units can be connected in one network. Lines can be extended a maximum of two levels from the master unit using repeater units.
I/O Communication	Max. Number of Slaves	384 nodes
	Max. I/O Bytes	32 bytes per node
Message Communication	Max. Number of Nodes	384 nodes (Synchronous communications possible: 10 nodes)
	Max. Message Length	256 bytes
	Executed Functions	MSG-SND function
Switches on the Front		DIP switch: Transmission speed
Indicators		4 LEDs: MS, NS, TX, RX
Power Voltage for Communication		24 VDC \pm 10% (Using the specially designed cable)

Optional Modules

● PROFINET Communication Master Module (266IF-01)*



Model: JAPMC-CM2306-E
Approx. Mass: 100 g

For PROFINET Communication

Items	Specifications
Real-time Class	RT_CLASS_1
PROFINET IO Conformance Class	Conformance Class-B
Transmission Speed	100 Mbps
Max. Transmission Distance	100 m/segment (between nodes)
Max. Number of Connecting Stations	128
Communication Cycle	1, 2, 4, 8, 16, 32, 64, 128, 256, or 512 (unit: ms)
Max. Transmission Size	1024 bytes/station Input: 5712 bytes; Output: 5760 bytes

*: Estimates are required before ordering this product. Contact your Yaskawa representative for more information.

● PROFINET Communication Slave Module (266IF-02)



Model: JAPMC-CM2307-E
Approx. Mass: 100 g

For PROFINET Communication

Items	Specifications
Real-time Class	RT_CLASS_1
PROFINET IO Conformance Class	Conformance Class-B
Transmission Speed	100 Mbps
Max. Transmission Distance	100 m/segment (between nodes)
Max. Number of Connecting Stations	-
Communication Cycle	Same as master module
Max. Transmission Size	Input: 1024 bytes; Output: 1024 bytes

● CC-Link IE Field Slave Module (269IF-01)



Model: JAPMC-CM2308-E
Approx. Mass: 90 g

CC-Link Communications Specifications


Items	Specifications	
CC-Link IE Field Basic Communications Specifications	Transmission Speed	1 Gbps
	Communications Method	Token passing
	Link Scan Time Control	Fixed or best effort (specified at master station)
	Synchronization	None
	Number of Nodes Connected on One Network	254 (total for masters and slaves)
	Maximum Distance between Nodes	100 m
	Maximum Number of Branches	If on the same Ethernet network, no upper limit.
	Topologies	Line, star, line+star, or ring
MAC Address	One station occupied.	
269IF-01 Module Communications Specifications	Station Type	Intelligent device station
	Station Numbers	1 to 120
	Supported	Transmission control: Supported Cyclic transmissions: Supported Transient transmissions: Supported Synchronized control: Not supported
	Number of Link Points	Maximum Number of Linked Words and Bits in Network: 16,384 bits (RX, RY), 8,192 words (RWw, RWr) Maximum Number of Linked Words and Bits Per 269IF-01 Module Station: 2,048 bits (RX, RY), 1,024 words (RWw, RWr)
	Message Communications	960 bytes max. per channel
Number of Message Channels	2 channels (Simultaneous execution is possible.)	

Note: For details of the 269IF-01 Module, refer to the User's Manual (Manual No.: SIEPC88070049).

The following definitions are used in relation to CC-Link slave station.

- RX: Bit data that is sent from a slave station to the master station.
- RY: Bit data that is received at a slave station from the master station.
- RWr: Word data that is sent from a slave station to the master station.
- RWw: Word data that is received at a slave station from the master station.

● MPLINK Communication Module (215AIF-01 MPLINK)



Model: JAPMC-CM2360-E
Approx. Mass: 130 g

For MPLINK Communication


Items	Specifications
Transmission Method	MPLINK
Interface	One port
Connector	USB port with T-branch connector*
Cable	MECHATROLINK cable (JEPMC-W6002-□□-E)
Transmission Speed	10 Mbps
Max. Transmission Distance	50 m: 16 stations 100 m: 32 stations (With MECHATROLINK-II JEPMC-REP2000 repeater)
Max. Number of Words in Link Transmission	4096 words per circuit. 1024 words per station.
Media Access Control Method	N : N
Max. Number of Connecting Stations	16 stations (32 stations with repeater)
Relay Function	Available

*: A T-branch connector is included in the package. Spares can also be ordered separately. (Model: JEPMC-OP2310)

For RS-232C Communication

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	19.2 kbps
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

● CP-215 Communication Module (215AIF-01 CP-215)



Model: JAPMC-CM2361*1
Approx. Mass: 130 g

For CP-215 Communication

Items	Specifications
Transmission Method	CP-215
Interface	One port
Connector	USB port with MR connector converter*2
Cable	No ready-made cable available. See page 61 for details on cable specifications.
Transmission Speed	2 Mbps / 4 Mbps
Max. Transmission Distance	270 m at 2 Mbps and 170 m at 4 Mbps.
Max. Number of Words in Link Transmission	2048 words per circuit. 512 words per station.
Media Access Control Method	N : N
Max. Number of Connecting Stations	32 stations (64 stations with repeater)
Relay Function	Available

*1 : Cannot be mounted in the slot to the left of 260IF-01. JAPMC-CM2361 modules cannot be mounted side by side.

*2 : An MR connector converter is included in the package. Spares can also be ordered separately. (Model: JEPMC-OP2320)

For RS-232C Communication

Items	Specifications
Interface	One port
Connector	D-sub 9 pins (Female)
Max. Transmission Distance	15 m
Max. Transmission Speed	19.2 kbps
Access Mode	Asynchronous (Start-stop synchronization)
Communication Protocols	MEMOBUS (Master or Slave), MELSEC (A-compatible 1C frame, type: 1), OMRON (only for host mode), Non-procedure
Media Access Control Method	1:1
Transmission Format (Can be set)	Data bit length: 7 or 8 bits Stop bits: 1 or 2 bits Parity bits: Even, odd, or none

I/O Modules

● I/O Modules (LIO-01/-02)



LIO-01 Module
Model: JAPMC-IO2300-E
Approx. Mass: 80 g



LIO-02 Module
Model: JAPMC-IO2301-E
Approx. Mass: 80 g

Digital I/O for LIO-01/-02 Modules

Items	Specifications
Input Signals	16 points (All connected) and 24 VDC \pm 20%, 5 mA (TYP) Sink mode or source mode input and photocoupler isolation Min. ON voltage/current: 15 V/2.0 mA Max. OFF voltage/current: 5 V/1.0 mA Max. Response time: OFF \rightarrow ON 0.5 ms and ON \rightarrow OFF 0.5 ms Interruption (DI-00): DI-00 can be used for interruptions. If an interruption is enabled, the interrupt drawing is started when DI-00 is set to ON. Pulse latch (DI-01): DI-01 can be used for pulse latching. If pulse latching is enabled, the pulse counter is latched when DI-01 is set to ON.
Output Signals	16 points (All connected) and 24 VDC \pm 20%, 100 mA max. Open collector: sink mode output (LIO-01 module) source mode output (LIO-02 module) Photocoupler isolation and Max. OFF current: 0.1 mA Max. Response time: OFF \rightarrow ON 1 ms and ON \rightarrow OFF 1 ms Output protection : Fuse (for protection against fires caused by an overcurrent when outputting after a short circuit occurred) If circuit protection is required, provide a fuse for each output circuit.

Pulse Input for LIO-01/-02 Modules

Items	Specifications
Number of Channels	1 (Phase A, B, or Z input)
Input Circuit	Phase A/B: 5 V differential inputs, no insulation, and max. frequency 4 MHz Phase Z: 5 V/12 V photocoupler inputs and max. frequency 500 kHz
Input Method	A/B (1,2, or 4 multipliers), sign (1 or 2 multipliers), UP/DOWN (1 or 2 multipliers)
Latch Input	Pulse latch with phase Z or DI-01 Max. Response time: 1 μ s when input with phase Z; 60 μ s when input with DI-01
Others	Coincident detection; Preset and clear functions for counter values

● I/O Modules (LIO-04/-05)




LIO-04 Module
Model: JAPMC-IO2303-E
Approx. Mass: 80 g



LIO-05 Module
Model: JAPMC-IO2304-E
Approx. Mass: 80 g

Items	Specifications
Input Signals	32 points (8 points connected) and 24 VDC \pm 20%, 4.1 mA (TYP) Sink mode or source mode input and photocoupler isolation Min. ON voltage/current: 15 V/2.0 mA Max. OFF voltage/current: 5 V/1.0 mA Max. Response time: OFF \rightarrow ON 0.5 ms and ON \rightarrow OFF 0.5 ms Interruption (DI-00, DI-01, DI-16, DI-17): DI-00, DI-01, DI-16, and DI-17 can be used for interruptions. If an interruption is enabled, the interrupt drawing is started when DI-00, DI-01, DI-16, or DI-17 is set to ON.
	Note: See right for the derating conditions.
Output Signals	32 points (8 points connected) and 24 VDC \pm 20%, 100 mA max. Open collector: sink mode output (LIO-04 module), source mode output (LIO-05 module) Photocoupler isolation and Max. OFF current: 0.1 mA Max. Response time: OFF \rightarrow ON 0.5 ms and ON \rightarrow OFF 1 ms Output protection: Fuse (for protection against fires caused by an overcurrent when outputting after a short circuit occurred) If circuit protection is required, provide a fuse for each output circuit.

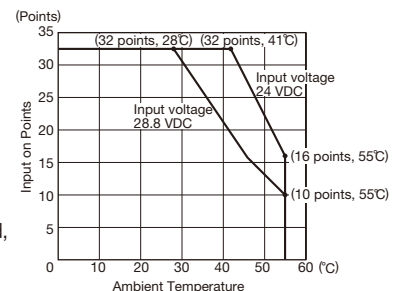

● I/O Module (LIO-06)



Model: JAPMC-IO2305-E
Approx. Mass: 80 g

LIO-06 Module Specifications

Items	Specifications	
Digital Input Signals	Number of Input Points	8
	Input Method	Sink mode/source mode
	ON Voltage/Current	15 VDC min./2 mA min.
	OFF Voltage/Current	5 VDC max./1 mA max.
	Max. Response Time	OFF → ON: 0.5 ms max., ON → OFF: 0.5 ms max.
	Number of Common Points	1
Digital Output Signals	Number of Output Points	8
	Output Method	Sink mode
	External Voltage	19.2 VDC to 28.8 VDC
	Output Current	100 mA/point
	ON Voltage	1 V max.
	Current Leakage while OFF	0.1 mA max.
	Max. Response Time	OFF → ON: 0.25 ms max., ON → OFF: 1 ms max.
	Number of Common Points	1
Analog Input Signals	Analog Input Range	-10 V to +10 V
	Number of Channels	1
	Input Impedance	Approx. 20 kΩ
	Input Voltage Characteristics	±10 V (±31276) Resolution: 16 bits
Analog Output Signals	Analog Output Range	-10 V to +10 V
	Number of Channels	1
	Output Voltage Characteristics	±10 V (±31276) Resolution: 16 bits
Pulse Counter	Number of Channels	1
	Counter Mode	Reversible counter
	A/B Pulse Signal Form	5-V differential input
	A/B Pulse Signal Polarity	Positive logic/negative logic
	Pulse Counting Methods	Sign (Multiplier: 1 or 2) UP/DOWN (Multiplier: 1 or 2) A/B pulse (Multiplier: 1, 2, or 4)
	Max. Frequency	4 MHz
	Number of Latch Input Points	Can be selected from two points (Phase-Z latch or DI latch) Response time: 1 μs max. at phase-Z input, 60 μs max. at DI_01 input
	Coincidence Detection Function	Available (Output terminal: DO_07)
	Coincident Interruption	Available


● Output Module (DO-01)



Model: JAPMC-DO2300-E
Approx. Mass: 80 g

Items	Specifications
Number of Output Points	64
Output Method	Transistor or open collector: sink mode output
Isolation	Photocoupler isolation
Output Voltage	24 VDC (19.2 V to 28.8 V)
Max. Output Current	100 mA
Max. OFF Current	0.1 mA
Max. Response Time	OFF → ON: 0.5 ms / ON → OFF: 1 ms
Number of Common Points	8
Protective Circuit	Fuse for common circuits
Fuse Rating	1 A
Error Detection	Fuse blowout detection

● Analog Input Module (AI-01)



Model: JAPMC-AN2300-E
Approx. Mass: 100 g

Items	Specifications	
Analog Input Range	-10 V to +10 V	0 mA to 20 mA
Number of Channels	8 [(4 channels/connector) × 2]	
Number of Channels to be Used	1 to 8	
Isolation	Between channels: Not isolated, Between input connector and system power supply: Photocoupler isolation	
Max. Rated Input	±15 V	±30 mA
Input Impedance	20 kΩ	250 Ω
Resolution	16 bits (-31276 to +31276)	15 bits (0 to +31276)
Accuracy (0°C to 55°C)	±0.3% (±30 mV)*	±0.3% (±0.06 mA)*
Input Conversion Time	1.4 ms max.	
Current Consumption	5 V, 500 mA	

*: After offset and gain adjustment by MPE720.

● Analog Output Module (AO-01)



Model: JAPMC-AN2310-E
Approx. Mass: 90 g

Items	Specifications	
Number of Channels	4	
Number of Channels to be Used	1 to 4	
Isolation	Between channels: Not isolated, Between input connector and system power supply: Photocoupler isolation	
Analog Output Range	-10 V to +10 V	0 V to +10 V
Resolution	16 bits (-31276 to +31276)	15 bits (0 to +31276)
Maximum Allowable Load Current	±5 mA	
Accuracy	25°C	±0.1% (±10 mV)
	0°C to 55°C	±0.3% (±30 mV)
Output Delay Time	1.2 ms*	
Current Consumption	5 V, 800 mA max.	

*: After change with a full scale of -10 V to +10 V.

● Counter Module (CNTR-01)



Model: JAPMC-PL2300-E
Approx. Mass: 85 g

Items	Specifications
Number of Channels	2
Input Circuit (Selected by software)	5-V differential: 4-MHz response frequency (RS-422, not isolated) 12 V: 120-kHz response frequency (12 V, 7 mA, current source mode input, and photocoupler isolation)
Input Method	A/B (1, 2, or 4 multipliers), UP/DOWN (1 or 2 multipliers), and sign (1 or 2 multipliers)
Counter Functions	Reversible counter, interval counter, and frequency measurement
Maximum Frequency	4 MHz with 5-V differential input (16 MHz with 4 multipliers)
Coincident Interruption	Simultaneous output to CPU module via system bus and output module.
Coincident Output	2 points, 24 V, 50 mA, current sink mode input, and photocoupler isolation
DO Output	2 points, 24 V, 50 mA, current sink mode input, and photocoupler isolation (zone output, speed-coincidence output, and frequency-coincidence output)
PI Latch Input	2 points, 24 V, source mode input, and photocoupler isolation
Current Consumption	5 V, 600 mA

MECHATROLINK-III Compatible Modules

● Hub Module



Model : JEPMC-MT2000-E
Approx. Mass : 800 g

Items	Specifications
Data Transfer Method	MECHATROLINK-III
Transmission Speed	100 Mbps
Transmission Medium	MECHATROLINK-III cable, model : JEPMC-W6012-□□-E
Number of MECHATROLINK Ports	Master-side port : 1 (CNM1) to connect the master station Slave-side port : 8 (CNS1 to CNS8) to connect slave stations
Arbitration	FIFO arbitration discipline Error when multiple slave-side ports receive data at the same time
Transmission Delay Time between Ports	600 ns (typ)
Indicators	1 indicator for power supply ON/OFF, 9 indicators for port link status
External Power Supply	24 VDC (±20%), 0.5 A
Installation Orientation	Vertical or horizontal
Exterior	Painted

● MECHATROLINK Compatible Gateway Module (GW3100)



Model: JEPMC-GW3100-E
Approx. Mass: 200 g

Items	Specifications	
Power Supply	Input Voltage	24 VDC
	Allowable Input Voltage Range	19.2 VDC to 28.8 VDC
	Current Consumption	1 A max.
	Inrush Current	40 A, 10 ms max.
Motion Network	One circuit for MECHATROLINK-III Transmission speed: 100 Mbps Transmission cycle: 0.25 ms to 8 ms	
	One circuit for MECHATROLINK-II Transmission speed: 10 Mbps Terminator: built-in	
USB	1 port	

● 64-point I/O Module



Model : JEPMC-MTD2310-E
Approx. Mass : 550 g

Items	Specifications
I/O Signals	Input: 64 points, 24 VDC, 5 mA, sink/source mode input Output: 64 points, 24 VDC, 50 mA when all points ON* sink mode output
External Power Supply	24 VDC (19.2 V to 28.8 V) Rated current: 0.5 A

* : The max. rating is 100 mA per point (depending on derating conditions).

● Analog Input Module (MTA2900)



Model: JEPMC-MTA2900-E
Approx. Mass : 300 g

Items		Specifications			
Analog Input	Analog Input Range	-10 V to +10 V	0 V to +10 V	0 mA to 20 mA	
	Number of Channels	8 [(4 channels/connector) × 2]			
	Number of Channels to be Used	1 to 8			
	Isolation	Between channels: Not isolated			
	Max. Rated Input	± 15 V		± 30 mA	
	Input Impedance	20 kΩ		250Ω	
	Resolution	16 bits (-31276 to +31276)	15 bits (0 to +31276)		
	Absolute Accuracy *1	100 mV max.		0.3 mA max.	
	Accuracy	25°C *2	±0.1% (±10 mV)	±0.1% (±0.02 mA)	
		0°C to 55°C	±0.3% (±30 mV)	±0.3% (±0.06 mA)	
Input Conversion Time *3	1.4 ms max.				
Motion Network	Two circuits for MECHATROLINK-III Transmission distance: 20 cm to 100 m		Transmission speed: 100 Mbps Terminator: not required		
External Power Supply	24 VDC (19.2 V to 28.8 V), 500 mA max.				

*1: Indicates the values if the offset and gain are not adjusted.

*2: Indicates the values if the offset and gain are adjusted.

*3: Input conversion time = Delay caused by input filter (1 ms max.) + (50 μs × Number of channels used)
Delay time caused by the input filter peaks at 1 ms between -10 V and +10 V.

Note: Use a 24-VDC power supply and external input power supply with double or reinforced insulation.

● Analog Output Module (MTA2910)



Model: JEPMC-MTA2910-E
Approx. Mass : 300 g

Items		Specifications			
Analog Output	Analog Output Range	-10 V to +10 V	0 V to +10 V		
	Number of Channels	4			
	Number of Channels to be Used	1 to 4			
	Isolation	Between channels: Not isolated			
	Resolution	16 bits (-31276 to +31276)	15 bits (0 to +31276)		
	Maximum Allowable Load Current	±5 mA			
	Accuracy	25°C	±0.1% (±10 mV)		
		0°C to 55°C	±0.3% (±30 mV)		
Output Delay Time	1.2 ms (After change with a full scale of -10 V to +10 V.)				
Motion Network	Two circuits for MECHATROLINK-III Transmission distance: 20 cm to 100 m		Transmission speed: 100 Mbps Terminator: not required		
External Power Supply	24 VDC (19.2 V to 28.8 V), 500 mA max.				

Note: Use a 24-VDC power supply and external input power supply with double or reinforced insulation.

● Pulse Input Module (MTP2900)



Model : JEPMC-MTP2900-E
Approx. Mass : 300 g

Items		Specifications
Pulse Input	Number of Channels	2
	Input Circuit (Selected by software)	5-V differential: 4-MHz response frequency (RS-422, not isolated) 12 V: 120-kHz response frequency (12 V, 7 mA, current source mode input, and photocoupler isolation)
	Input Method	A/B (1, 2, or 4 multipliers), UP/DOWN (1 or 2 multipliers), and sign (1 or 2 multipliers)
	Counter Functions	Reversible counter, interval counter, and frequency measurement
	Maximum Frequency	4 MHz with 5-V differential input (16 MHz with 4 multipliers)
	Coincident Output	2 points, 24 V, 50 mA, current sink mode input, and photocoupler isolation
	DO Output	2 points, 24 V, 50 mA, current sink mode input, and photocoupler isolation (zone output, speed-coincidence output, and frequency-coincidence output)
	PI Latch Input	2 points, 24 V, source mode input, and photocoupler isolation
Input Method		Sign, UP/DOWN and A/B pulse
Motion Network		Two circuits for MECHATROLINK-III Transmission speed : 100 Mbps Transmission distance : 20 cm to 100 m Terminator : not required
External Power Supply		24 VDC (19.2 V to 28.8 V), 500 mA

● Pulse Output Module (MTP2910)



Model : JEPMC-MTP2910-E
Approx. Mass : 300 g

Items		Specifications
Pulse Output	Number of Controlled Axes	4
	Pulse Output	Output Method : CW/CCW, sign + pulse, and phase A/B Maximum Frequency : 4 Mpps with CW/CCW or sign + pulse, 1 Mpps with phase A/B (before multiplication) Interface : 5-V differential outputs
	Digital Input	5 points × 4 channels, source mode input DI_0 : Separate for each power supply... 5 V/3.9 mA, 12 V/10.9 mA, 24 V/4.1 mA DI_1 to DI_4: Power supply shared ... 24 V/4.1 mA
	Digital Output	4 points × 4 channels Open collector and sink mode output (24 V/100 mA)
Motion Network		Two circuits for MECHATROLINK-III Transmission speed : 100 Mbps Transmission distance : 20 cm to 100 m Terminator : not required
External Power Supply		24 VDC (19.2 V to 28.8 V), 500 mA

● Network Analyzer Module (MTNA-01)



Model: JEPMC-MT2010-E
Approx. Mass : 270 g

Traces the data sent or received through MECHATROLINK-III communication (cyclic communication).

Items	Specifications
External Power Supply	Input supply voltage: 24 VDC ±20% Current consumption: 1 A max. Inrush current : 40 A max.
Motion Network	Two circuits for MECHATROLINK-III (To be connected to the end of network connection.) Transmission speed: 100 Mbps (MECHATROLINK-III) Transmission distance: 20 cm to 100 m Terminator: not required
Communication Ports	1 port (Ethernet: 100BASE-TX/10BASE-T)

Note: Requires the network analyzer tool (model: CMPC-NWAN710) for settings and operation.

MECHATROLINK-II Compatible Modules

● 64-point I/O Modules (IO2310/IO2330)



Model: JEPMC-IO2310-E
Approx. Mass: 590 g



Model: JEPMC-IO2330-E
Approx. Mass: 590 g

Items	Specifications
I/O Signals	Input: 64 points, 24 VDC (20.4 V to 28.8 V), 5 mA, sink/source mode input Output: 64 points, 24 VDC (20.4 V to 28.8 V), 50 mA sink mode output (IO2310), source mode output (IO2330) Signal connection method: Connector (FCN360 series)
External Power Supply	24 VDC (20.4 V to 28.8 V) Rated current: 0.5 A, Inrush current: 1 A

● Various I/O Modules



Model: JEPMC-PL2900-E/PL2910-E,
JEPMC-AN2900-E/AN2910-E
Approx. Mass: 300 g



Model: JAMSC-IO2900-E/-IO2910-E,
JAMSC-IO2920-E/-IO2950-E
Approx. Mass: 300 g

Counter Module (PL2900)

Model	JEPMC-PL2900-E
Number of Input Channels	2
Functions	Pulse counter, notch output
Pulse Input Method	Sign (1/2 multipliers), A/B (1/2/4 multipliers), UP/DOWN (1/2 multipliers)
Max. Counter Speed	1200 kpps (4 multipliers)
Pulse Input Voltage	3/5/12/24 VDC
External Power Supply	For input signal: 24 VDC For driving load: 24 VDC For module: 24 VDC (20.4 V to 26.4 V) 150 mA max.

Pulse Output Module (PL2910)

Model	JEPMC-PL2910-E
Number of Output Channels	2
Functions	Pulse positioning, JOG run, zero-point return
Pulse Output Method	CW, CCW pulse, sign + pulse
Max. Output Speed	500 kpps
Pulse Output Voltage	5 VDC
Pulse Interface Circuit	Open collector output 5 VDC, 10 mA/circuit
External Control Signal	Digital input: 8 points/module 5 VDC × 4 points, 24 VDC × 4 points Digital output: 6 points/module 5 VDC × 4 points, 24 VDC × 2 points
External Power Supply	24 VDC (20.4 V to 26.4 V), 150 mA

Analog Input Module (AN2900)

Analog Output Module (AN2910)

Model	JEPMC-AN2900-E	JEPMC-AN2910-E
Number of Input/Output Channels	Input : 4	Output : 2
Input/Output Voltage Range	Input : -10 V to +10 V	Output : -10 V to +10 V
Input Impedance	1 MΩ min.	-
Max. Allowable Load Current	-	±5 mA (2 MΩ)
Data Region	-32000 to +32000	
Input/Output Delay Time	Input : 4 ms max.	Output : 1 ms max.
Error	+0.5% FS (at 25°C), ±1.0% FS (at 0°C to 60°C)	+0.2% FS (at 25°C), ±0.5% FS (at 0°C to 60°C)
External Power Supply	24 VDC (20.4 V to 26.4 V), 150 mA max.	24 VDC (20.4 V to 26.4 V), 180 mA max.

16-point Input Module (IO2900)

16-point Output Module (IO2910)

Model	JAMSC-IO2900-E	JAMSC-IO2910-E
Number of Input/Output Points	Input : 16	Output : 16
Rated Voltage	12/24 VDC	
Rated Current	2 mA/5 mA	0.3 A
Input/Output Method	Input : sink/source mode input	Output : sink mode output
External Power Supply	24 VDC (20.4 V to 26.4 V), 90 mA	24 VDC (20.4 V to 26.4 V), 110 mA

8-point I/O Module (IO2920)

Model	JAMSC-IO2920-E
Number of I/O Points	Input : 8, Output : 8
Rated Voltage	12/24 VDC
Rated Current	Input : 2 mA/5 mA Output : 0.3 A
Input/Output Method	Input : sink/source mode input Output : sink mode output
External Power Supply	24 VDC (20.4 V to 26.4 V), 70 mA

Relay Output Module (IO2950)

Model	JAMSC-IO2950-E
Number of Output Points	8
Rated Voltage	12/24 VDC, 100/200 VAC
Rated Current	1.0 A
Output Method	Contact output
External Power Supply	24 VDC (20.4 V to 26.4 V), 90 mA

● AnyWire DB Master Made by Anywire Corporation



Model: AFMP-01
Approx. Mass: 90 g

Items	Specifications			
Transmission Clock	7.8 kHz	15.6 kHz	31.3 kHz	62.5 kHz
Max. Transmission Distance	1 km	500 m	200 m	100 m
Transmission Protocol	Special protocol (Anywire Bus DB protocol) Note: Upper compatibility with UNI-WIRE protocol			
Max. Number of I/Os	Full triple mode: 2304 points (Bit-Bus: 256 points, Word-Bus: 2048 points) Full quadruple mode: 2560 points (Bit-Bus: 512 points, Word-Bus: 2048 points)			
Dual-Bus Function	Bit-Bus Full triple mode: 256 bits max., Full quadruple mode: 512 bits max. Word-Bus Full triple mode: 128 words max. (64 words each for IN and OUT), Full quadruple mode: 128 words max. (64 words each for IN and OUT)			
Max. Number of Stations	128 stations (Fan-out = 200) Note: Anywire DB products: Fan-in = 1, UNI-WIRE products: Fan-in = 10			
Connection Cable	General-purpose 2-wire cable or 4-wire cable (VCTF 0.75 sq to 1.25 sq) Special flat cable (0.75 sq), general purpose wire (0.75 sq to 1.25 sq)			

● CC-Link Interface Board Made by Anywire Corporation



Model: AFMP-02-C
Approx. Mass: 90 g



Model: AFMP-02-CA
Approx. Mass: 90 g

Items	Specifications	AFMP-02-C	AFMP-02-CA	
CC-Link Specifications	Station Type	Remote device station	●	●
	Number of Stations	4	●	●
	No. of Remote Stations	Station number setting range: 1 to 61 (4 stations are occupied after setting the number of stations)	●	●
	No. of Remote Device Points	Input: Max. 896 points, Output: Max. 896 points (Version 2.0 with 8 times setting) Input: Max. 112 points, Output: Max. 112 points (Version 1.1)	●	●
	No. of Remote Register Points	Input: Max. 128 points, Output: Max. 128 points (Version 2.0 with 8 times setting) Input: Max. 16 points, Output: Max. 16 points (Version 1.1)	●	●
	Transmission Speed	10 M, 5 M, 2.5 M, 625 k, and 156 kbps (Select with the switch.)	●	●
	Transmission Distance	100 m (10 Mbps), 160 m (5 Mbps), 400 m (2.5 Mbps), 900 m (625 kbps), and 1200 m (156 kbps)	●	●
	No. of CC-Link that can be connected	$(1 \times a) + (2 \times b) + (3 \times c) + (4 \times d) \leq 64$ [a: Number of slave products that occupy one station, b: Number of slave products that occupy two stations, c: Number of slave products that occupy three stations, d: Number of slave products that occupy four stations] $(16 \times A) + (54 \times B) + (88 \times C) \leq 2304$ [A: Number of remote I/O stations (Max. 64 units) B: Number of remote device station units (Max. 42 units) C: Number of local station and intelligent device station units (Max. 26 units)]	●	●
Connection Cable	CC-Link cable; a three-core, shielded, twisted-pair cable	●	●	
Anywire DB Specifications	Transmission Clock	7.8 kHz, 15.6 kHz, 31.3 kHz, and 62.5 kHz	–	●
	Max. Transmission Distance	Max. Overall Cable Extension Length: 100 m, 200 m, 500 m, or 1 km.	–	●
	I/O Points	Full triplex mode: Max. 2304 points (Bit-bus: Max. 256 points, Word-bus: Max. 2048 points) Full quadruplex mode: 2560 points (Bit-bus: Max. 512 points, Word-bus: Max. 2048 points)	–	●
	Anywire Bus Port	One port, detachable terminal block	–	●
	Connection Cable	General-purpose 2-core or 4-core cable (VCTF 0.75 sq to 1.25 sq), dedicated flat cable (0.75 sq), general-purpose wire (0.75 sq to 1.25 sq)	–	●

Other Manufacturer Modules

● HLS Master Module

Made by M-System Co., Ltd



Model: MPHLS-01
Approx. Mass: 70 g

Items	Specifications		
Transmission Protocol	Master and slave communications: polling		
	Full-duplex or half-duplex		
Connection Method	Multidrop connection (RS485)		
Transmission Speed	12 Mbps	6 Mbps	3 Mbps
Transmission Distance	100 m	200 m	300 m
Response Speed (with full-duplex)	4 stations	60.7 μ s	121.4 μ s
	8 stations	121.4 μ s	242.7 μ s
	16 stations	242.7 μ s	485.4 μ s
	32 stations	485.4 μ s	970.7 μ s
	63 stations	955.5 μ s	1.911 ms
Number of Slaves	1 to 63		
Max Number of Slave Points	Discrete input: 1008; discrete output: 1008		
Communication Connector	RJ-45 modular jack		
Terminator	Built-in, 100 Ω terminator		

● A-net/A-Link Master Unit Module

Made by Algo System Co., Ltd.



Model: MPANL00-0
Approx. Mass: 90 g

Items	A-net	A-Link
Communication Control IC	MKY40	MKY36
Communication Mode	Two-wire half duplex	Four-wire full duplex / two-wire half duplex
Transmission Speed	3/6/12 Mbps	3/6/12 Mbps
Error Detection	CRC-16	CRC-12
Transmission Distance	300/200/100 m	300/200/100 m

● CUnet Master Module

Made by Algo System Co., Ltd.



Model: MPCUNET-0
Approx. Mass: 85 g

Items	Specifications
Communication Control IC	MKY40 \times 1
Communication Mode	Two-wire, half-duplex (conforms to RS-485 specifications)
Isolation Method	Pulse transformer
Transmission Speed	3 Mbps, 6 Mbps, or 12 Mbps (recommended)
Synchronization Method	Bit synchronization
Error Detection	CRC-16
Max. Transmission Distance	12 Mbps: 100 m; 6 Mbps: 200 m; 3 Mbps: 300 m
Connection Method	Multidrop connection
Impedance	100 Ω
Terminator	Enabled or disabled with the built-in switch.
External Interface	Euro-style, 6-pin terminal block

● Image-processing Unit (MYVIS)

A networked machine vision system that processes images and takes into account the servo coordinate system with detection of the servo-axis position.



Model: JEVSA-YV260
Approx. Mass: 2.5 kg

Items		Standalone Type (Unit Type)	
		For Analog Cameras	For Camera Link
Model		JEVSA-YV260□1-E	JEVSA-YV260□2-E
Image Processing		Gray scale pattern matching, binary image analysis etc.	
CPU		Main CPU : SH-4A (600 MHz), Sub CPU : SH-2A (200 MHz)	
Image Processing Hardware	LSI	FPGA	
	Pre-processing Function	Inter-image operations (addition, averaging, subtraction, and difference operation), 3×3 filter, dilation/erosion	
Memory	Application Program	512 Kbytes (flash memory)	
	Backup Memory	256 Kbytes CMOS (for saving parameters)	
	Template Storage Memory	CF cards (2 Gbytes max.)	
	Image Memory	Frame Memory	4096×4096×8 bits×4 images (Can be used for 640×480×8 bits×192 images)
	Template Memory	16 Mbytes	
Image Input	Camera Interface	New EIAJ 12-pin connector ×4 VGA (640×480) to SXGA (1280×960), Four B&W, 8-bit A/D-converter circuits	CameraLink (MDR26pin) ×4 VGA (640×480) to QSXGA (2440×2048), Base Configuration, PoCL-compatible
	Camera Power Supply	Single camera : 12 V, 400 mA, Total : 1.2 A max.	
	Camera Sync Mode	Internal/external sync	Internal sync
	Random Shutter Supported	Sync-nonreset, sync-reset, single VD or V reset	
	Simultaneous Image Capture	Four cameras	
	Input Image Conversion	Gray level conversion (LUT), mirror mode	
Monitor	Monitor Output	VGA, XGA (color), 15pin D-sub	
	Image Display	A full-screen or a partial-screen for one camera, simultaneous screen reduction for two or four cameras, gray level conversion (binary image display supported)	
I/F	Field Network	MECHATROLINK-I / II	
	LAN (Ethernet)	10BASE-T/100BASE-TX	
	General-purpose Serial	RS-232C×2 channels (115.2 kbps)	
	Parallel I/O	16 general-purpose outputs (4 of these are also used for stroboscope) + 2 outputs exclusive for alarms (24 VDC, photocoupler isolation) 16 general-purpose inputs (4 of these are also used for trigger) + 3 inputs exclusive for mode switchings + 1 input exclusive for trigger (24 VDC, photocoupler isolation)	
	Track Ball	USB mouse	
External Power Supply		100 V/200 VAC, 24 VDC, 30 W	

● MECHATROLINK-II Repeater

Required to stabilize communication and to extend the total length of the cable.



Model: JEPMC-REP2000
Approx. Mass: 340 g


Items	Specifications
Communication Type	MECHATROLINK-II
Max. Cable Length	Between controller and repeater: 50 m, After repeater: 50 m
Max. Connected Stations	Total stations on both sides of repeater: 30*
Restrictions	<p>Total cable length ≤ 30 m: 15 stations max. 30 m < Total cable length ≤ 50 m: 14 stations max. 100 m max.</p>
External Power Supply	24 VDC (19.2 V to 28.8 V), 100 mA

*: Limited to the max. number of connectable stations of the controller (e.g., 21 stations for the MP2000 series).


MP3200

● Power Supply Unit

AC Power Supply Unit

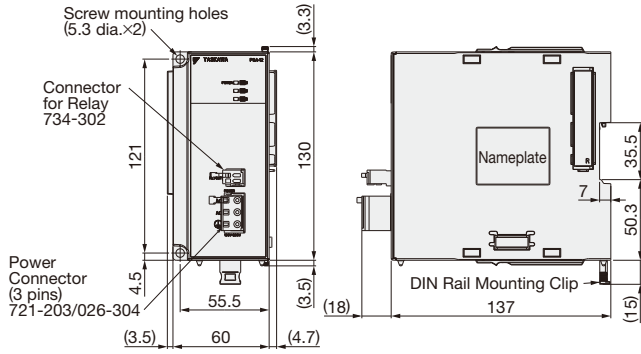


DC Power Supply Unit

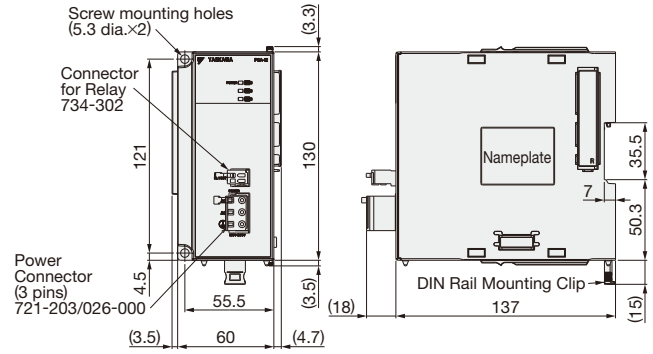


● CPU Unit


CPU-201 Unit



CPU-202 Unit




(Common)



● Vision Unit


(Common)




*: Connectors for MECHATROLINK-III

● Base Unit


3 Slots




5 Slots



8 Slots

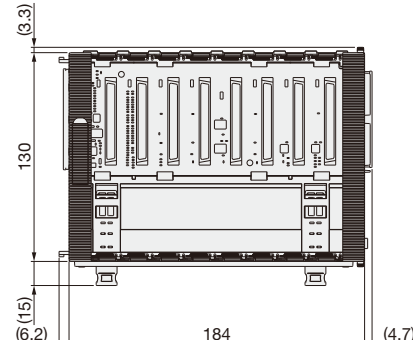


(Common)




MP2200 Base Units for Rack Expansion

● MBU-01, MBU-02

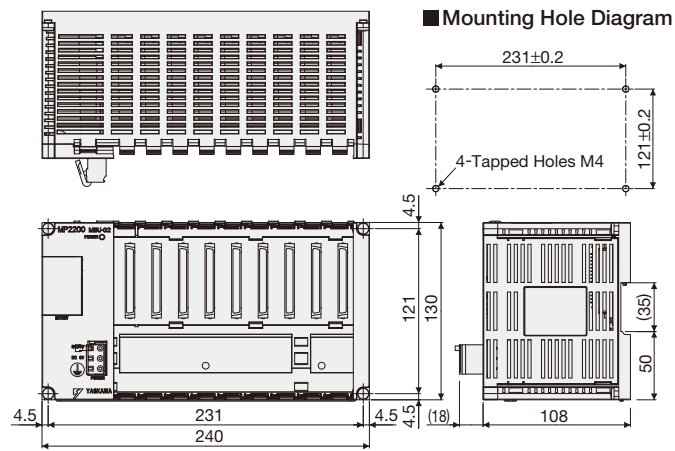


● MBU-03

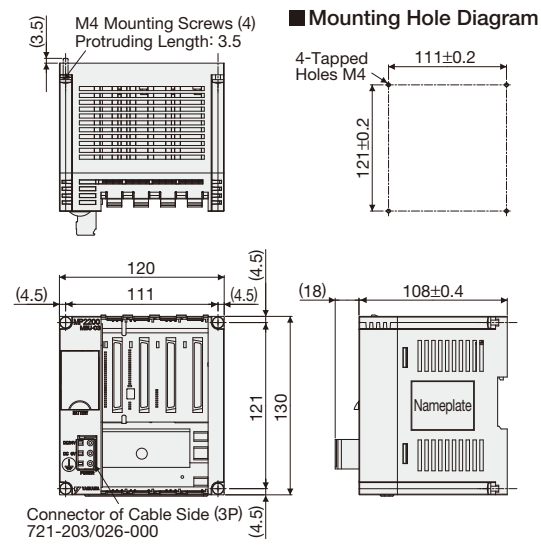


Optional Modules (Common)

● MECHATROLINK-III Compatible Module


64-point I/O Module

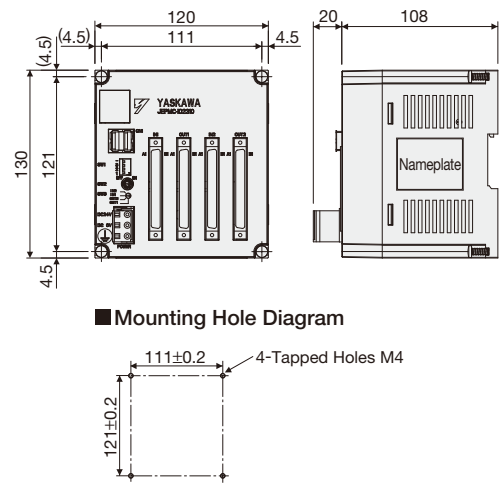


Hub Module

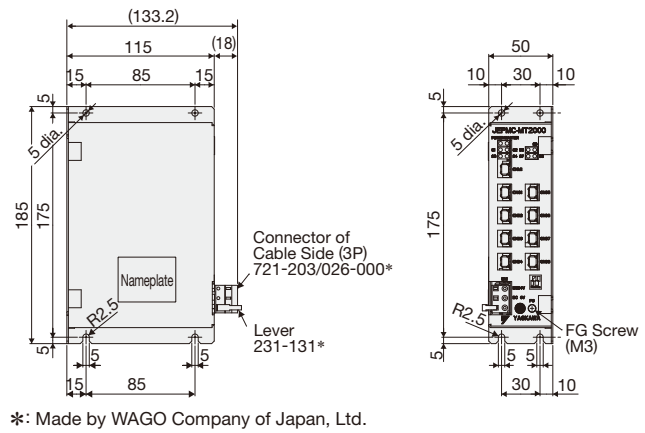


Analog Input Module

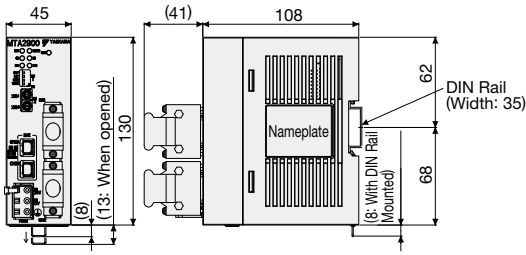


Analog Output Module

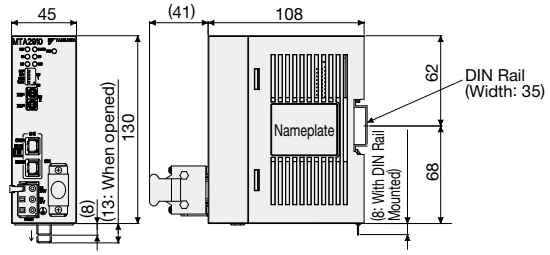


Pulse Input Module

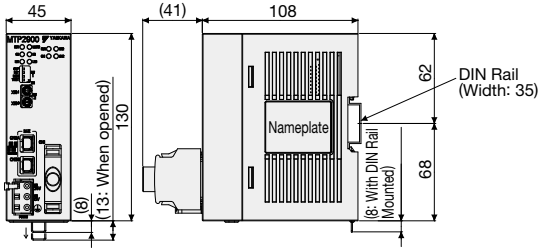


Pulse Output Module

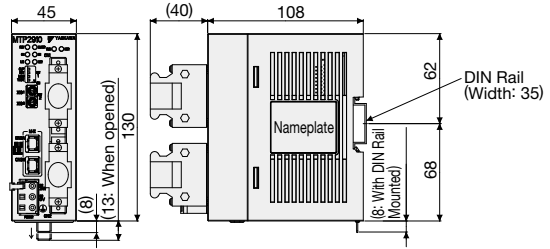

Gateway Module

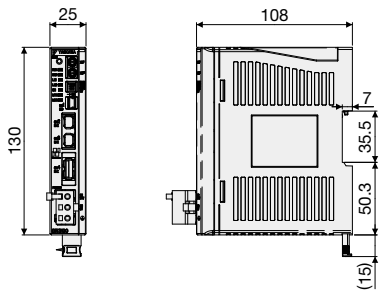


Network Analyzer Module




MECHATROLINK-II Compatible Module


64-point I/O Module

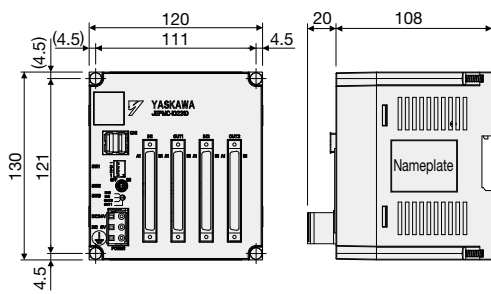


Mounting Hole Diagram




Counter, Pulse, and Analog Modules

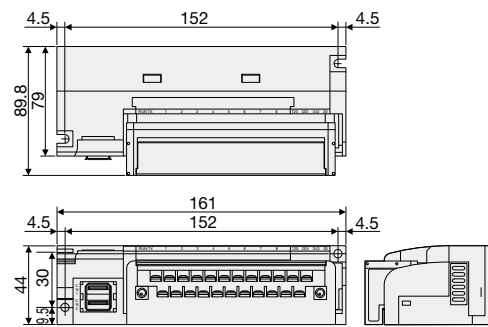

Mounting Hole Diagram (Two Methods)

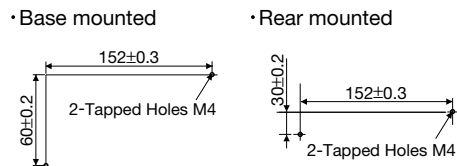

16-point/8-point I/O Module, Relay Output Module

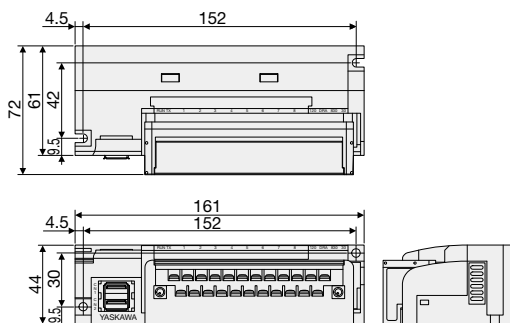

● Sequence Controls

Items	Specifications
Program Capacity	32 MB
Control Method	Sequence: High-speed and low-speed scan methods
Programming Language	Ladder language: Relay circuit Textual language: Numerical operations, logic operations, etc.
Scanning	2 scan levels : High-speed scan and low-speed scan High-speed scan time setting: 0.125 ms to 32 ms (Integral multiple of a MECHATROLINK communication cycle) Low-speed scan time setting : 2.0 ms to 300 ms (Integral multiple of a MECHATROLINK communication cycle)
User Drawings, Functions, and Motion Programs	Startup drawings (DWG.A) : 64 drawings max. Up to 3 hierarchical drawing levels High-speed scan process drawings (DWG.H): 1000 drawings max. Up to 3 hierarchical drawing levels Low-speed scan process drawings (DWG.L) : 2000 drawings max. Up to 3 hierarchical drawing levels Interrupt processing drawings (DWG.I) : 64 drawings max. Up to 3 hierarchical drawing levels Number of steps : Up to 4000 steps/drawing User functions : Up to 2000 functions Motion programs : Up to 512 Revision history of drawings and motion programs Security functions of drawings and motion programs
Data Memory	System (S) registers : 64 K words Common data (M) registers : 1 M words (battery backup) Common global registers (G) : 2 M words (no battery backup) Drawing local (D) registers : 16 K words Drawing constant (#) registers : 16 K words Input (I) registers : 64 K words (shared with output registers) Output (O) registers : 64 K words (shared with input registers) Constant (C) registers : 16 K words
Trace Memory	Data trace : 1 M words × 4 groups, 16 items/group defined
Memory Backup	Program memory : Flash memory (Battery backup for M registers)
Data Types	Bit (B) : 0.1 Integer (W) : -32,768 to +32,767 Double-length integer (L) : -2,147,483,648 to +2,147,483,647 Quadruple-length integer (Q) : -9,223,372,036,854,775,808 to 9,223,372,036,854,775,807 single-precision real number (F) : ± (1.175E-38 to 3.402E+38), 0 Double-precision real number (D): ± (2.225E-308 to 1.798E+308), 0 Address : 0 to 16777214
Register Designation Method	Register number : Direct designation of register number Symbolic designation: Up to 8 alphanumeric characters (up to 200 symbols/drawing) With automatic number or symbol assignment

● Motion Controls

Items	Specifications																				
Control Specifications	PTP control, interpolation, speed reference output, torque reference output, position reference output, phase reference output																				
Zero-point Return (17 types)	<table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">① DEC1+C</td> <td style="width: 25%;">② ZERO</td> <td style="width: 25%;">③ DEC1+ZERO</td> <td style="width: 25%;">④ C pulse</td> </tr> <tr> <td>⑤ DEC2+ZERO</td> <td>⑥ DEC1+LMT+ZERO</td> <td>⑦ DEC2+C</td> <td>⑧ DEC1+LMT+C</td> </tr> <tr> <td>⑨ C pulse only</td> <td>⑩ POT & C pulse</td> <td>⑪ POT only</td> <td>⑫ HOME LS & C</td> </tr> <tr> <td>⑬ INPUT</td> <td>⑭ HOME only</td> <td>⑮ NOT & C pulse</td> <td>⑯ NOT only</td> </tr> <tr> <td>⑰ INPUT & C pulse</td> <td colspan="3" style="text-align: right;">Note: Types ⑤ to ⑯ are available only with SVA.</td> </tr> </table>	① DEC1+C	② ZERO	③ DEC1+ZERO	④ C pulse	⑤ DEC2+ZERO	⑥ DEC1+LMT+ZERO	⑦ DEC2+C	⑧ DEC1+LMT+C	⑨ C pulse only	⑩ POT & C pulse	⑪ POT only	⑫ HOME LS & C	⑬ INPUT	⑭ HOME only	⑮ NOT & C pulse	⑯ NOT only	⑰ INPUT & C pulse	Note: Types ⑤ to ⑯ are available only with SVA.		
① DEC1+C	② ZERO	③ DEC1+ZERO	④ C pulse																		
⑤ DEC2+ZERO	⑥ DEC1+LMT+ZERO	⑦ DEC2+C	⑧ DEC1+LMT+C																		
⑨ C pulse only	⑩ POT & C pulse	⑪ POT only	⑫ HOME LS & C																		
⑬ INPUT	⑭ HOME only	⑮ NOT & C pulse	⑯ NOT only																		
⑰ INPUT & C pulse	Note: Types ⑤ to ⑯ are available only with SVA.																				
Number of Controlled Axes	1 to 32 axes (1 group)																				
Reference Unit	mm, inch, deg, pulse																				
Reference Unit Minimum Setting	1, 0.1, 0.01, 0.001, 0.0001, 0.00001																				
Coordinate System	Rectangular coordinates																				
Max. Programmable Value	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807 (signed 64-bit value)																				
Speed Reference Unit	mm/min, inch/min, deg/min, pulse/min, mm/s, inch/s, deg/s, pulse/s																				
Acceleration/Deceleration Type	Linear, asymmetric, S-curve																				
Override Function	Positioning : 0.01% to 327.67% by axis Interpolation: 0.01% to 327.67% by group																				
Programs	Language	Motion language, ladder language																			
	Number of Tasks	32 (Equal to the number of tasks that the ladder instruction, MSEE, can execute at the same time.)																			
	Number of Programs	Up to 512																			

● Hardware and Software Requirements

Item	Specifications
CPU	1 GHz or more recommended (manufactured by Intel or other companies)
Memory Capacity	1 Gbytes or more recommended*
Free Hard Disk Space	700 Mbytes or more (includes standard workspace memory after installation of MPE720)
Display	1280 × 800 pixels or more recommended
CD Drive	1 (only for installation)
Communication Port	RS-232C, Ethernet, MP2100 bus, or USB
OS	Windows 10, Windows 8, Windows 8.1, Windows 7 (32-bit, 64-bit)
.NET Environment	.NET Framework 4.5
Languages Supported	English, Japanese
Applicable Model	MP3200 and MP2000 series

*: Expand memory if other application programs are run simultaneously with MPE720 on the same computer.
Performance may be slow due to the use of memory by multiple application programs that are run simultaneously.

● Functions

Item	Specifications
Programming	Ladder programs (ladder language) Motion programs (motion language) Text format programming (position teaching)
Variables, Comments	Variable database management System and user variables, axis variables, input/output variables, global variables, system and user structures
Search, Replace	Cross-reference searches, instruction searches, character string and comment searches Register replacement, character string and comment replacement
Monitor	Register lists Watch Adjustment panel Axis operation monitor Axis alarm monitor Operation control panel
Tracing	Real-time tracing X-Y tracing Trace manager Data logging
MC-Configurator	Module configuration definitions (unit, module, slave allocation) Module detail definitions (system settings, communication settings, etc.) Parameter editing (fixed, setting, monitor, servo, distributed I/O, etc.) Servo adjustments (setup, test operation, tuning) Inverter adjustments (setup) Vision adjustments
Security Functions	Project file security Program security (ladder programs, motion programs) On-line security (access limited to users with specific levels of authority) User management
Servicing and Maintenance	Status list Maintenance monitor setting function
Project Conversion	Conversion of MP2000 project into MP3200 project
System	Language switching (between Japanese and English)
Remote Engineering	Modem connection RAS server connection
Electronic Cam Tool	Electronic cam data generation
Help	On-line manual help (help for instructions, operations) Version information
Printing	Preview Program Cross reference
Customized Functions	Editor Toolbar

● Instructions for Motion Programs

☐ : New instructions for MP3200

Type	Instruction	Function
Axis Setting Instructions	ABS	Absolute Mode
	INC	Incremental Mode
	ACC	Change Acceleration Time
	DCC	Change Deceleration Time
	SCC	Change S-curve Time Constant
	VEL	Set Speed
	FUT	Select Interpolation Feed Speed Units
	FMX	Set Maximum Interpolation Feed Speed
	IFP	Set Interpolation Feed Speed Ratio
	IUT	Select Interpolation Accel/decel Units
	IFMX	Set Maximum Interpolation Feed Speed per axis
	IAC	Change Interpolation Acceleration Time
	IDC	Change Interpolation Deceleration Time
	IDH	Change Interpolation Deceleration Time for Temporary Stop
	ACCMODE	Set Interpolation Acceleration/Deceleration Mode
Axis Movement Instructions	MOV	Positioning
	MVS	Linear Interpolation
	MCW	Clockwise: Circular Interpolation, Helical Interpolation
	MCC	Counterclockwise: Circular Interpolation, Helical Interpolation
	ZRN	Zero Point Return
	DEN	Position after Distribution
	SKP	Skip Function
	MVT	Set-time Positioning
	EXM	External Positioning
	POS	Set Current Position
Axis Control Instructions	MVM	Move on Machine Coordinates
	PLD	Update Program Current Position
	PFN	In-Position Check
	INP	In-Position Range
	PFP	Positioning Completed Check
	PLN	Coordinate Plane Setting
	Vision Instructions	VCAPI
VCAPS		Image Capture (With External Trigger Signal Sync)
VFIL		Pre-Processing
VANA		Image Analysis
VRES		Analysis Acquisition

Type	Instruction	Function
Program Control Instructions	IF, ELSE, IEND	Branching
	WHILE, WEND	Repetition
	WHILE, WENDX	Repetition with One Scan Wait
	PFORK, JOINTO, PJOINT	Parallel Execution
	SFORK, JOINTO, SJOINT	Selective Execution
	MSEE	Call Subprogram
	UFC	User Function
	END	Program End
	RET	Subprogram Return
	TIM	Dwell Time (10ms)
	TIM1MS	Dwell Time (1 ms)
	IOW	I/O Variable Wait
	EOX	One Scan Wait
	SNGD, SNGE	Disable Single-block Signal (SNGD) and Enable Single-block Signal (SNGE)
	Other Control Instructions	=
+, -, *, /, MOD		Numeric operations
++		Extended Add
--		Extended Subtract
, ^, &, !		Logic operations
SIN, COS, TAN, ASN, ACS, ATAN, SQRT, BIN, BCD		Basic functions
=, <>, >, <, >=, <=		Numeric comparison
SFR, SFL, BLK, CLR, ASCII		Data manipulation
SETW		Table Initialization
() , S{ } , R{ }		Others

● Instructions for Sequence Programs

Type	Instruction	Function
Control Instructions	SSEE	Sequence program call
	FUNC	User function call
Sequence Control Instructions	PON	Rising pulse
	NON	Falling pulse
	TON	Turn On Delay timer (10 ms)
	TON1MS	Turn On Delay timer (1 ms)
	TOF	Turn OFF Delay timer (10 ms)
	TOF1MS	Turn OFF Delay timer (1 ms)

● Instructions for Ladder Programs

: New instructions for MP3200

Type	Instruction	Function
Relay Circuit Instructions	NOC	NO Contact
	ONP-NOC	Rising-edge NO Contact
	OFFP-NOC	Falling-edge NO Contact
	NCC	NC Contact
	ONP-NCC	Rising-edge NC Contact
	OFFP-NCC	Falling-edge NC Contact
	TON (1 ms)	1-ms ON-Delay Timer
	TOFF (1 ms)	1-ms OFF-Delay Timer
	TON (10 ms)	10-ms ON-Delay Timer
	TOFF (10 ms)	10-ms OFF-Delay Timer
	TON (1 s)	1-s ON-Delay Timer
	TOFF (1 s)	1-s OFF-Delay Timer
	ON-PLS	Rising-edge Pulses
	OFF-PLS	Falling-edge Pulses
	COIL	Coil
	REV-COIL	Reverse Coil
	ONP-COIL	Rising-edge Detection Coil
	OFFP-COIL	Falling-edge Detection Coil
	S-COIL	Set Coil
	R-COIL	Reset Coil
Numeric Operation Instructions	STORE	Store
	ADD (+)	Add
	ADDX (++)	Extended Add
	SUB (-)	Subtract
	SUBX (--)	Extended Subtract
	MUL (x)	Multiply
	DIV (+)	Divide
	MOD	Integer Remainder
	REM	Real Remainder
	INC	Increment
	DEC	Decrement
	TMADD	Add Time
	TMSUB	Subtract Time
	SPEND	Spend Time
	INV	Invert Sign
	COM	One's Complement
	ABS	Absolute Value
	BIN	Binary Conversion
	BCD	BCD Conversion
	PARITY	Parity Conversion
	ASCII	ASCII Conversion 1
	BINASC	ASCII Conversion 2
	ASCBIN	ASCII Conversion 3

Type	Instruction	Function
Logic Operation Instructions	AND	AND
	OR	Inclusive OR
	XOR	Exclusive OR
	<	Less Than
	≤	Less Than or Equal
	=	Equal
	≠	Not Equal
	≥	Greater Than or Equal
	>	Greater Than
	RCHK	Range Check
Program Control Instructions	SEE	Call Sequence Subprogram
	MSEE	Call Motion Program
	FUNC	Call User Function
	INS	Direct Input String
	OUTS	Direct Output String
	XCALL	Call Extended Program
	WHILE END_WHILE	WHILE construct
	FOR END_FOR	FOR construct
	IF END_IF	IF construct
	IF ELSE END_IF	IF-ELSE construct
EXPRESSION	Numerical expressions	
Basic Function Instructions	SQRT	Square Root
	SIN	Sine
	COS	Cosine
	TAN	Tangent
	ASIN	Arc Sine
	ACOS	Arc Cosine
	ATAN	Arc Tangent
	EXP	Exponential
	LN	Natural Logarithm
	LOG	Common Logarithm

● Instructions for Ladder Programs (Cont'd)

□ : New instructions for MP3200

Type	Instruction	Function
Data Manipulation Instructions	ROTL	Bit Rotate Left
	ROTR	Bit Rotate Right
	MOVB	Move Bit
	MOVW	Move Word
	XCHG	Exchange
	SETW	Table Initialization
	BEXTD	Byte-to-word Expansion
	BPRESS	Word-to-byte Compression
	BSRCH	Binary Search
	SORT	Sort
	SHFTL	Bit Shift Left
	SHFTR	Bit Shift Right
	COPYW	Copy Word
	BSWAP	Byte Swap
DDC Instructions	DZA	Dead Zone A
	DZB	Dead Zone B
	LIMIT	Upper/Lower Limit
	PI	PI Control
	PD	PD Control
	PID	PID Control
	LAG	First-order Lag
	LLAG	Phase Lead Lag
	FGN	Function Generator
	IFGN	Inverse Function Generator
	LAU	Linear Accelerator/Decelerator 1
	SLAU	Linear Accelerator/Decelerator 2
	PWM	Pulse Width Modulation

Type	Instruction	Function
Table Manipulation Instructions	TBLBR	Read Table Block
	TBLBW	Write Table Block
	TBLSRL	Search Table Row
	TBLSRC	Search Table Column
	TBLCL	Clear Table Block
	TBLMV	Move Table Block
	QTBLR	Read Queue Table
	QTBLRI	Read Queue Table with Pointer Increment
	QTBLW	Write Queue Table
	QTBLWI	Write Queue Table with Pointer Increment
QTBLCL	Clear Queue Table Pointer	
Standard System Function Instructions	COUNTER	Counter
	FINFOUT	First-in First-out
	FLASH-OP	Flash memory operation
	TRACE	Trace
	DTRC-RD/DTRC-RDE	Read Data Trace
	ITRC-RD	Inverter trace read
	MSG-SND	Send Message
	MSG-SNDE	Send Message (Extension)
	MSG-RCV	Receive Message
	MSG-RCVE	Receive Message (Extension)
	ICNS-WR	Inverter constant write
	ICNS-RD	Inverter constant read
	MLNK-SVW	SERVOPACK constant write
	MLNK-SVR	SERVOPACK constant read
	MOTREG-W	Motion register write
	MOTREG-R	Motion register read
IMPORT/IMPORTL/ IMPORTLE	Import	
EXPORT/EXPORTL/ EXPORTLE	Export	

● EXPRESSION instructions

☐ : New instructions for MP3200

Type	Symbol	Function
Arithmetic Operators	+	Addition
	++	Extended Add
	-	Subtraction
	--	Extended Subtract
	*	Multiplication
	/	Division
	&	AND instruction (bit operation)
		OR instruction (bit operation)
Logical Operators	^	Exclusive OR instruction (bit operation)
	&&	AND instruction
		OR instruction
Comparison Operators	!	Logical NOT instruction
	<	Less than
	<=	Less than or equal
	==	Equal
	!=	Not equal
	>=	Greater than or equal
Assignment Operator	>	Greater than
	=	Store instruction
Program Control Instructions	FOR <variable> = <initial value> TO <final value> STEP <step value> ... FEND	Fixed count repetition control
	WHILE <conditional expression> ... WEND	Pre-tested repetition control
	IF<conditional expression> ... ELSE ... IEND	Conditional branching

Type	Symbol	Function
Basic Function Instructions	SQRT	Square root instructions
	SQRT_W	
	SQRT_F	
	SQRT_D	
	SIN	Sine instructions (real number operations)
	SIN_W	
	SIN_F	
	SIN_D	
	COS	Cosine instructions (real number operations)
	COS_W	
	COS_F	
	COS_D	
	TAN	Tangent instruction
	ASIN	Arc sine instruction
	ASIN_W	
ASIN_F		
ASIN_D		
ACOS	Arc cosine instruction	
ATAN	Arc tangent instructions (real number operation)	
ATAN_W		
ATAN_F		
ATAN_D		
ABS	Absolute value instruction	
Cast Operators	EXP	Exponential instruction
	LN	Natural logarithm instruction
	LOG	Common logarithm instruction
	(WORD)	word
	(LONG)	long
	(QUAD)	quad
	(FLOAT)	float
	(DOUBLE)	double
	FTYPE	Float-type operation specification
DTYPE	Double-type operation specification	

● Electronic Cam Data Generation Tool

Items	Specifications
Data Generation	Cam curves can be selected from: <ul style="list-style-type: none"> · Straight line · Cycloid · Modified constant velocity · Trapezoid · Single-dwell modified trapezoid m=1 · Single-dwell modified sine · No-dwell modified trapezoid · Free-form curve · Inverted paired strings · Parabolic · Modified trapezoid · Asymmetrical cycloid · Single-dwell cycloid m=1 · Single-dwell ferguson trapezoid · Single-dwell trapezoid · No-dwell modified constant velocity · Inverted trapezoid · Simple harmonic · Modified sine · Asymmetrical modified trapezoid · Single-dwell cycloid m=2/3 · Single-dwell modified trapezoid m=2/3 · No-dwell simple harmonic · NC2 curve · Paired strings
Data Editing	Data graph: Parameter setting, style setting, graph data editing Data list: Insert, delete, etc. Control graph display: Displacement data, speed data, acceleration data, jerk data, graph comparison
Data Transfer	Cam data file is transferred to registers (M or C)

● MP3200 Main Units

Classifications	Products	Model Name	Model	Specifications	Qty
MP3200	Power Supply Unit	PSA-12	JEPMC-PSA3012-E	AC power supply unit (85 to 276 VAC input)	
		PSD-12	JEPMC-PSD3012-E	DC power supply unit (24 VDC input)	
	CPU Unit	CPU-201	JEPMC-CP3201-E	High-speed scan time setting: Min. 125 μ s Communication cycle*1 : 250 μ s (CPU-201), 125 μ s (CPU-202)	
		CPU-202	JEPMC-CP3202-E	Program capacity: 32 MB Battery (JEPMC-OP3005) for backup data is included.	
	Rack Expansion Interface Unit	EXU-001	JEPMC-EXU3001-E	For main rack	
		EXU-002	JEPMC-EXU3002-E	For Expansion rack	
	Base Unit	MBU-B03	JEPMC-BUB3003-E	3-slot base unit for optional modules	
		MBU-B05	JEPMC-BUB3005-E	5-slot base unit for optional modules	
		MBU-B08	JEPMC-BUB3008-E	8-slot base unit for optional modules	
	MP2200 base unit	MBU-01	JEPMC-BU2200-E	100 VAC/200 VAC input base unit (9 slots)	
		MBU-02	JEPMC-BU2210-E	24 VDC input base unit (9 slots)	
		MBU-03	JEPMC-BU2220-E	24 VDC input base unit (4 slots)	
Option Unit	Vision Unit*2	YVD-001	JEPMC-YVD3001-E	High-performance vision unit	

*1: The cycle in which the MP3200 creates and sends references.

*2: Estimates are required before ordering this product. Contact your Yaskawa representative for more information.

● Optional modules for MP3000 and MP2000

Classifications	Products	Model Name	Model	Specifications	Qty
Connection Module	Expansion interface module*1	EXIOIF	JAPMC-EX2200-E	Expansion interface	
CPU Module	Multiple-CPU module	MPU-01	JAPMC-CP2700-E	MECHATROLINK-III \times 1, Program memory 11.5MB	
Motion Modules	Motion module	SVC-01	JAPMC-MC2320-E	1 channel for MECHATROLINK-III	
	Analog motion module	SVB-01	JAPMC-MC2310-E	1 channel for MECHATROLINK-II	
	Pulse output motion module	SVA-01	JAPMC-MC2300-E	Analog-output 2-axis servo control	
Communication Modules	General-purpose serial communication module	PO-01	JAPMC-PL2310-E	Pulse-output, 4-axis servo control	
	Ethernet communication module	217IF-01	JAPMC-CM2310-E	RS-232C/RS-422 communication	
		218IF-01	JAPMC-CM2300-E	RS-232C/Ethernet communication	
	DeviceNet communication module	218IF-02	JAPMC-CM2302-E	RS-232C/Ethernet (100 Mbps) communications	
		260IF-01	JAPMC-CM2320-E	RS-232C/DeviceNet communication	
	PROFIBUS communication module	261IF-01	JAPMC-CM2330-E	RS-232C/PROFIBUS communication	
	FL-net communication module	262IF-01	JAPMC-CM2303-E	Cyclic transmission and message transmission	
	EtherNet / IP communication module	263IF-01	JAPMC-CM2304-E	I/O transmission and Explicit message transmission	
	EtherCAT communication module	264IF-01	JAPMC-CM2305-E	As a slave station of EtherCAT	
	CompoNet communication module	265IF-01	JAPMC-CM2390-E	CompoNet communication	
	PROFINET communication module	266IF-01*2	JAPMC-CM2306-E	PROFINET master	
		266IF-02	JAPMC-CM2307-E	PROFINET slave	
	CC-Link IE Field Slave Module	269IF-01	JAPMC-CM2308-E	CC-Link IE Field slave	
MPLINK communication module	215AIF-01	JAPMC-CM2360-E	RS-232C/MPLINK communication		
CP-215 communication module	MPLINK				
	215AIF-01	JAPMC-CM2361	RS-232C/CP-215 communication		
I/O Modules	I/O module	LIO-01	JAPMC-IO2300-E	16-point input, 16-point output (sink mode output), pulse input: 1 channel	
		LIO-02	JAPMC-IO2301-E	16-point input, 16-point output (source mode output), pulse input: 1 channel	
		LIO-04	JAPMC-IO2303-E	32-point input and 32-point output (sink mode output)	
		LIO-05	JAPMC-IO2304-E	32-point input and 32-point output (source mode output)	
		LIO-06	JAPMC-IO2305-E	Digital input: 8 points, digital output: 8 points, analog input: 1 channel, analog output: 1 channel, pulse counter: 1 channel	
		Output module	DO-01	JAPMC-DO2300-E	64-point output (sink mode output)
	Analog input module	AI-01	JAPMC-AN2300-E	8 channels for analog input	
	Analog output module	AO-01	JAPMC-AN2310-E	4 channels for analog output	
Counter module	CNTR-01	JAPMC-PL2300-E	2 channels, selection of 2 input circuits: 5-V differential or 12 V.		

*1: Connect the Expansion Interface Module to the MP2200 Base Unit for Rack Expansion.

*2: Estimates are required before ordering this product. Contact your Yaskawa representative for more information.

(Cont' d)






● Optional modules for MP3000 and MP2000 (Cont'd)

Classifications	Products	Model Name	Model	Specifications	Qty
MECHATROLINK-III Compatible Modules	64-point I/O module	MTD2310	JEPMC-MTD2310-E	64-point input and 64-point output (sink mode output)	
	Analog input module	MTA2900	JEPMC-MTA2900-E	Analog input: 8 channels	
	Analog output module	MTA2910	JEPMC-MTA2910-E	Analog output: 4 channels	
	Pulse input module	MTP2900	JEPMC-MTP2900-E	Pulse input: 2 channels	
	Pulse output module	MTP2910	JEPMC-MTP2910-E	Pulse output: 4 channels	
	Hub module	HUB	JEPMC-MT2000-E	-	
	MECHATROLINK compatible gateway module	GW3100	JEPMC-GW3100-E	MECHATROLINK-III×2 MECHATROLINK-II×1	
	Network analyzer module	MTNA-01	JEPMC-MT2010-E	-	
MECHATROLINK-II Compatible Modules	64-point I/O module	IO2310	JEPMC-IO2310-E	64-point input and 64-point output (sink mode output)	
		IO2330	JEPMC-IO2330-E	64-point input and 64-point output (source mode output)	
	Counter module	PL2900	JEPMC-PL2900-E	Reversible counter: 2 channels	
	Pulse output module	PL2910	JEPMC-PL2910-E	Pulse output: 2 channels	
	Analog input module	AN2900	JEPMC-AN2900-E	Analog input: -10 V to +10 V, 4 channels	
	Analog output module	AN2910	JEPMC-AN2910-E	Analog output: -10 V to +10 V, 2 channels	
	16-point input module	IO2900	JAMSC-IO2900-E	16-point input	
	16-point output module	IO2910	JAMSC-IO2910-E	16-point output (sink mode output)	
	8-point I/O module	IO2920	JAMSC-IO2920-E	8-point input and 8-point output (sink mode output)	
Relay output module	IO2950	JAMSC-IO2950-E	8 contact outputs		

● Support Tool

Classifications	Products	Model Name	Model	Specifications	Qty
System Integrated Engineering Tool	MPE720 Version 7	-	CPMC-MPE780D	Engineering tool for MP3200 Controller OS: Windows 10/8/8.1/7	









● Cables and Connectors

Name	Model	Length m	Specifications	Qty
Rack Expansion Interface Unit Cable	JEPMC-W3401-A5-E	0.5	With connectors on both ends 	
	JEPMC-W3401-2A5-E	2.5		
	JEPMC-W3401-06-E	6.0		
EXIOIF Module Cable*	JEPMC-W2094-A5-E	0.5	With connectors on both ends 	
	JEPMC-W2094-01-E	1.0		
	JEPMC-W2094-2A5-E	2.5		
Cable for MECHATROLINK-III	JEPMC-W6012-A2-E	0.2	With MECHATROLINK-III connectors on both ends 	
	JEPMC-W6012-A5-E	0.5		
	JEPMC-W6012-01-E	1.0		
	JEPMC-W6012-02-E	2.0		
	JEPMC-W6012-03-E	3.0		
	JEPMC-W6012-05-E	5.0		
	JEPMC-W6012-10-E	10.0		
	JEPMC-W6012-20-E	20.0		
	JEPMC-W6012-30-E	30.0		
	JEPMC-W6012-50-E	50.0		
	JEPMC-W6013-10-E	10.0	With ferrite core 	
	JEPMC-W6013-20-E	20.0		
	JEPMC-W6013-30-E	30.0		
	JEPMC-W6013-50-E	50.0		
	JEPMC-W6013-75-E	75.0		
	JEPMC-W6014-A5-E	0.5	With a connector on the controllers end 	
	JEPMC-W6014-01-E	1.0		
	JEPMC-W6014-03-E	3.0		
	JEPMC-W6014-05-E	5.0		
	JEPMC-W6014-10-E	10.0		
JEPMC-W6014-30-E	30.0			
JEPMC-W6014-50-E	50.0			









*: You cannot use an MP2000-series EXIOIF Module Cable (model: JEPMC-W2091-□□(□)).

(Cont'd)

● Cables and Connectors (Cont'd)

Name	Model	Length m	Specifications	Qty	
Cable for MECHATROLINK-II and MPLINK	JEPMC-W6002-A5-E	0.5	With connectors on both ends 		
	JEPMC-W6002-01-E	1.0			
	JEPMC-W6002-03-E	3.0			
	JEPMC-W6002-05-E	5.0			
	JEPMC-W6002-10-E	10.0			
	JEPMC-W6002-20-E	20.0			
	JEPMC-W6002-30-E	30.0			
	JEPMC-W6002-40-E	40.0			
	JEPMC-W6002-50-E	50.0			
	JEPMC-W6003-A5-E	0.5		With ferrite core 	
	JEPMC-W6003-01-E	1.0			
	JEPMC-W6003-03-E	3.0			
	JEPMC-W6003-05-E	5.0			
	JEPMC-W6003-10-E	10.0			
	JEPMC-W6003-20-E	20.0			
	JEPMC-W6003-30-E	30.0			
JEPMC-W6003-40-E	40.0				
JEPMC-W6003-50-E	50.0				
Terminator	JEPMC-W6022-E	-	For MECHATROLINK-II 		
Ferrite Core	JEPMC-W6021	-	For MECHATROLINK-II/-III cable 		
Connection Cable for SVA-01	JEPMC-W2040-A5-E	0.5	With connectors on both ends 		
	JEPMC-W2040-01-E	1.0			
	JEPMC-W2040-03-E	3.0			
	JEPMC-W2041-A5-E	0.5	With a connector on the controller end 		
	JEPMC-W2041-01-E	1.0			
	JEPMC-W2041-03-E	3.0			
RS-232C Communication Cable (217IF-01, 218IF-01, 260IF-01, 261IF-01, and 215AIF-01)	JEPMC-W5311-03-E	2.5	Connection cable for MPE720-installed PC  PC side: D-sub, 9-pin, and female Communication module side: D-sub, 9-pin, and male		
	JEPMC-W5311-15-E	15.0			
RS-232C Communication Cable for 266IF-01	JEPMC-W2010-03-E	3.0	Serial cable to connect the PC.  PC end: D-sub, 9-pin, and female Motion-board end		
	JEPMC-W2010-05-E	5.0			
	JEPMC-W2010-15-E	15.0			
RS-422/485 Communication Cable for 217IF-01	No ready-made cable available. Prepare a cable that meets these specifications. : Connector : 10114-3000PE made by 3M Japan Ltd. Shell : 10314-52A0-008 made by 3M Japan Ltd. Cable : Max. length 300 m, shielded (Use shielded cable and a modem to reduce noise.)				
Ethernet Communication Cable for 218IF-01	Use 10Base-T cross or straight cables.				
Ethernet Communication Cable for 218IF-02	Use 100Base-TX cross or straight cables.				
DeviceNet Communication Cable for 260IF-01	Use DeviceNet cables. Refer to the ODVA web site. (http://www.odva.org/)				
PROFIBUS Communication Cable for 261IF-01	Use PROFIBUS cables. Refer to the PROFIBUS web site (http://www.profibus.jp/). Make sure the cable outlet position and direction so that it will not stand in the way of the RS-232C connector connection when selecting a cable.				
CC-Link IE Field Communication Cable for 269IF-01	No ready-made cable available. Prepare a recommended cable for CC-Link IE Field.: Cable: IEEE802.3 1000BASE-T standard cable We recommend a flat 4-pair double-shielded cable that conforms with ANSI/TIA/EIA-568-B (Category 5e). Connector: Shielded RJ-45				

● Cables and Connectors (Cont' d)

Name	Model	Length m	Specifications	Qty
CP-215 Communication Cable for 215AIF-01	No ready-made cable available. Prepare a cable that meets these specifications.: Wire : YS-IPEV-SB (75Ω) or YS-IPEV-S (77Ω) made by Fujikura Ltd. Connector on module end : MR-8RFA4 (G) made by Honda Tsushin Kogyo, Co., Ltd. Connector on cable end : MR-8M (G) made by Honda Tsushin Kogyo, Co., Ltd.			
I/O Cable for LIO-01 and LIO-02	JEPMC-W2061-A5-E	0.5	With a connector on the LIO-01/-02 end 	
	JEPMC-W2061-01-E	1.0		
	JEPMC-W2061-03-E	3.0		
I/O Cable for MP3100/MP2100	JEPMC-W2062-A5-E	0.5	With a connector on the MP3100/MP2100 end. 	
	JEPMC-W2062-01-E	1.0		
	JEPMC-W2062-03-E	3.0		
I/O Cable for IO2310, IO2330, and MTD2310	JEPMC-W5410-05-E	0.5	With a connector on the IO2310/IO2330/MTD2310 end 	
	JEPMC-W5410-10-E	1.0		
	JEPMC-W5410-30-E	3.0		
I/O Cable for LIO-04, LIO-05, DO-01, and PO-01	JEPMC-W6060-05-E	0.5	With a connector on the LIO-04/LIO-05/DO-01 end 	
	JEPMC-W6060-10-E	1.0		
	JEPMC-W6060-30-E	3.0		
I/O cable for LIO-06	JEPMC-W2064-A5-E	0.5	With a connector on the LIO-06 end, 50 pins (With shielded wire) 	
	JEPMC-W2064-01-E	1.0		
	JEPMC-W2064-03-E	3.0		
Input Cable for AI-01	JEPMC-W6080-05-E	0.5	With a connector on the AI-01 end 	
	JEPMC-W6080-10-E	1.0		
	JEPMC-W6080-30-E	3.0		
Output Cable for AO-01	JEPMC-W6090-05-E	0.5	With a connector on the AO-01 end 	
	JEPMC-W6090-10-E	1.0		
	JEPMC-W6090-30-E	3.0		
I/O Cable for CNTR-01	JEPMC-W2063-A5-E	0.5	With a connector on the CNTR-01 end 	
	JEPMC-W2063-01-E	1.0		
	JEPMC-W2063-03-E	3.0		




● Optional Products

Applicable Unit	Product Name	Product Model	Specifications	Qty
CPU Unit	Battery	JEPMC-OP3005	Supplied power to a calendar and backup memory when the power to the CPU unit is turned OFF.	
CPU Unit	Rack Support Bracket	JEPMC-OP3006-E	Used to mount a Sub-CPU Module on the Main Rack with screws (75 mm).	
CPU Unit	Rack Support Bracket	JEPMC-OP3007-E	Used to mount a Sub-CPU Module on the Main Rack with screws (130 mm).	
Basic Units	Attachment for mounting screws	JEPMC-OP3001-E	Used to mount a unit with screws	
MECHATROLINK-II and MECHATROLINK-III Compatible Modules	DIN rail mounting parts	JEPMC-OP300	Used to mount the IO2310, IO2330, or MTD2310 Modules on the DIN rail (1 pair in a set).	
Base Unit	Protective cover	JEPMC-OP2300	Front cover for unused slot	

International Standards




● MP3200 Main Units

● : Certified, ○ : Complied

Classifications	Products	Model Name	Model	UL Standards	EU Directive	KC Mark
						
MP3200	Power Supply Unit	PSA-12	JEPMC-PSA3012-E	●	○	○
		PSD-12	JEPMC-PSD3012-E	●	○	○
	CPU Unit	CPU-201	JEPMC-CP3201-E	●	○	○
		CPU-202	JEPMC-CP3202-E	●	○	○
	Rack Expansion Interface Unit	EXU-001	JEPMC-EXU3001-E	●	○	○
		EXU-002	JEPMC-EXU3002-E	●	○	○
	Base Unit	MBU-B03	JEPMC-BUB3003-E	●	○	○
		MBU-B05	JEPMC-BUB3005-E	●	○	○
		MBU-B08	JEPMC-BUB3008-E	●	○	○
	Vision Unit	YVD-001	JEPMC-YVD3001-E	●	○	○

● Optional Modules (Common for MP3000 and MP2000)




● : Certified, ○ : Complied

Classifications	Products	Model Name	Model	UL Standards	EU Directive	KC Mark
						
CPU Module	Multiple-CPU module	MPU-01	JAPMC-CP2700-E	●	○	○
Connection Module	Expansion interface module	EXIOIF	JAPMC-EX2200-E	●	○	○
Motion Modules	Motion Module	SVC-01	JAPMC-MC2320-E	●	○	○
		SVB-01	JAPMC-MC2310-E	●	○	○
	Analogue motion module	SVA-01	JAPMC-MC2300-E	●	○	○
	Pulse output motion module	PO-01	JAPMC-PL2310-E	●	○	○
Communication Modules	General-purpose serial communication module	217IF-01	JAPMC-CM2310-E	●	○	○
	Ethernet communication module	218IF-01	JAPMC-CM2300-E	●	○	○
		218IF-02	JAPMC-CM2302-E	●	○	○
	DeviceNet communication module	260IF-01	JAPMC-CM2320-E	●	○	○
	PROFIBUS communication module	261IF-01	JAPMC-CM2330-E	●	○	○
	FL-net communication module	262IF-01	JAPMC-CM2303-E	●	○	○
	EtherNet / IP communication module	263IF-01	JAPMC-CM2304-E	●	○	○
	EtherCAT communication module	264IF-01	JAPMC-CM2305-E	●	○	○
	CompoNet communication module	265IF-01	JAPMC-CM2390-E	●	○	○
	PROFINET communication module	266IF-01	JAPMC-CM2306-E	●	○	○
		266IF-02	JAPMC-CM2307-E	●	○	○
	CC-Link IE Field Slave Module	269IF-01	JAPMC-CM2308-E	●	○	○
MPLINK communication module	215AIF-01 MPLINK	JAPMC-CM2360-E	●	○	○	

(Cont' d)

● Optional Modules (Common for MP3000 and MP2000) (Cont'd)

●: Certified, ○: Complied

Classifications	Products	Model Name	Model	UL Standards	EU Directive	KC Mark
						
I/O Modules	I/O module	LIO-01	JAPMC-IO2300-E	●	○	○
		LIO-02	JAPMC-IO2301-E	●	○	○
		LIO-04	JAPMC-IO2303-E	●	○	○
		LIO-05	JAPMC-IO2304-E	●	○	○
		LIO-06	JAPMC-IO2305-E	●	○	○
	Output module	DO-01	JAPMC-DO2300-E	●	○	○
	Analog input module	AI-01	JAPMC-AN2300-E	●	○	○
	Analog output module	AO-01	JAPMC-AN2310-E	●	○	○
Counter module	CNTR-01	JAPMC-PL2300-E	●	○	○	
MECHATROLINK-III Compatible Modules	Hub module	HUB	JEPMC-MT2000-E	●	○	○
	MECHATROLINK compatible gateway module	GW3100	JEPMC-GW3100-E	●	○	○
	64-point I/O module	MTD2310	JEPMC-MTD2310-E	●	○	○
	Analog input module	MTA2900	JEPMC-MTA2900-E	●	○	○
	Analog output module	MTA2910	JEPMC-MTA2910-E	●	○	○
	Pulse input module	MTP2900	JEPMC-MTP2900-E	●	○	○
	Pulse output module	MTP2910	JEPMC-MTP2910-E	●	○	○
	Network analyzer module	MTNA-01	JEPMC-MT2010-E	●	○	○
MECHATROLINK-II Compatible Modules	64-point I/O module	IO2310	JEPMC-IO2310-E	●	○	○
		IO2330	JEPMC-IO2330-E	●	○	○
	Counter module	PL2900	JEPMC-PL2900-E	●	○	○
	Pulse output module	PL2910	JEPMC-PL2910-E	●	○	○
	Analog input module	AN2900	JEPMC-AN2900-E	●	○	○
	Analog output module	AN2910	JEPMC-AN2910-E	●	○	○

Read Before Ordering

(1) Details of Warranty

■ Warranty Period

The warranty period for a product that was purchased (hereinafter called the “delivered product”) is one year from the time of delivery to the location specified by the customer or 18 months from the time of shipment from the Yaskawa factory, whichever is sooner.

■ Warranty Scope

Yaskawa shall replace or repair a defective product free of charge if a defect attributable to Yaskawa occurs during the above warranty period.

This warranty does not cover defects caused by the delivered product reaching the end of its service life and replacement of parts that require replacement or that have a limited service life.

This warranty does not cover failures that result from any of the following causes.

1. Improper handling, abuse, or use in unsuitable conditions or in environments not described in product catalogs or manuals, or in any separately agreed-upon specifications
2. Causes not attributable to the delivered product itself
3. Modifications or repairs not performed by Yaskawa
4. Use of the delivered product in a manner in which it was not originally intended
5. Causes that were not foreseeable with the scientific and technological understanding at the time of shipment from Yaskawa
6. Events for which Yaskawa is not responsible, such as natural or human-made disasters

(2) Limitations of Liability

1. Yaskawa shall in no event be responsible for any damage or loss of opportunity to the customer that arises due to failure of the delivered product.
2. Yaskawa shall not be responsible for any programs (including parameter settings) or the results of program execution of the programs provided by the user or by a third party for use with programmable Yaskawa products.
3. The information described in product catalogs or manuals is provided for the purpose of the customer purchasing the appropriate product for the intended application. The use thereof does not guarantee that there are no infringements of intellectual property rights or other proprietary rights of Yaskawa or third parties, nor does it construe a license.
4. Yaskawa shall not be responsible for any damage arising from infringements of intellectual property rights or other proprietary rights of third parties as a result of using the information described in catalogs or manuals.

(3) Suitability for Use

1. It is the customer’s responsibility to confirm conformity with any standards, codes, or regulations that apply if the Yaskawa product is used in combination with any other products.
2. The customer must confirm that the Yaskawa product is suitable for the systems, machines, and equipment used by the customer.
3. Consult with Yaskawa to determine whether use in the following applications is acceptable. If use in the application is acceptable, use the product with extra allowance in ratings and specifications, and provide safety measures to minimize hazards in the event of failure.
 - Outdoor use, use involving potential chemical contamination or electrical interference, or use in conditions or environments not described in product catalogs or manuals
 - Nuclear energy control systems, combustion systems, railroad systems, aviation systems, vehicle systems, medical equipment, amusement machines, and installations subject to separate industry or government regulations
 - Systems, machines, and equipment that may present a risk to life or property
 - Systems that require a high degree of reliability, such as systems that supply gas, water, or electricity, or systems that operate continuously 24 hours a day
 - Other systems that require a similar high degree of safety
4. Never use the product for an application involving serious risk to life or property without first ensuring that the system is designed to secure the required level of safety with risk warnings and redundancy, and that the Yaskawa product is properly rated and installed.
5. The circuit examples and other application examples described in product catalogs and manuals are for reference. Check the functionality and safety of the actual devices and equipment to be used before using the product.
6. Read and understand all use prohibitions and precautions, and operate the Yaskawa product correctly to prevent accidental harm to third parties.

(4) Specifications Change

The names, specifications, appearance, and accessories of products in product catalogs and manuals may be changed at any time based on improvements and other reasons. The next editions of the revised catalogs or manuals will be published with updated code numbers. Consult with your Yaskawa representative to confirm the actual specifications before purchasing a product.

Product Information

- **e-Mecha Site (<http://www.e-mechatronics.com/en/>)**

To see details on Yaskawa's controllers, click Controllers on Yaskawa's Products and Technical Information website.

Users can download catalogs, manuals, and dimensional drawings from the e-mechatronics website.

Note: Users must register as members to use some of these documents.



MP3200 product information of e-Mecha site

Third-party Trademarks in this Catalog

- Ethernet is a registered trademark of the Xerox Corporation.
- Windows is a trademark or registered trademark of the Microsoft Corporation.
- CompactFlash is a registered trademark of the SanDisk Corporation, and the CompactFlash and CF logos and trademarks are licensed at no charge and royalty-free to CompactFlash Association (CFA) members.
- MECHATROLINK is the trademark of MECHATROLINK Members Association.
- Camera Link is a registered trademark of the Automated Imaging Association (AIA).

This catalog may contain other proprietary names and copyright notices.

Trademark symbols (TM and ®) do not appear with product or company names in this catalog.

MP3200

IRUMA BUSINESS CENTER (SOLUTION CENTER)

480, Kamifujisawa, Iruma, Saitama, 358-8555, Japan
Phone +81-4-2962-5151 Fax +81-4-2962-6138
<http://www.yaskawa.co.jp>

YASKAWA AMERICA, INC.

2121, Norman Drive South, Waukegan, IL 60085, U.S.A.
Phone +1-800-YASKAWA (927-5292) or +1-847-887-7000 Fax +1-847-887-7310
<http://www.yaskawa.com>

YASKAWA ELÉTRICO DO BRASIL LTDA.

777, Avenida Piraporinha, Diadema, São Paulo, 09950-000, Brasil
Phone +55-11-3585-1100 Fax +55-11-3585-1187
<http://www.yaskawa.com.br>

YASKAWA EUROPE GmbH

Hauptstraße 185, 65760 Eschborn, Germany
Phone +49-6196-569-300 Fax +49-6196-569-398
<http://www.yaskawa.eu.com> E-mail: info@yaskawa.eu.com

YASKAWA ELECTRIC KOREA CORPORATION

35F, Three IFC, 10 Gukjegeumyung-ro, Yeongdeungpo-gu, Seoul, 07326, Korea
Phone +82-2-784-7844 Fax +82-2-784-8495
<http://www.yaskawa.co.kr>

YASKAWA ELECTRIC (SINGAPORE) PTE. LTD.

151, Lorong Chuan, #04-02A, New Tech Park 556741, Singapore
Phone +65-6282-3003 Fax +65-6289-3003
<http://www.yaskawa.com.sg>

YASKAWA ELECTRIC (THAILAND) CO., LTD.

59, 1st-5th Floor, Flourish Building, Soi Ratchadapisek 18, Ratchadapisek Road, Huaykwang, Bangkok 10310, Thailand
Phone: +66-2-017-0099 Fax: +66-2-017-0799
<http://www.yaskawa.co.th>

YASKAWA ELECTRIC (CHINA) CO., LTD.

22F, One Corporate Avenue, No.222, Hubin Road, Shanghai, 200021, China
Phone +86-21-5385-2200 Fax +86-21-5385-3299
<http://www.yaskawa.com.cn>

YASKAWA ELECTRIC (CHINA) CO., LTD. BEIJING OFFICE

Room 1011, Tower W3 Oriental Plaza, No.1, East Chang An Ave.,
Dong Cheng District, Beijing, 100738, China
Phone +86-10-8518-4086 Fax +86-10-8518-4082

YASKAWA ELECTRIC TAIWAN CORPORATION

12F, No. 207, Sec. 3, Beishin Rd., Shindian Dist., New Taipei City 23143, Taiwan
Phone: +886-2-8913-1333 Fax: +886-2-8913-1513 or +886-2-8913-1519
<http://www.yaskawa.com.tw>

YASKAWA**YASKAWA ELECTRIC CORPORATION**

In the event that the end user of this product is to be the military and said product is to be employed in any weapons systems or the manufacture thereof, the export will fall under the relevant regulations as stipulated in the Foreign Exchange and Foreign Trade Regulations. Therefore, be sure to follow all procedures and submit all relevant documentation according to any and all rules, regulations and laws that may apply. Specifications are subject to change without notice for ongoing product modifications and improvements.

© 2012 YASKAWA ELECTRIC CORPORATION

LITERATURE NO. KAEP C880725 02B <1>-5

Published in Japan April 2018
17-3-17